

434 MHz AM OOK Super-het Receiver

LOW COST & HIGH SENSITIVITY -114 dBm*

RX-4MM5 ++

P.N. 650200821G

Descrizione

Modello economico ad elevata sensibilità che, grazie a una nuova tecnica circuitale, non necessita di filtro SAW per garantire un'alta immunità ai disturbi.

* Generatore RF con modulazione 100%.


Description

Super-het receiver of AM modulated digital data, working at 433,92 Mhz frequency.
Pin to pin compatible with all OOK AUREL receivers.
High selectivity and sensibility.

* RF generator with 100% modulation

Pin-Out

- 1) N.C.
- 2) Ground
- 3) Antenna
- 7) Ground
- 11) AGC On-Off
- 13) RSSI Out - Test point
- 14) Data Out
- 15) +V

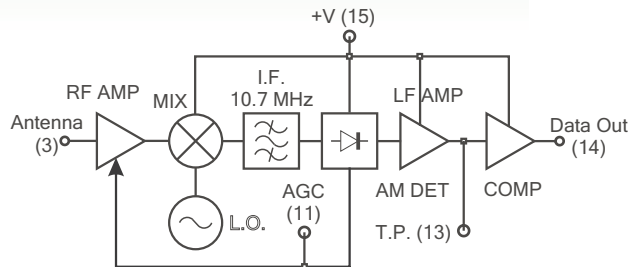


TECHNICAL SPECIFICATION

Ta = 25 °C


Characteristics		Min	Typ	Max	Unit
Supply Voltage	Alimentazione	4.5	5	5.5	Vdc
Supply Current	Corrente Assorbita		5.8	7	mA
Reception frequency	Frequenza di ricezione		433.92		MHz
RF sensitivity ⁽¹⁾	Sensibilità RF ⁽¹⁾	-110	-114	-115 ⁽¹⁾	dBm
IF Bandwidth - 3dB	Banda passante IF a - 3dB		300		KHz
Interference rejection at ± 10 Mhz	Reiezione alle Interferenze a ± 10 Mhz	60			dB
Square wave output	Onda quadra in uscita		2	3	KHz
Output high voltage	Livello alto d'uscita	Vs-0.6			V
Output low voltage	Livello basso d'uscita			GND+0.4	V
Antenna RF emission	Emissioni RF spurie in antenna			- 60	dB
Switch-on time	Tempo di accensione			0.3	ms
Operating temperature range	Temperatura di lavoro	-20		+80	°C

⁽¹⁾ RF generator with 100% modulation

Dimensions

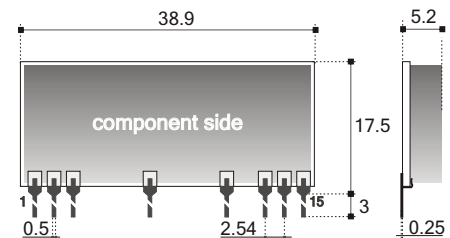

Component Side

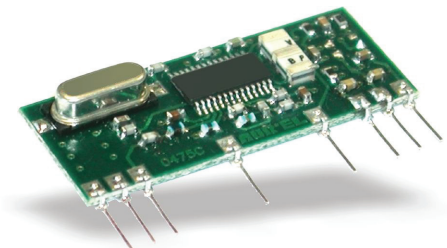

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [aurel](#) manufacturer:

Other Similar products are found below :

[650201276G](#) [650201392G](#) [650201271G](#) [650201454G](#) [650201455G](#) [650200910G](#) [650201089G](#) [650201268G](#) [650201009G](#) [RX-4MR50++](#)
[HCS-DEC-4](#) [650200847G](#) [SIR2008HCS/HT12E](#) [650201429G](#) [650201014G](#) [650201168G](#) [HCS-TX-3](#) [MAGCON HCS](#) [650201424G](#)
[650201415G](#) [650201133G](#) [650201425G](#) [650201476G](#) [650201165G](#) [650201226G](#) [650201044G](#) [650201431G](#) [650201088G](#) [650201473G](#)
[650200994G](#) [650201025G](#) [650200683G](#) [650201347G](#) [HCS-TX-2](#) [650201097G](#) [650201364G](#) [650201182G](#) [650201427G](#) [650200684G](#) [AS](#)
[433](#) [650201420G](#) [650200738G](#) [RX-4MR50-SMD](#) [650201001G](#) [T 433,92](#) [650201132G](#) [650200693G](#) [650201036G](#) [RX-4MHCS](#)
[650201527FG](#)