


## Buchsen / sockets

### BO 10

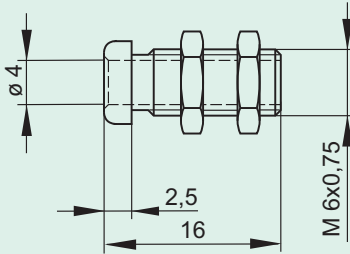

Produktbeschreibung	Product description		
Beschreibung	Description	Blanke Buchse, Durchmesser 4 mm, Messing, vernickelt, mit M6 Gewinde. Zum Einbau in Gerätechassis und Schalttafeln von 1,5 mm bis 8 mm Wandstärke.	Bright metal 4 mm diameter nickel-plated brass socket, with M6 thread. For installation in equipment chassis and switch panels from 1.5 mm till 8 mm wall thickness.
Typ	Type	<b>BO 10</b>	<b>BO 10</b>
Gehäusefarbe / Artikel-Nr.	Housing color / article-no.	930 160-000	
Zeichnung	Drawing		
<b>Technische Daten</b>	<b>Technical data</b>		
Kontaktart	Type of contact	ungefederte Buchse Ø 4mm	unsprung socket Ø 4mm
Anschlußart	Type of termination	M6 Gewinde	M6 thread
Bemessungsspannung	Rated voltage	30 VAC / 60 VDC	30 VAC / 60 VDC
Messkategorie lt. IEC61010	Measurement cat. acc. to IEC61010	CAT I	CAT I
Bemessungsstrom (Derating Kurve beachten)	Rated current (please consider derating curve)	16 A	16 A
Durchgangswiderstand	Contact resistance	5 mOhm	5 mOhm
Gehäusebefestigung	Mounting	schrauben	screw
<b>Werkstoff</b>	<b>Material</b>		
Kontaktmaterial	Contact material	Messing	brass
Kontaktflächenmaterial	Contact surface material	Nickel	nickel
Gehäusematerial	Housing material		
<b>Umgebungsbedingungen</b>	<b>Environmental conditions</b>		
Temperaturbereich	Temperature range	-25°C bis +100°C	-25°C to +100°C
<b>Brennbarkeitsklassen</b>	<b>Inflammability class</b>		
Gehäuse (Grundmaterial)	Housing (basic material)		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Plugs & Test Jacks](#) category:*

*Click to view products by [Hirschmann](#) manufacturer:*

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)  
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#) [R921934000](#)  
[R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#) [108-1000-106](#)  
[108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#)  
[BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R644543022](#) [R948142000](#)