


Catamount®



T&B Catalog Number: TNF18-4MB-XV
UPC Number: 72849414490
Description: Fully Insulated Nylon Male Bullet Disconnects for Wire Range 22-16 , Red

Status: Active

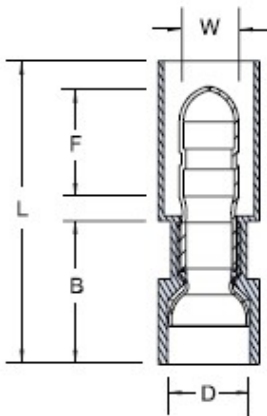

WEB_USE

-T&B Product Line -- 029

Features

- -- Fully Insulated. Metal Insulation Sleeve. Molded Insulator. Internal Barrel Serrations. Funnel Entry.

General

-Disconnect Type -- Male Bullet
 -Insulation Type -- Fully Insulated Nylon
 -Material -- Brass with Copper Sleeve
 -Color -- Red
 -Wire Range -- 22-16

Dimension Information

-B (inches) -- .394
 -D (inches) -- .157
 -F (inches) -- .413
 -L (inches) -- 1.063
 -T (inches) -- .016
 -W (inches) -- .157

Specifications

-Temperature Rating -- 105°C
 -Voltage Rating -- 600V
 -Flammability Rating -- UL 94 V-2

Tooling

-Application Tools -- WT112M, CM2000C

Packaging

-T&B Order Multiple -- 75
 -T&B Inner Pack -- 75
 -Package in Units -- 900
 -T&B Sold in UOM -- Each
 -T&B Weight Per UOM -- 0.34 lbs. per 100

Certifications

-RoHS Compliance -- Yes

Certifications



File Nbr:
E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
 8155 T&B Blvd.
 Memphis, TN 38125
 www.tnb.com

T&B Technical Support
 MS 3B-50
 8155 T&B Blvd.
 Memphis, TN 38125

Hours: 7AM - 6PM CDT
 Monday-Friday
 Phone: (888) 862-3289
 Fax: (901) 252-1321

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [abb](#) manufacturer:

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F362-25/0.03](#)

[GJL1211001R0011](#) [GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#)

[GJL1311201R0001](#) [GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [A40-30-10-84](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [B14-](#)

[250](#) [EF45-30](#) [ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#)

[1SDA057197R1](#) [1SFA611101R1002](#) [1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#)

[1SFA611215R1001](#) [1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#)

[1SVR730020R0200](#) [IPC4111](#) [OS30FACC12](#) [OS60GJ03](#)