

Printview: PUSH WIRE® connector for junction boxes; 4-conductor terminal block; transparent housing; orange cover - Item No.: 773-164

**WAGO**® online catalog / eShop

## PUSH WIRE® connector for junction boxes; 4-conductor terminal block; transparent housing; orange cover

Item No.: 773-164



PUSH WIRE® connector for junction boxes; 4-conductor terminal block; transparent housing; orange cover

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	773-164
GTIN / EAN	4044918398022
Content	1
Order amount	100
Customer item number	

### Notes

### Technical data

#### Miscellaneous

Total number of connection points	4
Total number of potentials	1
Color	transparent
Pollution degree (1)	2
Rated voltage EN (1) [V]	400 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	24 [A]
Connection technology (1)	PUSH WIRE®
Solid sizes 1	0.75 ... 2.5 mm <sup>2</sup> / 18 ... 12 AWG

Printview: PUSH WIRE® connector for junction boxes; 4-conductor terminal block; transparent housing; orange cover - Item No.: 773-164

---


<b>Technical data</b>	
<i>Strip length 1</i>	<i>12 mm / 0.47 in</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Fire load [MJ]</i>	<i>0.057 [MJ]</i>
<i>Weight [g]</i>	<i>2.677 [g]</i>
<i>Width</i>	<i>13 mm / 0.512 in</i>
<i>Height</i>	<i>13.1 mm / 0.516 in</i>
<i>Length</i>	<i>19.5 mm / 0.768 in</i>
<i>Safety information 1</i>	<i>In grounded power lines</i>

Printview: PUSH WIRE® connector for junction boxes; 4-conductor terminal block; transparent housing; orange cover - Item No.: 773-164

---

### Images & drawings



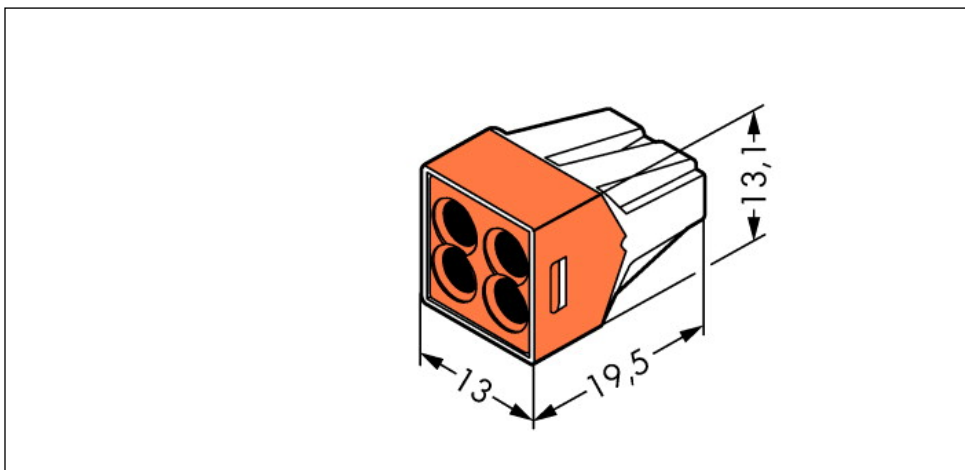

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [wago manufacturer](#):*

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000\\_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#)