



## NTE398 Silicon PNP Transistor TV Vertical Output (Compl to NTE375)

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)



Collector–Base Voltage, $V_{CBO}$	.....	200V
Collector–Emitter Voltage, $V_{CEO}$	.....	150V
Emitter–Base Voltage, $V_{EBO}$	.....	5V
Collector Current, $I_C$		
Continuous .....	.....	2A
Pulsed (Note 1) .....	.....	3A
Collector Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_C$	.....	25W
Operating Junction Temperature, $T_J$	.....	+150°C
Storage Temperature Range, $T_{stg}$	.....	−55° to +150°C

Note 1. Pulse Width  $\leq 10\text{ms}$ , Duty Cycle  $\leq 50\%$ .

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 150\text{V}$ , $I_E = 0$	—	—	50	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 4\text{V}$ , $I_C = 0$	—	—	50	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE} = 10\text{V}$ , $I_C = 400\text{mA}$ , Note 2	60	—	120	
Gain Bandwidth Product	$f_T$	$V_{CE} = 10\text{V}$ , $I_C = 400\text{mA}$ , Note 2	—	5	—	MHz
Collector–Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 500\text{A}$ , $I_B = 50\text{mA}$	—	—	1.0	V

Note 2. Pulse Width  $\leq 350\mu\text{s}$ , Duty Cycle  $\leq 25\%/\text{Pulsed}$ .

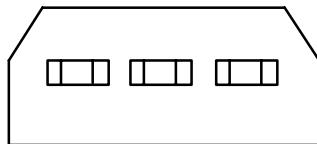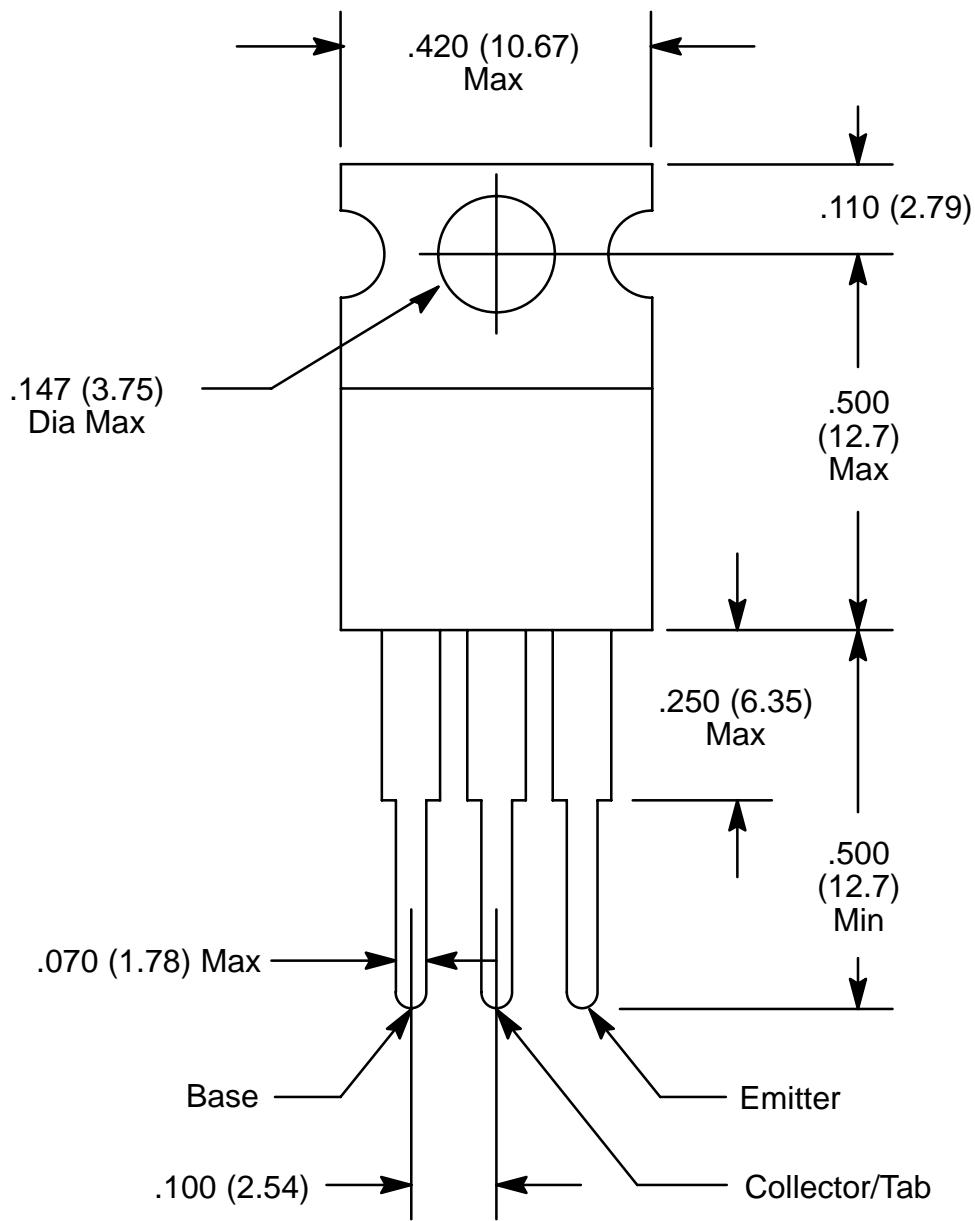

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by NTE manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)