




# Chicago Miniature Lighting, LLC

*Lighting the world since 1910*


T-1 3/4 Wedge Base & T-13/4 Midget Screw Base

## T-1 3/4 Wedge Base

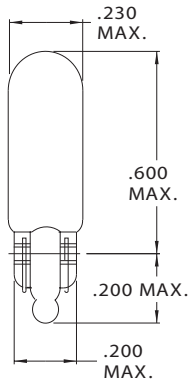

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM11	2.5	.200	.200	1,000	C-2R
CM111	2.7	.100	.230	5	S-2
CM56	5.0	.115	.150	20,000	C-2R
CM79	6.0	.200	.600	1,000	C-2R
CM16	6.3	.150	.340	5,000	C-2F
CM84	6.3	.040	.030	20,000	C-2R
CM86	6.3	.200	.400	20,000	C-2F
CM18	14.0	.040	.130	5,000	C-2F
CM37	14.0	.090	.500	1,500	C-2F
CM70	14.0	.150	1.50	100	C-2F
CM73	14.0	.080	.300	15,000	C-2F
CM74	14.0	.100	.700	500	C-2F
CM17	28.0	.065	.650	5,000	C-2F
CM85	28.0	.040	.300	7,000	C-2F

## T-1 3/4 Midget Screw Base

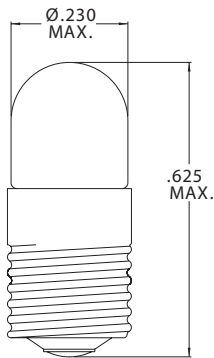

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM8669	1.35	.060	.010	500	C-6
CM1767	2.50	.200	.200	500	C-2R
CM1769	2.50	.200	.200	500	C-2R
CM8693	2.70	.060	.040	6,000	C-2R
CM3153	5.00	.060	.150	5,000	C-2R
CM342	6.00	.040	.030	10,000	C-2V
CM1768	6.00	.200	.600	1,000	C-2R
CM7323	6.00	.200	.550	5,000	C-2R
CM378	6.30	.200	.400	20,000	C-2F
CM1775	6.30	.075	.230	1,000	C-2R
CM389	10.0	.040	.080	5,000	C-2F
CM373	14.0	.080	.500	1,500	C-2F
CM383	14.0	.080	.500	750	C-2F
CM8162	14.0	.100	.500	10,000	C-2F
CM8362	14.0	.080	.300	15,000	C-2F
CM8536	18.0	.040	.150	10,000	C-2F
CM335	28.0	.040	.340	4,000	C-2F
CM335LSV	28.0	.060	.340	25,000	C-2F
CM369	28.0	.040	.340	4,000	C-2F
CM399	28.0	.040	.300	7,000	C-2F
CM8369	28.0	.065	.650	15,000	C-2F
CM8384	28.0	.040	.150	10,000	C-2F

147 Central Avenue  
Hackensack, NJ 07601  
Phone: (201) 489-8989  
Fax: (201) 489-6911

18703 Dix Toledo Road  
Brownstown, MI 48193

Saret Zone Franca, Edificio B  
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [cml manufacturer](#):*

Other Similar products are found below :

[19050257](#) [1860623W3A](#) [19010351](#) [19300133](#) [192A0255](#) [19211252](#) [19050253](#) [19031353](#) [19241354](#) [195A1350](#) [SK-3-2500](#) [6346002505R](#)  
[6275AL](#) [19041051](#) [19010053](#) [19180351](#) [19272351](#) [19051357](#) [19050357](#) [19010350](#) [19000352](#) [T000205](#) [1860325W3D](#) [19000353](#) [W592](#)  
[SK-2-2500](#) [192A1355](#) [7632](#) [18600M51](#) [19210363](#) [19272350](#) [1512145UR3](#) [T000015](#) [1927235WA](#) [190403Z2](#) [19211253](#) [19740135](#)  
[192D0000](#) [19240354](#) [192D0230](#) [1511A35W3A](#) [W643](#) [19272352](#) [190A2351](#) [18606232](#) [19740235](#) [1512135UG3](#) [T010309](#) [19031253](#)  
[1511A45W3D](#)