

0600 Toggle Switches 1A 250Vac

toggle switches



C0600HD - - -



C0600CC - - -



C0602SC - - -

- ▶ Toggle switch
- ▶ Brass and nylon actuators
- ▶ Single pole
- ▶ Latching and momentary action
- ▶ Choice of actuator profiles

Approvals and specifications

In house test: 1A 250Vac — Indicative rating only
3A 12/24Vdc — Indicative rating only


3mm contact gap.
Technical data on pages 4 & 5.

C 0600 H D - - -
TERMINAL FUNCTION ACTUATOR BODY OPTIONS


▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>0600</p> <p>ON - OFF</p>	<p>C Chromed brass (0600)</p> <p>15.0</p> <p>U Nylon (0600)</p> <p>12.1</p> <p>G Nylon (0600)</p> <p>27.0</p>	<p>D Nylon neck and top plate (Used with actuator codes U, G and H)</p> <p>C Metal neck and top plate (Used with actuator codes C and S)</p> <p>Panel thickness - 3.5mm Back nut must be fitted</p>	<p>Cover A0331M0AAA (C Actuator only)</p> <p>Neck Seal A0539M0AAA (C, H & U Actuators) Actuator visible</p>
	<p>0602</p> <p>ON - OFF (momentary ON)</p>	<p>H Nylon (0600)</p> <p>17.0</p> <p>S Chromed brass stem/ nylon paddle (0602 only)</p> <p>41.8</p>	<p>Fixing nuts (Standard is M506 & T92)</p> <p>T5 Hex brass</p> <p>M506 Hex nylon</p> <p>3.0 (M506) 2.0 (T5)</p> <p>T92 Knurled brass - slotted</p> <p>16.0</p> <p>M279 Knurled nylon</p> <p>16.2</p> <p>4.1</p>	<p>Cover A1080M0AAA (C Actuator only)</p> <p>Covers have internal nylon nuts.</p>

Dimensions (mm)

0600 (U actuator shown)



0602

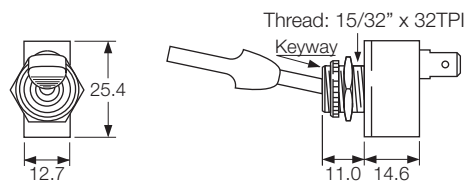

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switch Hardware](#) category:

Click to view products by [Arcoelectric](#) manufacturer:

Other Similar products are found below :

[893102000](#) [LZZ1A](#) [0098.9234](#) [61-9707.7](#) [61-9771.0](#) [M2PA-5011](#) [635401](#) [6PA104](#) [6PA113](#) [6PA147-E6](#) [6PA148-E6](#) [6PA32](#) [6PA9](#) [700106](#)
[700109](#) [700201A56](#) [700303A56](#) [700701264](#) [700C1GRY](#) [700C2GRN](#) [704-6001](#) [704.960.4](#) [704.960.9](#) [704.965.1](#) [704.965.2](#) [704.965.6](#)
[704.966.0](#) [7089-3](#) [71M1048](#) [757200264](#) [778000A56](#) [79215938](#) [MHU35](#) [MHU37](#) [825.003.011](#) [825.005.011](#) [825.053.011](#) [825.055.011](#)
[826.000.071](#) [827.020.011](#) [827.400.021](#) [835.900.023](#) [MML52C10C](#) [MML52E10C](#) [MML72EEK](#) [MML92HGH](#) [MML93K](#) [84211M02CNNS](#)
[84211M02LGRS](#) [84211M02LNNX3](#)