


Features

- PC Mountable
- Only 1.1 Cubic Inches
- Long Life
- Low Power Coil Types (L-suffix)



SPDT, 1 Form "C"




DC OPERATED						
NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Cur. @ 28VDC or 120VAC	Diag No.
R48-5D5-6L	5/6VDC	SPDT	340	110mW	5A	D24
R48-5D5-12L	12VDC	SPDT	1350	100mW	5A	D24
R48-5D5-24L	24VDC	SPDT	5400	100mW	5A	D24
R48-5D10-6	5VDC	SPDT	100	110mW	10A	D24
R48-5D10-12	12VDC	SPDT	600	110mW	10A	D24
R48-5D10-24	24VDC	SPDT	2400	250mW	10A	D24

R48 Series



Miniature, General Purpose, 5 Amp & 10 Amp, DC, SPDT Relays for TV Remote Control, Burglar Alarms, Timers, Garage Door Openers.

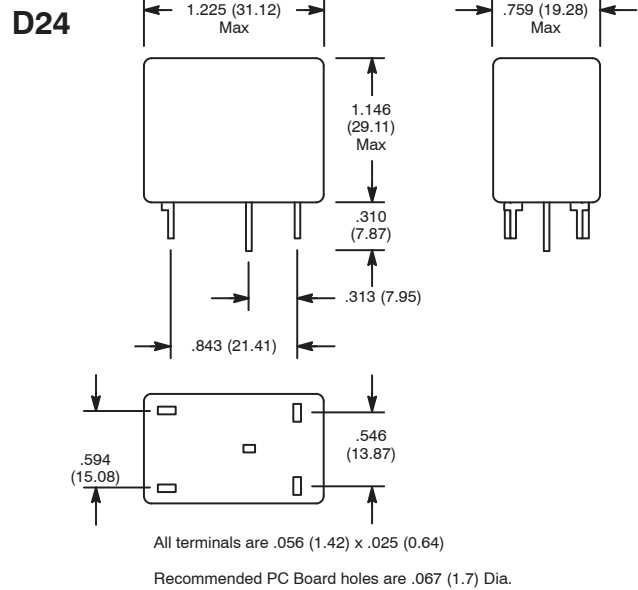

Electrical Specifications

Contact

Rating: 5 Amp 120/240 VAC
10 Amp 28 VDC resistive load
Material: Silver, gold plated
(R48-5D5-12L, R48-5D5-24L, R48-5D10-24)
Silver alloy
(R48-5D5-6L, R48-5D10-6, R48-5D10-12)

Coil

Coil Voltages: See Chart
Pick-up Voltages: 80% of nominal Coil Vltg.
Drop-out Voltages: 10% of actual pick-up (min.)
Resistance: See Chart

Operational Characteristics

Timing Value **Operate Time:** 25 mS
Release Time: 3 mS typ.

Insulation Characteristics

Dielectric Strength
Contact To Coil Voltages: 1500 VRMS
Across Open Contacts: 500 VRMS
Coil To Frame: 1500 VRMS
Resistance: 1000 megohms min.
@ 500 VDC

Environmental Characteristics

Operating: -55 C to +85 C
Soldering: 270 C (518 F) max
Life
Mechanical: 10,000,000 operations
Weight
Std: 1.5 oz (42 grams) approx

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)