


Features

- P.C. Board Mountable
- Miniature Size
- Epoxy Sealed
- Vented Cover-Fully Enclosed
- SPST & SPDT Versions
- Cut-off Nib for Vent Hole



SPST-NO, 1 Form "A" SPDT, 1 Form "C"

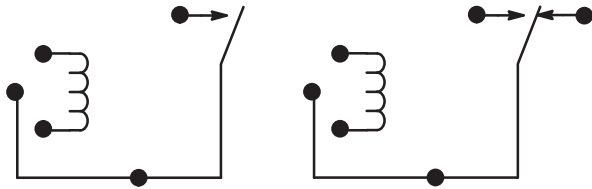


DC OPERATED						
NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Cur. @ 28VDC or 240VAC	Diag No.
R53-1D30-6	6VDC	SPST-NO	40	900mW	30A	D33
R53-1D30-12	12VDC	SPST-NO	155	900mW	30A	D33
R53-1D30-24	24VDC	SPST-NO	660	900mW	30A	D33
R53-5D20-6	6VDC	SPDT	40	900mW	20A	D33
R53-5D20-12	12VDC	SPDT	155	900mW	20A	D33
R53-5D20-24	24VDC	SPDT	660	900mW	20A	D33
R53-5D20-48	48VDC	SPDT	2550	900mW	20A	D33
R53-5D20-110	110VDC	SPDT	13,450	900mW	20A	D33

R53 Series



Miniature 30 Amp & 20 Amp Industrial Relays for Automotive Controls, Industrial Timers, Process Controls.

D33

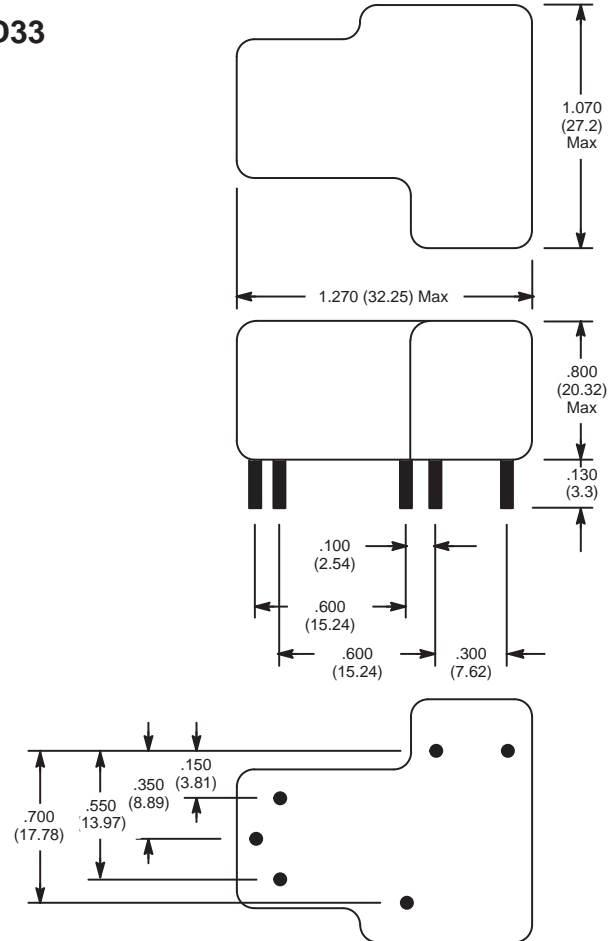

Electrical Specifications

Contact

Rating: 1 Form A (SPST), 30 Amps at 240 VAC,
1 Form C (SPDT), 20 Amps at 240 VAC.

Coil

Coil voltages: See Chart

Coil resistances: 900mW Nominal

Operational Characteristics

Timing valves: Operate & Release 10-15 mS

Insulation Characteristics

Dielectric strength: 1500 VRMS, 60Hz./1 sec

Environmental Characteristics

Ambient temperature range: -55°C to +85°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)
[5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#)
[NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-](#)
[SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-](#)
[GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#)