


Single pole, multiclamp terminal blocks

Screw clamp


DIN 1 - 3

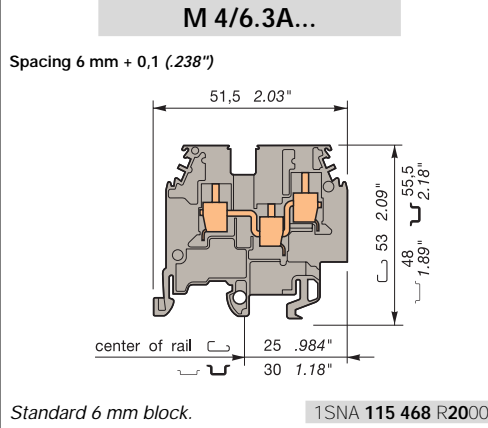

Colour Type Part numbers

Standard blocks

Grey	□	M 4/6.3A	1SNA 115 468 R2000
Blue	■	M 4/6.3A.N	1SNA 125 468 R2200
Beige V0	■	M 4/6.3A.V0	1SNA 195 468 R2100
<i>M 4/6.3A with partition</i>			
Grey	□	M 4/6.3A.1	1SNA 115 483 R0000



Standard 6 mm block. 1SNA 115 468 R2000

Accessories

- 1 End section
grey
blue
yellow
beige
- 2 Circuit separator
grey
blue
yellow
beige
- 3 Test socket
- 4 Test device
- 5 Test plug
- 6 Assembled jumper bar
32 A
32 A
32 A
32 A
32 A
32 A
(without IP 20 protection)
- 7 Assembled jumper bar
32 A
32 A
32 A
32 A
32 A
32 A
(with IP 20 protection)
- 8 Jumper bar not assembled
Post + screw + washer
Post + screw + washer IP20
- 9 Connector plate
- 11 Jumper
- 12 Alternated jumper bar
- 13 Universal jumper bar
- 14 Pivoting jumper bar
- 15 Comb-type jumper bar
- 16 IDC jumper

Type Part numbers

FEM3A	th. 3,0 mm	1SNA 116 576 R1500
FEM3A	th. 3,0 mm	1SNA 126 576 R1700
FEM3A	th. 3,0 mm	1SNA 103 862 R2000
FEM3A V0	V0 th. 3,0 mm	1SNA 196 576 R1600
SCM6		1SNA 113 003 R1000
SCM6		1SNA 123 003 R1200
SCM6		1SNA 103 020 R2300
SCM6 V0	V0	1SNA 193 003 R1100
AL2	(1) DIA. 2,0 mm	1SNA 163 043 R2100
AL3	(1) DIA. 3,0 mm	1SNA 163 261 R0000
DCJ	yellow	1SNA 173 059 R0300
FC2	DIA. 2,0 mm	1SNA 007 865 R2600
BJM6	(1)(2) 2 poles	1SNA 168 516 R2500
BJM6	(1)(2) 3 poles	1SNA 168 517 R2600
BJM6	(1)(2) 4 poles	1SNA 168 518 R0700
BJM6	(1)(2) 5 poles	1SNA 168 519 R0000
BJM6	(1)(2) 10 poles	1SNA 168 973 R0700
BJMI6	(1)(2) 2 poles	1SNA 176 663 R0000
BJMI6	(1)(2) 3 poles	1SNA 176 664 R0100
BJMI6	(1)(2) 4 poles	1SNA 176 665 R0200
BJMI6	(1)(2) 5 poles	1SNA 176 666 R0300
BJMI6	(1)(2) 10 poles	1SNA 176 667 R0400
BJS6	(1)(2) 20 poles	1SNA 174 784 R2000
EV6		1SNA 168 604 R1600
EV6 I		1SNA 206 394 R0200
EL6		1SNA 173 627 R2100
BJB		1SNA 199 466 R2300
BJA6	(1)(2)	1SNA 116 541 R1200
BJDP1	(1)(2) spacing 6 <-> spacing 16	1SNA 179 623 R0300
BJDP3	(1)(2) spacing 6 <-> spacing 12	1SNA 179 625 R0500
BJDP4	(1)(2) spacing 6 <-> spacing 8 or 10	1SNA 174 781 R2500
BJP6	(1)(2)	1SNA 174 413 R1400
PC6	2 poles	1SNA 113 546 R1400
PC6	3 poles	1SNA 116 536 R0500
PC6	4 poles	1SNA 116 537 R0600
PC6	10 poles	1SNA 113 548 R2600
EIP		1SNA 113 550 R2400
AD2,5		1SNA 114 205 R2000

refer to the section "Special Applications" for part numbers and characteristics.

End stop	th. 9 mm	BADL	V0	1SNA 399 903 R0200
End stop	th. 10 mm	BAM2	V2	1SNA 206 351 R1600
End stop	th. 10 mm	BAM2 V0	V0	1SNA 296 351 R0000
Rail	35 x 7,5 x 1	PR3.Z2		1SNA 174 300 R1700
Rail	35 x 15 x 2,3	PR4		1SNA 168 500 R1200
Rail	35 x 15 x 1,5	PR5		1SNA 168 700 R2200
Rail	32 x 15 x 1,5	PR1.Z2		1SNA 163 050 R0400

Other end stops, rails and accessories : see section on accessories.

Characteristics

Wire size		IEC NFC DIN	UL	CSA
Screw clamp	Solid wire	0,2-4 mm ²	22-10 AWG	12 AWG maxi.
	Stranded wire	0,22-4 mm ²	22-10 AWG	12 AWG maxi.

Voltage			
Rated	800 V	600 V	600 V
Pulse	8 kV		
Pollution degree	3		

Current			
Rated	32 A	20 A	25 A

Wire size			
Rated / Gauge	4 mm ² / A4	10 AWG	12 AWG
Wire strip length	Recomm. Screwdriver	Recomm. torque	Protection
9,5 mm	4 mm	0,5-0,8 Nm	IP 20
.37"	.157"	4,4-7,1 lb.in	NEMA 1

Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.



R See section on marking methods

RC65 - RC610 RCT610

Nota : (1) A circuit separator SC may be required with the use of these accessories.
(2) Use of these accessories requires the user to cut out the partition of the terminal block M 4/6.3A.1.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [entrelec](#) manufacturer:

Other Similar products are found below :

[023000012](#) [023103024](#) [023000107](#) [1SNK505310R0000](#) [011762822](#) [016511417](#) [016340320](#) [1SNK516020R0000](#) [023300421](#)

[1SNK510010R0000](#) [018731214](#) [011870703](#) [010500220](#) [011511607](#) [023300227](#) [016049626](#) [017666704](#) [1SNK508411R0000](#) [023300320](#)

[023300001](#) [016548827](#) [012511813](#) [017301610](#) [011546820](#) [010500127](#)