


## Features

- P.C. Board Mountable
- Miniature Size
- Epoxy Sealed
- Vented Cover-Fully Enclosed
- SPST & SPDT Versions
- Cut-off Nib for Vent Hole



SPST-NO, 1 Form "A" SPDT, 1 Form "C"

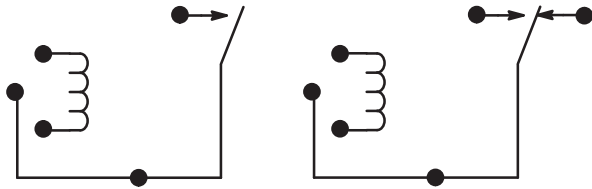


DC OPERATED						
NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. Ohms (Typ)	Nom. Power	Max. Contact Cur. @ 28VDC or 240VAC	Diag No.
R53-1D30-6	6VDC	SPST-NO	40	900mW	30A	D33
R53-1D30-12	12VDC	SPST-NO	155	900mW	30A	D33
R53-1D30-24	24VDC	SPST-NO	660	900mW	30A	D33
R53-5D20-6	6VDC	SPDT	40	900mW	20A	D33
R53-5D20-12	12VDC	SPDT	155	900mW	20A	D33
R53-5D20-24	24VDC	SPDT	660	900mW	20A	D33
R53-5D20-48	48VDC	SPDT	2550	900mW	20A	D33
R53-5D20-110	110VDC	SPDT	13,450	900mW	20A	D33

# R53 Series



Miniature 30 Amp & 20 Amp Industrial Relays for Automotive Controls, Industrial Timers, Process Controls.

D33

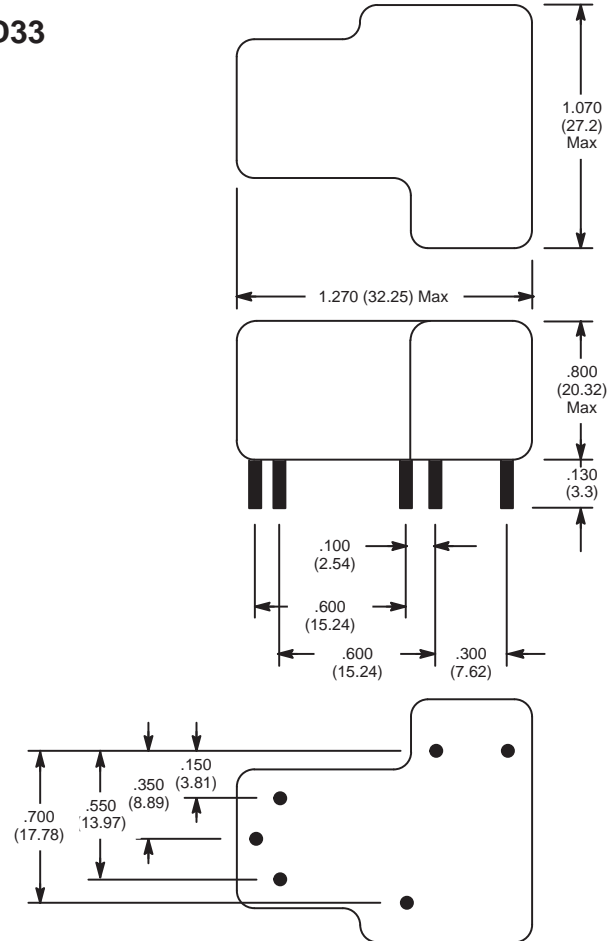

## Electrical Specifications

### Contact

**Rating:** 1 Form A (SPST), 30 Amps at 240 VAC,  
1 Form C (SPDT), 20 Amps at 240 VAC.

### Coil

**Coil voltages:** See Chart

**Coil resistances:** 900mW Nominal

### Operational Characteristics

**Timing valves:** Operate & Release 10-15 mS

### Insulation Characteristics

**Dielectric strength:** 1500 VRMS, 60Hz./1 sec

### Environmental Characteristics

**Ambient temperature range:** -55°C to +85°C

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [NTE](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)