



# Sta-Kon®

**Disconnects**

**T&B Catalog Number:**

RAS18-250AX

**UPC Number:**

78621007075

**Status:**

Active

**Description:**

Heat-Shrinkable Polyolefin Female - 250 Series Disconnects For Wire Range 22-18 Length 1.82, Tab Size .250 x .032 , Red

**WEB\_USE**

US Cutsheet PDF Catalog Link

<http://www-public.tnb.com/contractor/docs/stakon.pdf>

**Features**

Unique construction of the female disconnect offers long-term dependability. Brazed seam serrated barrel provides maximum tensile strength.

**General**

|                 |                            |
|-----------------|----------------------------|
| Disconnect Type | Female - 250 Series        |
| Insulation Type | Heat-Shrinkable Polyolefin |
| Terminal Series | RAS                        |
| Material        | Brass                      |
| Finish          | Electro -Tin Plated        |
| Color           | Red                        |
| Wire Range      | 22-18                      |
| Tab Size        | .250 x .032                |

**Dimension Information**

|                             |      |
|-----------------------------|------|
| Maximum Insulation (inches) | .170 |
| A (inches)                  | 1.82 |

**Specifications**

|                     |           |
|---------------------|-----------|
| Temperature Rating  | 150°C     |
| Voltage Rating      | 600V      |
| Flammability Rating | UL 94 V-0 |

**Tooling**


|                   |                      |
|-------------------|----------------------|
| Tool Charts       | Available on Website |
| Application Tools | WT1255               |
| Recommended Tool  | ERG4255              |

**Packaging**

|                    |                  |
|--------------------|------------------|
| T&B Order Multiple | 25               |
| T&B Inner Pack     | 25               |
| Package in Units   | 250              |
| Package Type       | Standard         |
| T&B Sold in UOM    | Each             |
| T&B Weight Per UOM | 0.8 lbs. per 100 |

**Application Support**

|                   |                      |
|-------------------|----------------------|
| Overview          | Available on Website |
| Wire Guide Tables | Available on Website |

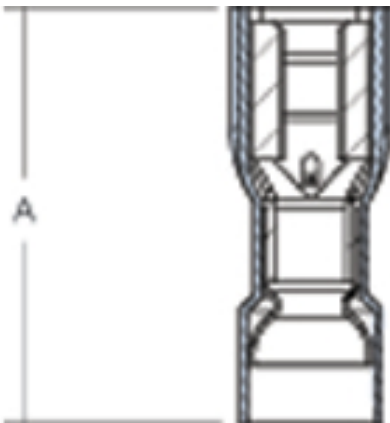

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [abb](#) manufacturer:*

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F362-25/0.03](#)

[GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#) [GJL1311201R0001](#)

[GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [A40-30-10-84](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [B14-250](#) [EF45-30](#)

[ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#)

[1SBL157001R1310](#) [1SBL277001R1300](#) [1SBN010110R1001](#) [1SBN010110R1010](#) [1SBN010140R1022](#) [1SDA057197R1](#) [1SFA611101R1002](#)

[1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611215R1001](#)

[1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#)