



Sta-Kon®

Disconnects

T&B Catalog Number:

RB14D

UPC Number:

78621080429

Status:

Active

Description:

Insulated Nylon Wristlock Disconnects For Wire Range 16-14 Length 0.99, Blue

WEB_USE

US Cutsheet PDF Catalog Link

<http://www-public.tnb.com/contractor/docs/stakon.pdf>

General

Disconnect Type	Wristlock
Insulation Type	Insulated Nylon
Terminal Series	RB
Material	Brass
Finish	Electro -Tin Plated
Color	Blue
Wire Range	16-14

Dimension Information

Maximum Insulation (inches)	.162
Stock Thickness	.03
A (inches)	.99

Specifications

Temperature Rating	105°C
Voltage Rating	600V
Flammability Rating	UL 94 V-2

Tooling

Tool Charts	Available on Website
Recommended Tool	WT2000

Packaging

T&B Order Multiple	50
T&B Inner Pack	50
Package in Units	250
Package Type	Standard
T&B Sold in UOM	Each
T&B Weight Per UOM	0.39 lbs. per 100
Alternate Package Qty	RB23

Application Support


Wire Guide Tables	Available on Website
-------------------	----------------------

Notes

Picture shows wristlock assembled as 2 pieces. Parts are sold by the piece, not assemblies.

Certifications

RoHS Compliance	Yes
-----------------	-----

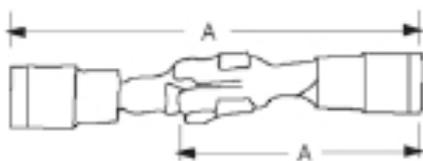

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [abb](#) manufacturer:

Other Similar products are found below :

[TV10-516R](#) [017667013](#) [RF727](#) [2CMA100178R1000](#) [5SDD 92Z0401](#) [ESV14-BS](#) [EZS-21-250](#) [F204AC-40/0.03](#) [F362-25/0.03](#)

[GJL1211201R8000](#) [GJL1211501R8000](#) [GJL1213001R0017](#) [GJL1213001R0101](#) [GJL1311001R0101](#) [GJL1311001R8010](#) [GJL1311201R0001](#)

[GJL1313001R0011](#) [GJL1313001R0101](#) [GJL1317201R0001](#) [A40-30-10-84](#) [AF09-30-01-11](#) [AF460-30-11-68](#) [1455](#) [B14-250](#) [EF45-30](#)

[ERG297](#) [HSC2-20](#) [1SAM201904R1001](#) [1SAM350000R1003](#) [1SAZ721201R1009](#) [1SAZ721201R1014](#) [1SAZ721201R1025](#)

[1SBL157001R1310](#) [1SBL277001R1300](#) [1SBN010110R1001](#) [1SBN010110R1010](#) [1SBN010140R1022](#) [1SDA057197R1](#) [1SFA611101R1002](#)

[1SFA611130R1103](#) [1SFA611131R1101](#) [1SFA611143R1101](#) [1SFA611202R1108](#) [1SFA611203R1108](#) [1SFA611215R1001](#)

[1SFA611216R1108](#) [1SFA611285R1002](#) [1SFA611702R6006](#) [1SFA616162R1025](#) [1SFA619100R3015](#)