



FERROCORE PEAKING COILS/COIL0810 TYPE

FEATURES


- ◆ Small size radial lead type
- ◆ Available taped for auto insertion
- ◆ Excellent characteristics for high Q
- ◆ Special lead wire construction prevents open circuit failures.




APPLICATIONS

- ◆ TVs and Audio equipment
- ◆ Switching Power Supplies
- ◆ Buzzers and Alarm systems
- ◆ Telecommunication devices and etc.

ORDERING CODE

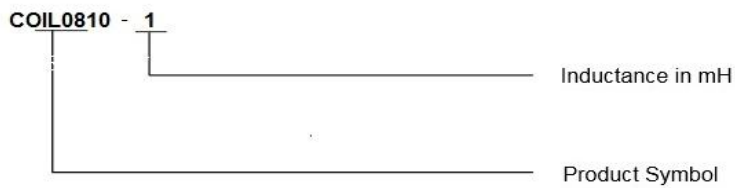

SHAPES

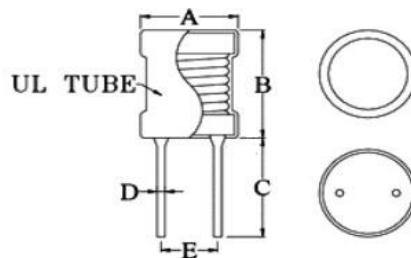

DIMENSIONS UNIT: mm

Part No.	A (Max)	B (Max)	C (Min)	D (± 0.05)	E (Ref.)
COIL0810	9.5	11.5	13	0.65	5.0



FERROCORE PEAKING COILS/COIL0810 TYPE

ELECTRICAL CHARACTERISTICS FOR COIL0810			
Part No.	Inductance (μ H)	DC Resistance (Ω) Max	Rated Current (A) Max
COIL0810-0.1	100	0.18	1.7
COIL0810-0.22	220	0.38	1.15
COIL0810-0.33	330	0.59	0.92
COIL0810-0.47	470	1	0.7
COIL0810-0.56	560	1.1	0.6
COIL0810-0.68	680	1.49	0.8
COIL0810-1	1000	1.81	0.5
COIL0810-1.2	1200	3.64	0.49
COIL0810-1.5	1500	3	0.41
COIL0810-1.8	1800	3.66	0.4
COIL0810-10	10000	21.9	0.16
COIL0810-18	18000	38	0.15
COIL0810-2.2	2200	7	0.35
COIL0810-22	22000	48.1	0.11
COIL0810-3.3	3300	6.8	0.29
COIL0810-3.9	3900	8	0.2
COIL0810-33	33000	90.6	0.07
COIL0810-4.7	4700	13.3	0.24

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Ferrocore](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)