

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED MFG CODE 91929

SWITCH - BASIC

CATALOG LISTING

2HM19-5

MILITARY STANDARD
MS-27216-4

2HM19-5
PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
7

REPLACES

RELEASE NO. PR-1434

CHECK

70

20

AUG

70

CHECK

70



20

AUG

70

CHECK

70

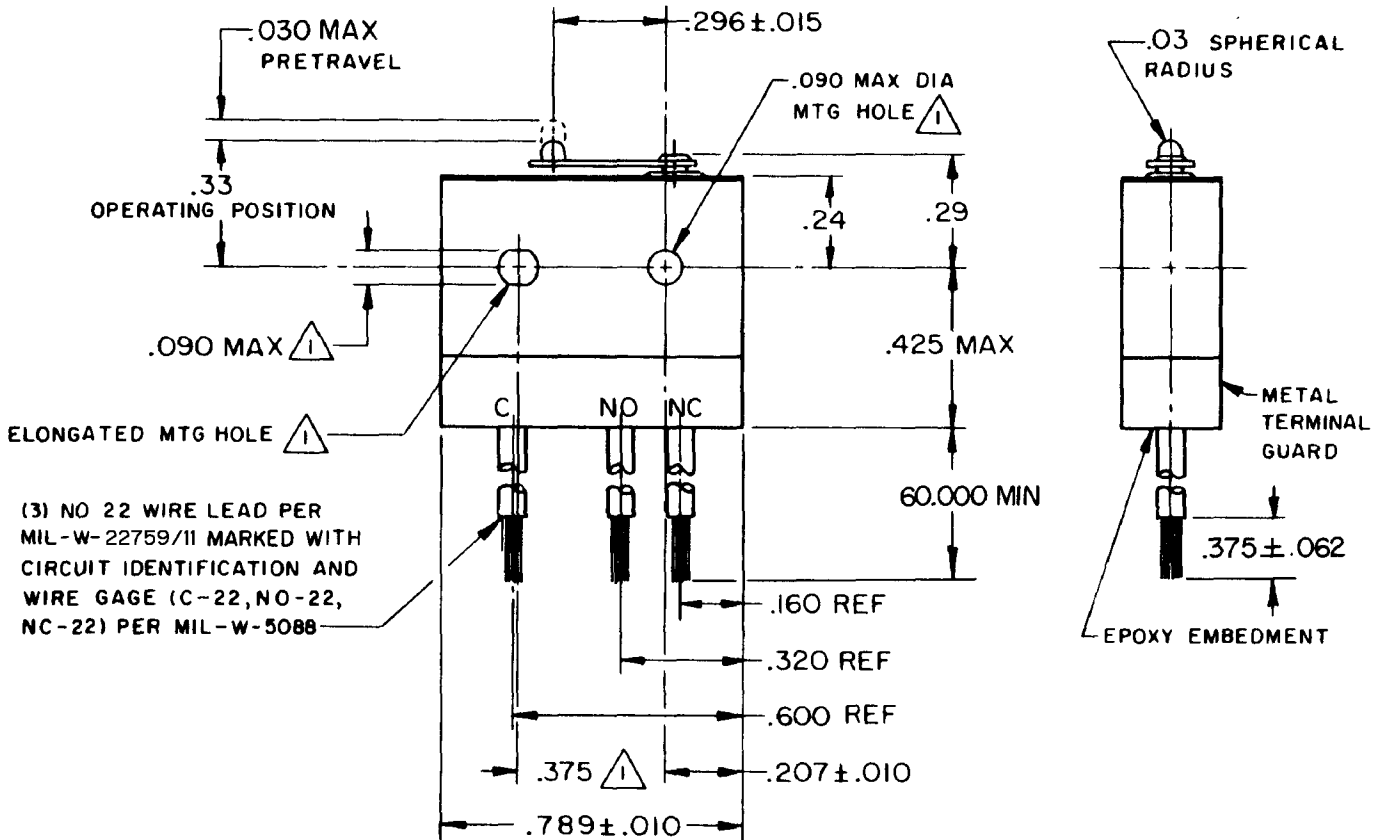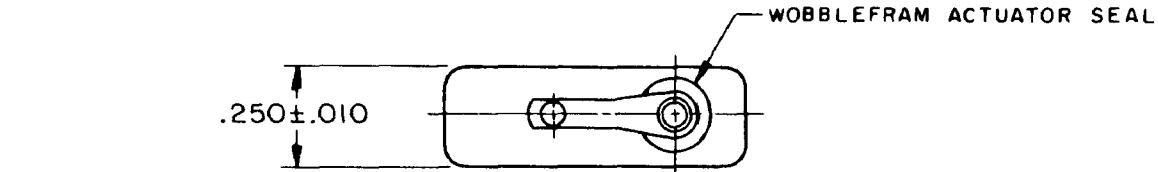

(3) NO 22 WIRE LEAD PER MIL-W-22759/II MARKED WITH CIRCUIT IDENTIFICATION AND WIRE GAGE (C-22, NO-22, NC-22) PER MIL-W-5088

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2 - FOR USE IN TEMPERATURE RANGE -85° F TO +257° F
 - 3 HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
 - 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
 - 5 WEIGHT OF SWITCH ONLY IS 0.22 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 1.0 OZ MAX PER FOOT
 - 6 - DO NOT APPLY MORE THAN 1 1/2 INCH-POUNDS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE 2 TO 1	
OPERATING FORCE --- 7 OZ MAX		CONTACT ARRANGEMENT S P D T			DO NOT SCALE PRINT	
RELEASE FORCE --- 1 OZ MIN		LOAD	SEA LEVEL		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE () ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±	
DIFFERENTIAL TRAVEL --- .006 MAX			28 VDC	115 VAC, 400 CPS		70,000 FT 28 VDC
OVERTRAVEL --- .003 MIN		RESISTIVE	4 AMP	2 AMP		4 AMP
		INDUCTIVE	2 AMP	2 AMP		2 AMP
		LAMP	1 AMP	.5 AMP	1 AMP	
		WEIGHT			5	

FORMTEK
FO-90378 - 1A

DRAWN

LSD 20 AUG 70

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [honeywell](#) manufacturer:

Other Similar products are found below :

[MML93J](#) [3010A](#) [LZJ3-7M](#) [LTPCTAA50UEBITX01](#) [MPRLS0001PG0000SAB](#) [LZZ7J3-7M](#) [76072-00000150-15](#) [NSCDRRN030PDUNV](#)
[NSCDRRN001PGUNV](#) [14CE2-2](#) [91MCE2-S5](#) [SE3450-013](#) [GLLA06A1B](#) [3600080010001](#) [23944-01](#) [53C110K](#) [58C1-25](#) [58C1-3K](#)
[591SXP56S252SC](#) [5ML1-E1](#) [5SE1-12](#) [602HE1-6](#) [604HE223-6B](#) [61CX11-D01](#) [624HE17-RB](#) [M3050A13](#) [64AT22-3D](#) [66AT23-7](#) [6AT3-T](#)
[6HM7-6](#) [MA215HT-96](#) [6PA104](#) [6PA148-E6](#) [701PB580](#) [70B1N056S202W](#) [727033](#) [EXD-AR20](#) [MD3211Q16](#) [76054-00000700-01](#) [76061-](#)
[00000015-15](#) [76061-B00000020-01](#) [76078-00000350-01](#) [76078-B00000400-01](#) [76580-00000130-01](#) [76584-M00000100-24](#) [F78EA502](#)
[F78SA102-B1](#) [77028-00001500-01](#) [78148-B00001000-01](#) [78408-00000100-01](#)