


## General Purpose Alternate and Momentary Pushbutton Switches — Ac/Dc Rated

### MOMENTARY ACTION TYPES

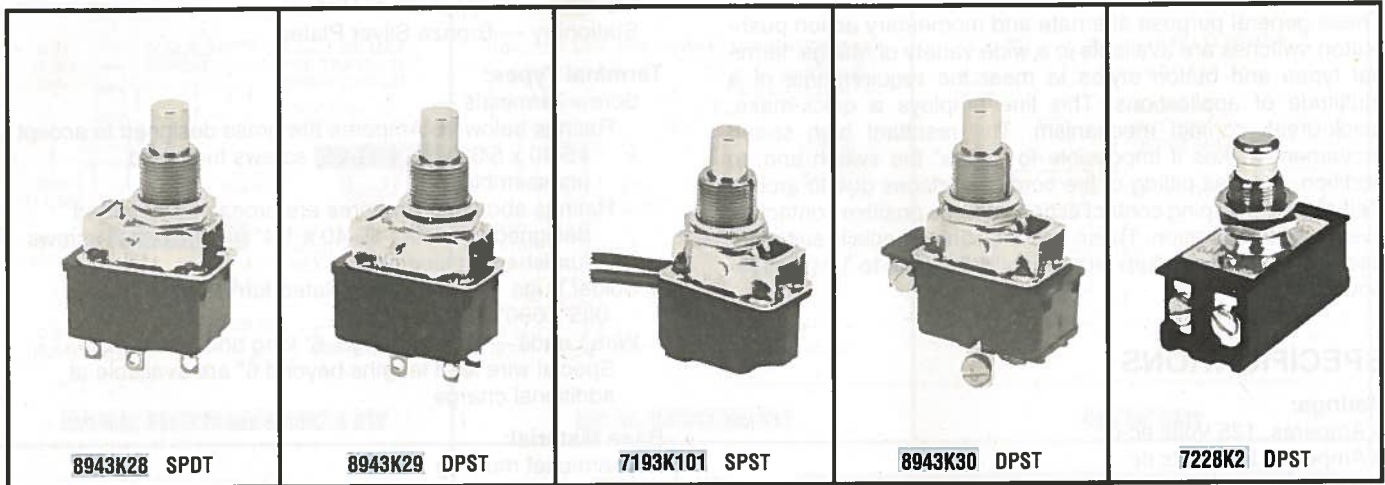

**SELECTION TABLE** — Alternate action ac/dc Pushbutton Switches  
(**Bold Face Type** indicates items normally in Distributor Stock)

Rating	Poles and Throw	Contact Action	Circuit # See page 158	Button Style	Bushing Length		Typical Maximum Operating Force	Catalog Numbers		
					Inches	Millimeters		Solder Lugs	Screw Terminals	Wire Leads
6A, 125V ac-dc ① 3A, 250V dc	1 P.S.T.	Push On/Push Off	A	Standard	0.687	17,45		<b>7206K104</b>	<b>7208K104</b>	<b>7207K104</b>
6A, 125V ac-dc 3A, 250V dc	2 P.D.T.	Push On/Push On	D	Standard	0.562	14,27		<b>8943K32</b>	---	---
16A, 125V ac-dc 8A, 250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.468	11,89	7.4 lbs.		7220K2	
16A, 125V ac-dc 8A, 250V ac-dc 1 Hp, 125-250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.562	14,27	17.52 lbs.	---	7227K2 ②	---
20A, 125V ac-dc 10A, 250V ac-dc 1-1/2 Hp, 125-250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.562	14,27	16.0 lbs.	---	7229K2	---

① Available in ratings up to 8 amp, 125V ac or dc. Refer to the Customer Service Center listed on the back cover of this catalog.

② CSA Certified.

**SELECTION TABLE** — Momentary action ac/dc Pushbutton Switches  
(**Bold Face Type** indicates items normally in Distributor Stock)

Rating	Poles and Throw	Contact Action	Circuit # See page 158	Button Style	Bushing Length		Typical Maximum Operating Force	Catalog Numbers		
					Inches	Millimeters		Solder Lugs	Screw Terminals	Wire Leads
6A, 125V ac-dc 3A, 250V dc	1 P.S.T. 1 P.D.T.	Off — Mom. On On — Mom. On	A B	Standard Standard	0.500 0.500	12,70 12,70	9.0 lbs.	7190K101 <b>8943K28</b>	7196K101 ---	7193K101 ---
12A, 125V ac-dc 6A, 250V ac-dc	1 P.S.T. 1 P.D.T.	Off — Mom. On On — Mom. On	A B	Standard Standard	0.437 0.437	11,10 11,10		---	8980K201 8980K202	---
6A, 125V ac-dc 3A, 250V dc	2 P.S.T. 2 P.D.T.	Off — Mom. On On — Mom. On	C D	Standard Standard	0.500 0.500	12,70 12,70		<b>8943K29</b> 7199K102	8943K30 7199K101	---
16A, 125V ac-dc 8A, 250V ac-dc 3/4 Hp, 125-250V ac-dc	2 P.S.T. 2 P.S.T.	Off — Mom. On On — Mom. Off	C	Standard Standard	0.437 0.437	11,10 11,10	19.0 lbs. 19.0 lbs.	---	7226K2 ② 7226K3 ②	---
20A, 125V ac-dc 10A, 250V ac-dc 1-1/2 Hp, 125-250V ac-dc	2 P.S.T. 2 P.S.T.	Off — Mom. On On — Mom. Off	C	Standard Standard	0.437 0.437	11,10 11,10	20.0 lbs. 20.0 lbs.	---	7228K2 ② 7228K3 ②	---

② CSA Certified.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [eaton](#) manufacturer:*

Other Similar products are found below :

[BK-MDL-3-R](#) [BK1-S506-500-R](#) [BK1-S506-6-3-R](#) [BK1-S506-2-R](#) [MPI4040R4-1R5-R](#) [TDC600-10A](#) [89096-015](#) [8946K153](#) [8961K155](#)  
[M22-D-R-GB0/K11](#) [M22-L-R/R](#) [M22S-ST-GB12](#) [630NHG3B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#)  
[6HD36](#) [714125](#) [MBO-2](#) [ESR5-NO-41-24VAC-DC](#) [7314K36](#) [7321K2](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#)  
[F03A250V12A](#) [F03B125V4A](#) [MCR-4](#) [MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#) [F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [7634K36](#)  
[MDQ-3/16](#) [MDQ-7/10](#) [MDQ-V-1/10](#) [MDQ-V-1-1/4](#) [MDQ-V-1/16](#) [MDQ-V-1/2](#) [MDQ-V-1/4](#) [MDQ-V-3/16](#) [MDQ-V-3/8](#) [MDQ-V-6/10](#)