

Commercial Products

# Quick-Lok Pro Connectors


For the quickest, easiest, secure  
way to terminate AC/MC cable to a  
box or enclosure



**Crouse-Hinds**  
by **EAT•N**

# Quick-Lok™ Pro Connectors...

provides significant labor savings when installing metal clad, MCI-A (such as Southwire's MCAP™) or armored cable to a steel box or enclosure. No tools are needed for installation. Simply insert cable or conduit into the connector and install into knockout. The Quick-Lok Pro family of connectors are removable.

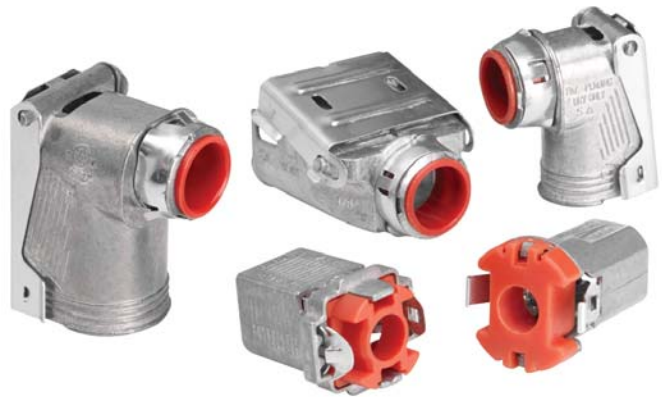

## Applications:

- Quick-Lok Pro Connectors are used to connect armored cable, metal clad cable, MCI-A cable or flexible metallic conduit to a box or enclosure for dry location applications
- Fits ½" knockout

**Single Connector** - For installation of one cable into a box or enclosure

**Duplex Connector** - Allows for installation of two cables in a single KO, into box or enclosure

**90° Connector** - For installation of 90° bend in cable

**Old Work Connector** - For installing and terminating cable after an old work box has been installed

## Features:

- Easy tool free installation (the single and old work connector can also be removed without tools)
- Integral insulated throat bushing provides protection for wire insulation
- Reusable
- Wide range of styles and configurations to meet customer requirements and preferences
- Single unit construction eliminates loose component parts
- Duplex and 90° connector cover opens wide for easy access and wiring
- For use in dry locations/concrete tight when taped

## Certifications & Compliances:

- cULus
- UL File No. E-19188
- Concrete tight when taped

## Standard Materials:








- Body - Zinc Die Cast
- Cover - Zinc Plated Steel
- Insulator - Non-metallic



Now available in bulk packaging!

- Perfect for high volume customers
- Cuts down on packaging waste
- Ideal for contractors with pre-fab shops
- Bulk packaging cost savings
- Available in 38MCQBulk and 38MCQDBulk only



## Ordering Information:

Cat. #	Description	Cable Size: AL and Steel AC	Cable Size: AL and Steel MC/MCI-A/ HCF	Cable Size: AL and Steel RWFMC	Cable Diameter Range	Outlet Box KO Size	Unit Qty.	Wt. Lbs. Per 100
 <b>38MCQ</b>	3/8" Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/3	3/8"	0.395" – 0.638"	1/2"	50	6
 <b>38MCQBULK</b>	3/8" Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/3	3/8"	0.395" – 0.638"	1/2"	500	6
 <b>38MCQD†</b>	3/8" Duplex Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/3	3/8"	0.460" – 0.610"	1/2"	25	11.3
 <b>38MCQDBULK</b>	3/8" Duplex Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/3	3/8"	0.460" – 0.610"	1/2"	250	11.3
 <b>38MCQ90*</b>	3/8" 90° Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/4	3/8"	0.469" – 0.610"	1/2"	25	7.5
 <b>50MCQ90*</b>	1/2" 90° Quick-Lok Pro Connector	8/2 to 8/3	8/2 to 8/3	1/2"	0.670" – 0.785"	1/2"	25	11.3
 <b>38MCQOW</b>	3/8" Old Work Quick-Lok Pro Connector	14/2 to 10/3	14/2 to 10/3	-	0.395" – 0.638"	1/2"	50	6

\*Not approved for use with MCI-A cable  
†Not rated for use with steel MCI-A cable


## Single Connector Installation:

- 1 Insert cable into Connector.
- 2 Snap connector into box.

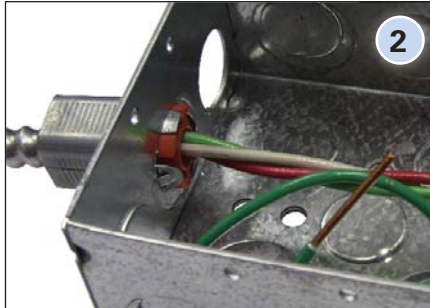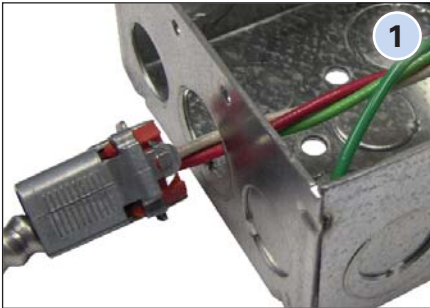

## Duplex Connector Installation:

- 1 Insert cables into the 38MCQD duplex connector.
- 2 Snap connector into box.
- 3 Close the steel cover to lock the cables securely into place.

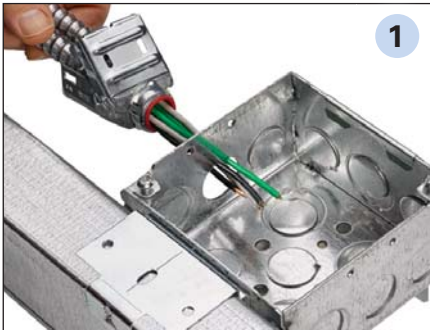



Commercial Products delivers quality, reliability, labor savings and lower installed cost, all from a single dependable source.

See the complete offering of Commercial Products at [www.crouse-hinds.com](http://www.crouse-hinds.com).

**U.S. (Global Headquarters):  
Eaton's Crouse-Hinds Business**

1201 Wolf Street  
Syracuse, NY 13208  
(866) 764-5454  
FAX: (315) 477-5179  
FAX Orders Only:  
(866) 653-0640

[crouse.customerctr@cooperindustries.com](mailto:crouse.customerctr@cooperindustries.com)

**For more information:**

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

**Canada:  
Cooper Crouse-Hinds Canada**

Toll Free: 800-265-0502  
FAX: (800) 263-9504  
FAX Orders only: (866) 653-0645

**Mexico/Latin America/Caribbean:  
Cooper Crouse-Hinds, S.A. de C.V.**

52-555-804-4000  
FAX: 52-555-804-4020  
[mxmercadotecnia@cooperindustries.com](mailto:mxmercadotecnia@cooperindustries.com)

**Europe (Germany):  
Cooper Crouse-Hinds GmbH**

49 (0) 6271 806-500  
49 (0) 6271 806-476  
[sales.CCH.de@cooperindustries.com](mailto:sales.CCH.de@cooperindustries.com)

**Middle East (Dubai):  
Cooper Crouse-Hinds LLC**

971 4 4272500  
FAX: 971 4 4298521  
[sales.CCH.me@cooperindustries.com](mailto:sales.CCH.me@cooperindustries.com)

**Singapore:  
Cooper Crouse-Hinds Pte. Ltd.**

65-6645-9888  
FAX: 65-6297-4819  
[chsi-sales@cooperindustries.com](mailto:chsi-sales@cooperindustries.com)

**China:  
Cooper Crouse-Hinds Pte. Ltd.**

86-21-2899-3600  
FAX: 86-21-2899-4055  
[cchsales@cooperindustries.com](mailto:cchsales@cooperindustries.com)

**Korea:  
Cooper Crouse-Hinds Korea**

82-2-3484-6783  
82-2-3484-6778  
[CCHK-sales@cooperindustries.com](mailto:CCHK-sales@cooperindustries.com)

**Australia:  
Cooper Electrical Australia**

61-2-8787-2777  
FAX: 61-2-9609-2342  
[CEASales@cooperindustries.com](mailto:CEASales@cooperindustries.com)

**India:  
Cooper India Pvt. Ltd.**

91-124-4683888  
FAX: 91-124-4683899  
[cchindia@cooperindustries.com](mailto:cchindia@cooperindustries.com)

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[Eaton.com](http://Eaton.com)

© 2014 Eaton Corporation  
All Rights Reserved  
Printed in USA  
Form No. 5072-0114  
January 2014

**Eaton's Crouse-Hinds Business**  
1201 Wolf Street  
Syracuse, NY 13208  
(866) 764-5454  
[crouse.customerctr@cooperindustries.com](mailto:crouse.customerctr@cooperindustries.com)

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

**Crouse-Hinds**  
by **EATON**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [crouse-hinds](#) manufacturer:*

Other Similar products are found below :

[RE21](#) [14W48](#) [E1016-1612S](#) [15W47](#) [EMP:0205057-J10](#) [NOR-000-002-220-232](#) [RPE417-116](#) [A100601-24](#) [LT20090](#) [AP100-CON-KIT](#)  
[GLL1](#) [CGB5913](#) [CGB6920](#) [CGD196](#) [CGD197](#) [CGD292](#) [CGD297](#) [LT7590](#) [TMCX6206](#) [5000115-189B](#) [RPE421-121](#) [51F2F-D0](#) [EFS2192](#)  
[CGE395](#) [CGD293](#) [CGB6917](#) [CGB5915](#) [CGB4911](#) [CG10090](#) [1050](#) [W2H840](#) [E1016-1600S](#) [NJBW050905TC](#) [PVM25L2B/UNV1](#)  
[PVM11LR3B2/UNV1](#) [E1016-1687S](#) [E1016SC-36](#) [E1016-8394](#) [CGD4911](#) [AP20458](#) [GH420P5W](#) [DEV12-S769](#) [UNY805](#) [EBM:0206695](#)  
[CH360RA6W](#) [ZD13701](#) [EDS11273](#) [STBS1151509](#) [EMP049](#) [ATP375](#) [EDSC215](#)