

30 Watt POE+ Power Transformers




EFD20 Package for Akros Silicon AS1135



Product Features:

- Designed for PoE+ isolated flyback DC/DC converter applications using the Akros Silicon AS1135
- Utilizes industry standard style footprint
- UL/EN60950 recognized
- Fully compliant to IEEE802.3at standard
- Isolation Voltage (PRI-SEC) 1,500Vrms
- Operating Temperature Range -40 to +85C


Part Number	Turns Ratio N1:N2:N3:N4:N5:N6	DCR (mΩ max)	PRI/OCL (μH ±10%)	PRI LL (μH ±10%)	Output Voltage	Circuit
TGSP-P026EFD20LF	1:1:0.25:0.2:0.2:0.25	50,300,10,300	40	0.8	5V	A
TGSP-P027EFD20LF	1:1:0.25:0.125:0.125:0.25	60,350,8,350	57	1.2	3.3V	A
TGSP-P028EFD20LF	1:1:0.167:0.333:0.333	150,300,50	112	1.5	12V	B

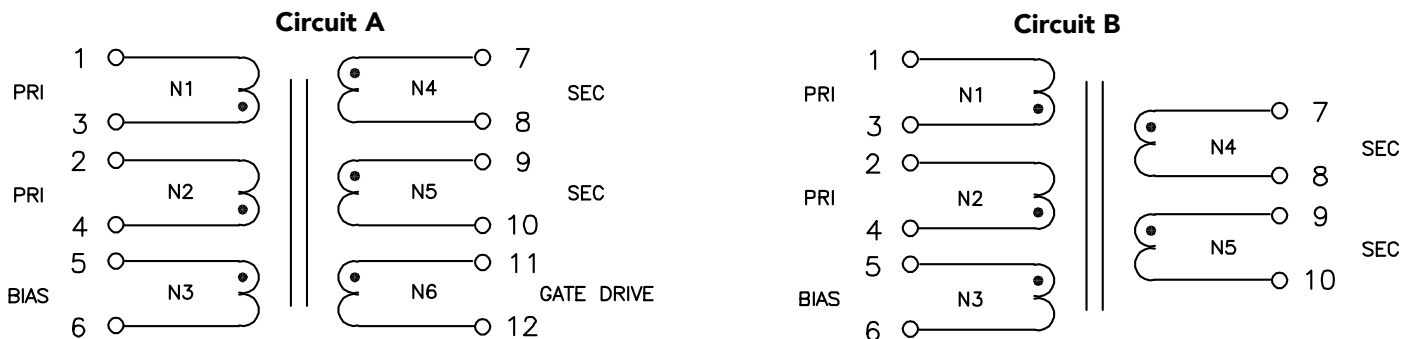

Primary windings (N1 and N2) and Secondary windings (N4 and N5) must be connected in parallel on the customer PCB.


30 Watt POE+ Power Transformers

EFD20 Package

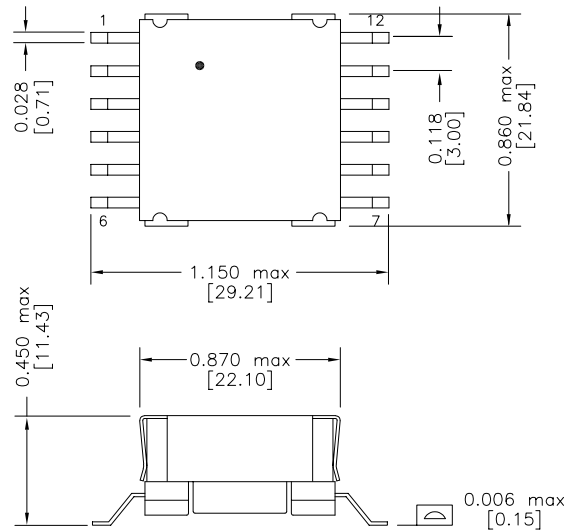

Dimensions: Inch [mm]

Tolerances: 0.006 Inch if not specified

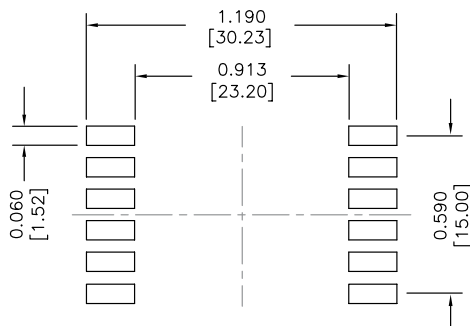

Recommended
Solder Pad Layout

HALO
ELECTRONICS, INC.

2880 Lakeside Drive #116
Santa Clara, CA 95054
(650) 903-3800

www.haloelectronics.com

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

© Copyright 2012-2017 HALO Electronics, Inc. All rights reserved.

Revised 03/2017 Download the latest version at www.haloelectronics.com/pdf/30watt-akros.pdf

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [HALO](#) manufacturer:

Other Similar products are found below :

[1-1672275-3](#) [A41-43-20A20](#) [DST5-120B39](#) [14A-56-36B42](#) [EN2997SE61808F8](#) [9-1611461-2](#) [29768](#) [1654308-1](#) [170R](#) [ST2-12B42](#) [ST3-12B5](#) [ST6118T-R](#) [PE-68421NL](#) [PL2.5-12-130B-C](#) [PoE4W3x5.0-R](#) [POE7W3X3.3-R](#) [4000-20C02K999](#) [4001-09W15AE777](#) [48RO-5000G-SIL](#) [TRA-0130-R](#) [XON7-15/2](#) [47045010](#) [1-1611760-0](#) [EN2997SE61808F9](#) [OPT110F-EAS00004AU](#) [XON25-9/24](#) [XON01349](#) [XON01200](#) [XDCA001/INER01](#) [PE-68414NL](#) [F-91X](#) [F-29U](#) [DST4-16B10](#) [P-8577](#) [T50-24M3](#) [1-1672277-2](#) [1-1672277-0](#) [1-1672275-5](#) [1-1672275-0](#) [PC-24-180B18](#) [750315837](#) [750315125](#) [POE13W2VERS-R](#) [PA2380NL](#) [14A-10-12B9](#) [PE-68411NL](#) [750315126](#) [DPC-28-160B50](#) [PA0803NL](#) [750315836](#)