

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0039000047](#)
Status: **Active**
Overview: Mini-Fit Jr.™ Power Connectors
Description: Mini-Fit® Female Crimp Terminal, Tin (Sn) over Copper (Cu) Plated Brass, 22-28 AWG, Bag

Documents:

Drawing (PDF)	Product Specification PS-52034-004 (PDF)
Product Specification PS-51010-005 (PDF)	Product Specification PS-5556-001 (PDF)
Product Specification PS-51010-006 (PDF)	Product Specification PS-5556-002 (PDF)
Product Specification PS-51096-001 (PDF)	Test Summary TS-5556-002 (PDF)
Product Specification PS-52034-003 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Terminals
Series	5556
Application	Power
Crimp Quality Equipment	Yes
Overview	Mini-Fit Jr.™ Power Connectors
Product Name	Mini-Fit®
UPC	800753727212

Physical

Durability (mating cycles max)	30
Gender	Female
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.123/g
Packaging Type	Bag
Plating min - Mating	0.889µm
Plating min - Termination	0.889µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	0.90-1.80mm
Wire Size AWG	22, 24, 26, 28
Wire Size mm²	N/A

Electrical

Current - Maximum per Contact	9.0A
Voltage - Maximum	600V

Solder Process Data


Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Old Part Number	5556T2L
-----------------	---------

Reference - Drawing Numbers

Product Specification	PS-51010-005, PS-51010-006, PS-51096-001, PS-52034-003, PS-52034-004, PS-5556-001, PS-5556-002, RPS-30067-001, RPS-30067-002, RPS-5557-031
Sales Drawing	SD-5556****
Test Summary	TS-5556-002

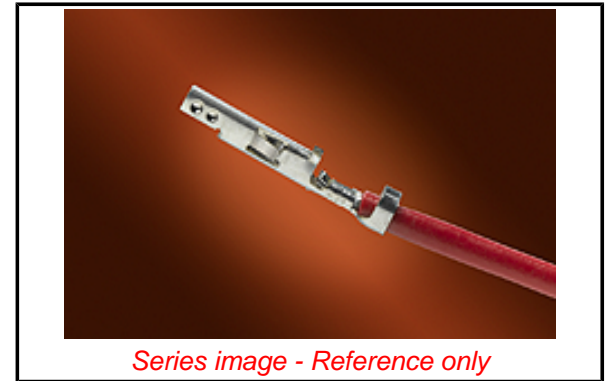

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contains SVHC(2015 June 15): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
ELV

Green Image
Not Relevant

Search Parts in this Series

[5556](#) Series

Mates With

[5558](#) Mini-Fit® Crimp Male Terminals, Mini-Fit Jr.™ Header, Dual Row, [5566](#) , [5569](#)

Use With

[5557](#) Mini-Fit Jr.™ Receptacle Housing, [30067](#) Mini-Fit® TPA, [42474](#) Mini-Fit® BMI Panel Mount, [5559](#) Mini-Fit Jr.™ Plug Housing, Dual Row

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Extraction Tool

[0011030044](#)

Hand Crimp Tool for 0638191000
Crimp Terminals

Japan

Description	Product #
--------------------	------------------

Hand Extraction Tool	<u>0570316000</u>
----------------------	-------------------

Handtool - Straight	<u>0570385300</u>
---------------------	-------------------

Action

Hand Crimp Tool	<u>0570645000</u>
-----------------	-------------------

This document was generated on 08/26/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#)