

Watch Crystals 32.7680kHz

ISSUE 9; 12 JUNE 1998

Delivery Options

- Please refer to stock list or consult sales office

Holder Style

- Watch crystals are press sealed. Two sizes are available: 3.0 x 8.2mm & 2.0 x 6.2mm

General Specifications

- Load Capacitance: 6pF & 12.5pF
- Drive Level: 1.0μW max.
- Static Capacitance (C₀): 1.6pF typical

Standard Frequency Tolerance

- ±20ppm

Operating Temperature Ranges

- 0 to 50°C -20 to 70°C
-10 to 60°C -30 to 80°C

Storage Temperature Range

- -55 to 125°C


Marking

- No marking or frequency only


Minimum Order Information Required

- Frequency + Holder + Frequency Tolerance @ 25°C
+ Operating Temperature Range + Circuit Condition

Outline in mm

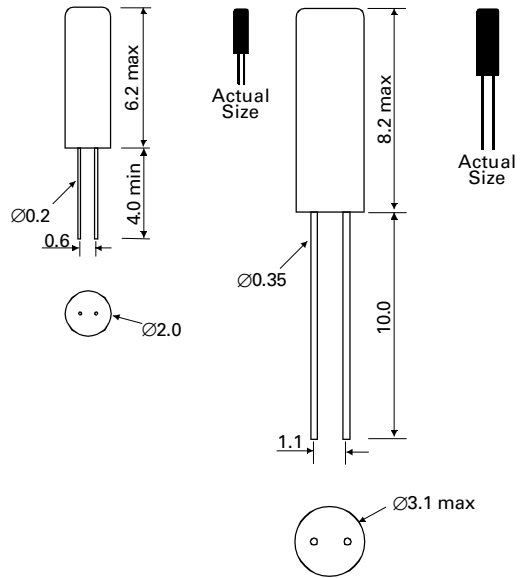

Frequency Temperature Curve

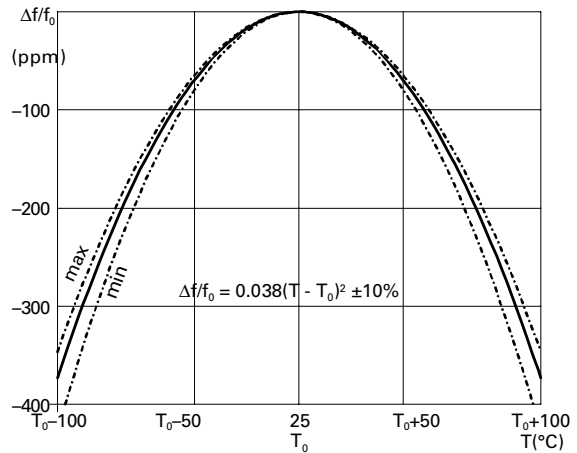

Electrical Specification – maximum limiting values

Frequency Range	Frequency Tolerance @ 25°C ±2°C	Operating Temperature Range	Frequency Stability Available Over Operating Temperature		ESR Max	Vibration Mode
			Minimum	Maximum		
32.7680kHz	±10ppm to ±100ppm	0 to 50°C	-25ppm	-100ppm	50kΩ	Fundamental
		-10 to 60°C	-50ppm	-100ppm		
		-20 to 70°C	-85ppm	-100ppm		
		-30 to 80°C	-150ppm	-300ppm		

LEADED QUARTZ CRYSTALS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [IQD](#) manufacturer:

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)