

R-Series - UL1077 Supplementary Protector - 2 pole B-Trip



E301611




Two Pole

Standard Pack: 12


Weight:

0.5A - 63A: 1.6kg (3.54 lb.)


| Rated Current | Type/ Cat. No. |
|---------------|-------------------|
| 0.5A | 2BU05R |
| 1.0A | 2BU1R |
| 2.0A | 2BU2R |
| 3.0A | 2BU3R |
| 4.0A | 2BU4R |
| 5.0A | 2BU5R |
| 6.0A | 2BU6R |
| 8.0A | 2BU8R |
| 10A | 2BU10R |
| 12A | 2BU12R |
| 13A | 2BU13R |
| 15A | 2BU15R |
| 16A | 2BU16R |
| 20A | 2BU20R |
| 25A | 2BU25R |
| 30A | 2BU30R |
| 32A | 2BU32R |
| 40A | 2BU40R |
| 50A | 2BU50R |
| 60A | 2BU60R |
| 63A | 2BU63R |

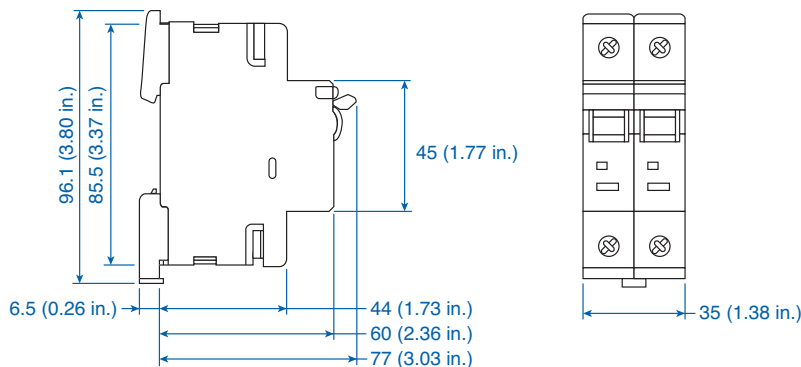

B, C and D Trip, Less than 10A

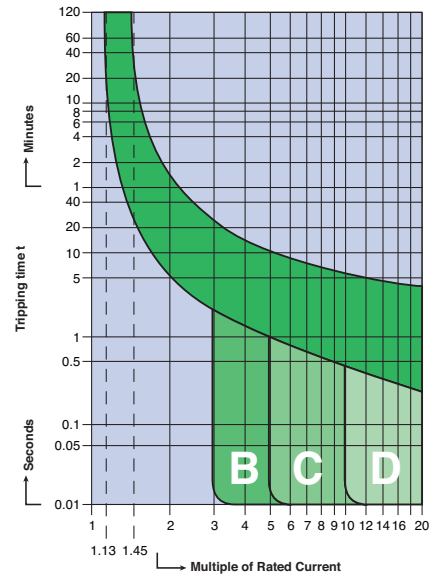

B, C and D Trip, 10A and higher

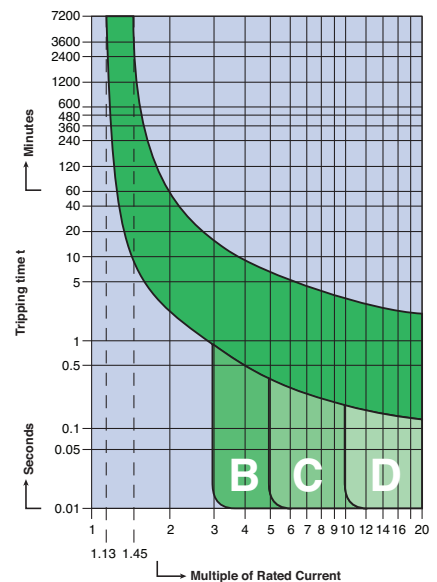

SHORT CIRCUIT WITHSTAND RATINGS FOR R-SERIES SUPPLEMENTARY PROTECTOR

| Trip Curve | Amp Range | Backup Protection | |
|------------|-----------|-----------------------------------|--------------------------------|
| | | UL-Listed Class J Fuse up to 10kA | No Backup Fuse Required up to: |
| All | 0.5 - 6A | 4xRC* | 10kA |
| All | 8 - 63A | 4xRC* | 5kA |

*up to nearest rated current

| | |
|--|--|
| Voltage Rating | 480Y/277VAC |
| Short Circuit Withstand Rating (UL - Ratings) | 0.5-6A (RC): 10kA with no back-up fuse 8-63A (RC): 10kA with UL-listed Class J back-up fuse; 5kA with no back-up fuse |
| Interrupting Capacity (IEC/EN60898/60947-2) | 0.5-63A (RC): 10kA |
| Calibration Temperature | 30°C (86°F) |
| Operating Temperature | -25° to 60°C (-13° to 140°F) |
| Storage Temperature | -25° to 75°C (-13° to 167°F) |
| Terminal Size Acceptability: | |
| Solid Wire | 18 AWG -10 AWG |
| Stranded Wire | 18 AWG -3 AWG (Line/Load reversible) |
| Terminal Torque | 2.8 Nm (25 lb-in.) |
| Terminal Protection Degree | IP20 |
| Vibration Resistance | 3g (18-50Hz) |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Breakers](#) category:

Click to view products by [Altech](#) manufacturer:

Other Similar products are found below :

[M39019/04-249S](#) [M39019/04-313S](#) [M55629/1-001](#) [M55629/1-016](#) [M55629/1-018](#) [M55629/1-021](#) [M55629/1-033](#) [M55629/1-036](#) [M55629/1-046](#) [M55629/1-048](#) [M55629/1-058](#) [M55629/1-060](#) [M55629/1-067](#) [M55629/1-070](#) [M55629/1-079](#) [M55629/1-084](#) [M55629/1-085](#) [M55629/1-101](#) [M55629/1-108](#) [M55629/1-109](#) [M55629/11-102](#) [M55629/1-120](#) [M55629/12-045](#) [M55629/12-046](#) [M55629/1-243](#) [M55629/1-330](#) [M55629/1-331](#) [M55629/1-351](#) [M55629/1-366](#) [M55629/1-387](#) [M55629/1-388](#) [M55629/1-401](#) [M55629/1-430](#) [M55629/1-450](#) [M55629/1-453](#) [M55629/2-022](#) [M55629/2-037](#) [M55629/2-082](#) [M55629/2-099](#) [M55629/2-101](#) [M55629/2-102](#) [M55629/2-115](#) [M55629/2-116](#) [M55629/2-183](#) [M55629/21-HM-HM](#) [M55629/21-NS-NS](#) [M55629/21-SK-UK](#) [M55629/22-NR-NR-NR](#) [M55629/22-RS-RS-RS](#) [M55629/22-TM-TM-TM](#)