

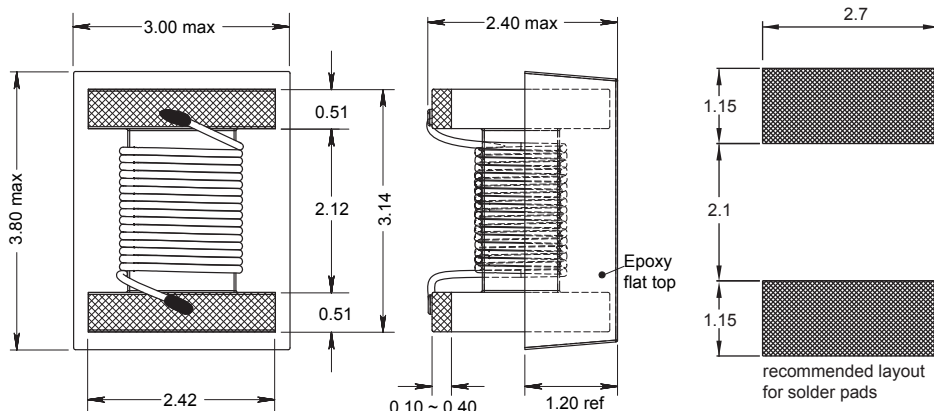


# 1210 FTC

Mini Size  
Transponder Coil



Typical Ls vs Frequency (f)

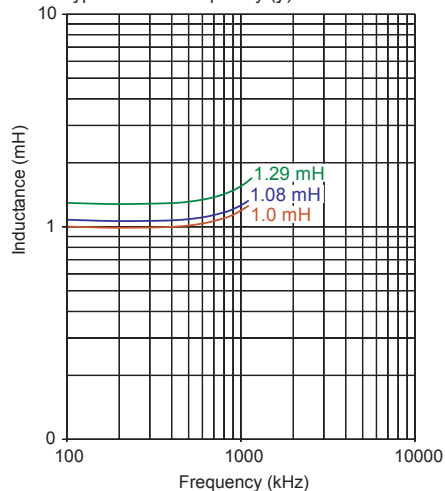

Part No	Inductance L (mH)	f <sub>L</sub> (kHz)	Tol ± (%)	Q min	f <sub>Q</sub> (kHz)	SRF typ (MHz)	DCR max (Ω)	Sensitivity mV/μT
1210FTC-102K-YY	1.00	125	10	8	125	1.7	32.0	10
1210FTC-112K-YY	1.08	125	10	8	125	1.7	42.0	12
1210FTC-132K-YY	1.29	125	10	8	125	1.7	46.5	12


Core Material : Ferrite

Revision date : 10 May 2017

SPQ : Taped / Reel 800 [-01]  
3000 [-04]

Remarks: - For not listed inductance values please check availability with us.  
- 5% tolerance available on request.

Typical Q vs Frequency (f)

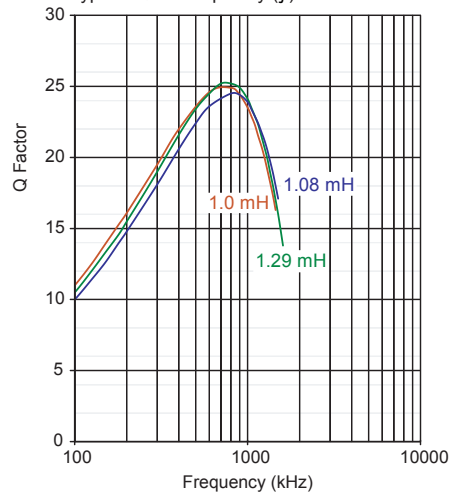

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ferrite Beads](#) category:*

*Click to view products by [Fastron](#) manufacturer:*

Other Similar products are found below :

[2943778301](#) [BMB1J0120BN3JIT](#) [82350120560](#) [0261014605](#) [2643066902](#) [3061000011](#) [2673045901](#) [2643083601](#) [2643074901](#) [4361142521](#)  
[4078078621](#) [4078044821](#) [4078033621](#) [CZB2BFTTE121P](#) [BMB2A0120AN2](#) [BMB1J0200BN3JIT](#) [EMI0805R-220](#) [74279250](#) [7427924](#)  
[CZB1JGTTD202P](#) [MAF0603GWY551AT000](#) [MAF1005GWZ102AT000](#) [BLM18HE152SH1D](#) [2944778302](#) [BLM02PX600SN1D](#) [SMB2.5-1](#)  
[EMI1206R-600](#) [BLM02KX180SN1D](#) [BLM02BC100SN1D](#) [BLM02KX100SN1D](#) [BLM02BB101SN1D](#) [BLM02BC220SN1D](#)  
[BLE32PN260SH1L](#) [BLE32PN260SN1L](#) [BLE32PN260SZ1L](#) [74275013](#) [7427503](#) [BLM18HE601SH1D](#) [BLM15BD152SN1D](#)  
[BLM15BD152SZ1D](#) [BLE18PS080SZ1D](#) [BLM21PG221BH1D](#) [WLBD1005HCU330TL](#) [BLM21AG471BH1D](#) [BLE18PS080BH1D](#)  
[BLM21AG331BH1D](#) [BLM21PG300BH1D](#) [BLM21PG600BH1D](#) [BLM03HB401SZ1D](#) [BLM03HB401SN1D](#)