


#12-32 UNEF-2A Pi, & C Filters

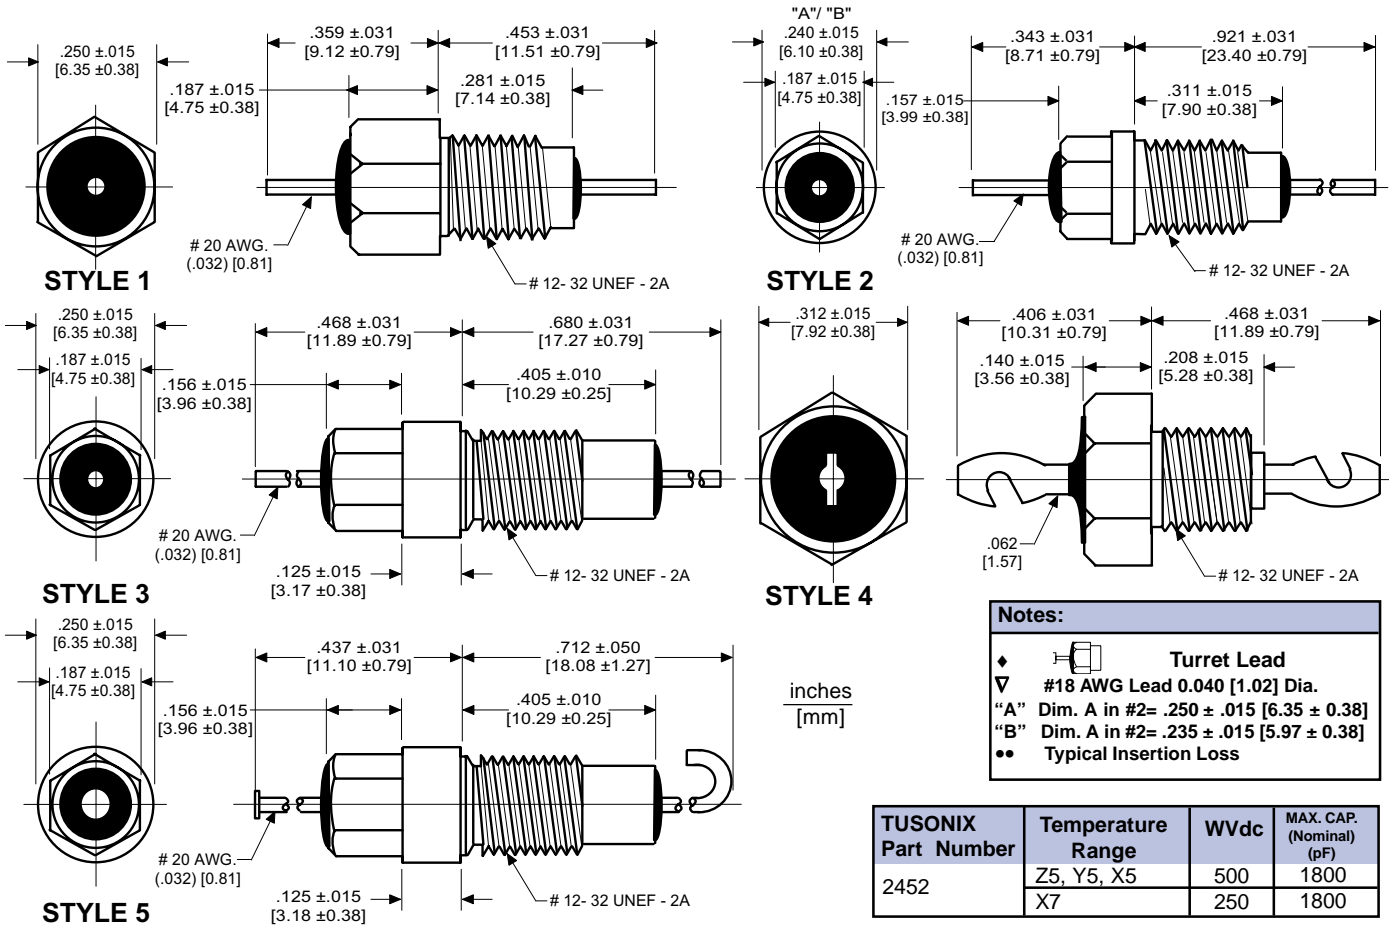

Please see Temperature Characteristics and EIA Codes on page 25.

| TUSONIX Part Number | MIL-PRF-15733 Number | Style | Notes | Circuit | Working Voltage (dc) | | Capacitance (pF) | Capacitance Tolerance | Current (A) | Minimum No-Load Insertion Loss (dB) at 25°C per MIL-Std-220 | | | |
|-------------------------|----------------------|-------|-------|---------|----------------------|----------------|------------------|-----------------------|-------------|---|--------|------|-------|
| | | | | | 85°C | 125°C | | | | 10MHz | 100MHz | 1GHz | 10GHz |
| Pi Configuration | | | | | | | | | | | | | |
| 4207-003 | -- | 3 | -- | Pi | 100 | 70 | 12,000 | GMV | 10 | 45 | 70 | 70 | 70 |
| 4253-002 | -- | 3 | -- | Pi | 100 | 70 | 50,000 | GMV | 10 | 60 | 75 | 75 | 75 |
| 4202-050 | -- | 1 | -- | Pi | 200 | 100 | 5000 | GMV | 10 | 20 | 65 | 70 | 70 |
| 4202-051 | -- | 1 | ◆ | Pi | 200 | 100 | 5000 | GMV | 10 | 20 | 65 | 70 | 70 |
| 4203-050 | -- | 2 | -- | Pi | 200 | 100 | 5000 | GMV | 10 | 20 | 65 | 70 | 70 |
| 4203-051 | -- | 2 | ◆ | Pi | 200 | 100 | 5000 | GMV | 10 | 20 | 65 | 70 | 70 |
| 4203-053 | -- | 2 | ◆A | Pi | 200 | 100 | 5000 | GMV | 10 | 20 | 65 | 70 | 70 |
| 4203-551 | /61-0011 | 2 | ◆B | Pi | -- | 100dc 70ac | 5000 | GMV | 10ac | -- | 65 | 70 | 70 |
| 4203-553 | /61-0010 | 2 | ◆A | Pi | -- | 100dc 70ac | 5000 | GMV | 10ac | -- | 65 | 70 | 70 |
| 4253-001 | -- | 2 | ◆ | Pi | -- | 100 | 25,000 | GMV | 10 | 30 | 65 | 70 | 70 |
| 4253-000 | -- | 3 | -- | Pi | -- | 140 | 22,000 | GMV | 10 | 45 | 75 | 75 | 75 |
| 4202-000 | -- | 1 | -- | Pi | 350 | 200 | 1500 | GMV | 10 | 5 | 45 | 70 | 70 |
| 4203-000 | -- | 2 | -- | Pi | 350 | 200 | 1500 | GMV | 10 | 5 | 45 | 70 | 70 |
| 4202-001 | -- | 1 | ◆ | Pi | 350 | 200 | 1500 | GMV | 10 | 5 | 45 | 70 | 70 |
| 4202-501 | /61-0002 | 1 | ◆ | Pi | -- | 200dc 140ac | 1500 | GMV | 10ac | -- | 45 | 70 | 70 |
| 4203-003 | -- | 2 | ◆A | Pi | 350 | 200 | 1500 | GMV | 10 | 5 | 45 | 70 | 70 |
| 4203-501 | /61-0006 | 2 | ◆B | Pi | -- | 200dc 140ac | 1500 | GMV | 10ac | -- | 45 | 70 | 70 |
| 4203-552 | /61-0007 | 2 | ◆A | Pi | -- | 100dc 70ac | 5000 | GMV | 10ac | -- | 65 | 70 | 70 |
| 4207-000 | -- | 5 | -- | Pi | 500 | 300 | 1200 | GMV | 10 | 5 | 43 | 55 | 55 |
| 4207-001 | -- | 5 | -- | Pi | 500 | 300 | 4000 | GMV | 10 | 15 | 55 | 60 | 60 |
| 4202-004 | -- | 1 | ▽ | Pi | 500 | 350 | 2500 | GMV | 15 | 5 | 50 | 70 | 70 |
| C Configuration | | | | | | | | | | | | | |
| 2452-000-X7R0-101M | -- | 4 | ●● | C | 500 | 250 | 100 | ±20% | 20 | -- | 3 | 20 | 28 |
| 2452-000-X7R0-471M | -- | 4 | ●● | C | 500 | 250 | 470 | ±20% | 20 | -- | 12 | 27 | 27 |
| 2452-000-X5U0-102P | -- | 4 | ●● | C | 500 | 250 | 1000 | +100-0% | 20 | 3 | 20 | 35 | 40 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cts manufacturer](#):

Other Similar products are found below :

[744C083333JP](#) [296UD504B1N](#) [262XR102B](#) [744C083102JP](#) [CB3LV-3C-32M7680](#) [744C083222JP](#) [743C083103JP](#) [770101223](#)
[026TB32R253B1A1](#) [766163511GP](#) [ATS040SM-1](#) [MXO45HST-3C-16M0000](#) [ATS061C](#) [743C083104JP](#) [744C083472JP](#) [77083103P](#) [218-](#)
[10LPSTRF](#) [O7050147456MFDA4SC](#) [402WF20012IMR](#) [KFF6516A](#) [194-8MST](#) [742C083330JPTR](#) [750-101-R120](#) [TFE322T32K7680R](#)
[TX0506-1B](#) [766143221GP](#) [77061333P](#) [403C35D12M00000](#) [219-10LPSTR](#) [CTS-1621](#) [284TBCF502A26A1](#) [766163560GP](#) [CB3-3I-](#)
[20M0000](#) [4400-032](#) [ATS12ASM-1](#) [201XR104B](#) [770103101P](#) [CA25C5003HLT](#) [209-2MSF](#) [6740-2015](#) [CB3-3C-1M5440](#) [206-6RAST](#)
[T8031-5V](#) [767163104D](#) [PB1-36ND](#) [ATS049BSM-1E](#) [ATS16ASM-1E](#) [4400-095LF](#) [209-6LPST](#) [MP100B](#)