



# CFM300M SERIES

## 300 WATT AC-DC POWER SUPPLY WITH PFC



### Features

- \* Universal Input Range 90 ~ 264Vac
- \* Active PFC Meets EN61000-3-2
- \* High Efficiency up to 94%
- \* High Power Density up to 18W/Inch<sup>3</sup>
- \* Meets EN55011 Class B
- \* Meets 2MOPP
- \* Over Temperature Protection
- \* Continuous Short Circuit Protection
- \* Remote Voltage Sense
- \* PS On/Off Remote Control
- \* Power Good & Power Fail Signal
- \* +5V Stand-by Output Power
- \* 12V Fan Output
- \* No Load Power Consumption < 0.3W<sub>NOTE6</sub>
- \* 3" x 5" Size



Model	Output Voltage	Output Current		Ripple & Noise NOTE 1	Voltage Accuracy NOTE 2	Line Regulation NOTE 3	Voltage ADJ. Range	Load Regulation NOTE 4	% EFF. Typ. NOTE 5
		Rated1	Rated2						
<b>Main Output Voltage</b>									
CFM300M120	+12 V	25A	16.67A	120mV	± 1%	± 0.5%	11.4~12.6	± 1%	92.5%
CFM300M240	+24 V	12.5A	8.34A	150mV	± 1%	± 0.5%	22.8~25.2	± 1%	93.5%
CFM300M360	+36 V	8.34A	5.56A	150mV	± 1%	± 0.5%	34.2~37.8	± 1%	93.5%
CFM300M480	+48 V	6.25A	4.17A	150mV	± 1%	± 0.5%	45.6~50.4	± 1%	94.0%
<b>Stand-by Output Voltage</b>									
All	+5V	1A	0.6A	100mV	± 3%	± 1%	--	± 5%	--
<b>Fan Output Voltage</b>									
All	+12V	0.5A		--	--	--	--	--	--

Note:

Rated 1: Forced air convection


Rated 2: Natural convection

For covered versions add "C" to model number or order part no. For example CFM300M120C



# Mechanical Specification

All Dimensions in Inches[mm]  
 Tolerance Inches:x.xxx±0.02  
 Millimeters:x.xx±0.5

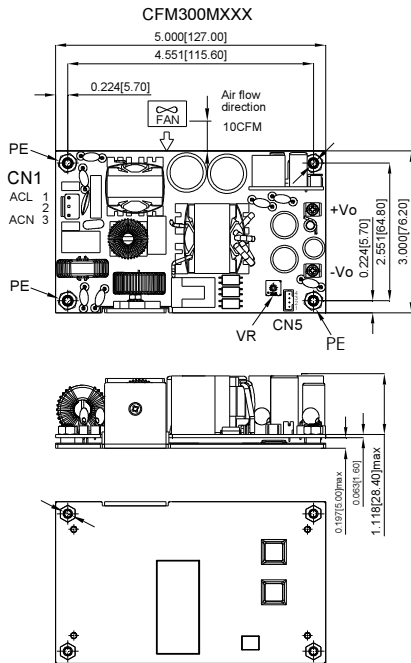

CN1:  
PIN CONNECTION





Pin	Function
1	ACL
2	-
3	ACN

CN4:  
PIN CONNECTION

Pin	Function
1	FAN Output-
2	FAN Output+
3	GND
4	+5VSB
5	GND
6	PS-ON

CN5:  
PIN CONNECTION

Pin	Function
1	GND
2	PG
3	-Sense
4	+Sense

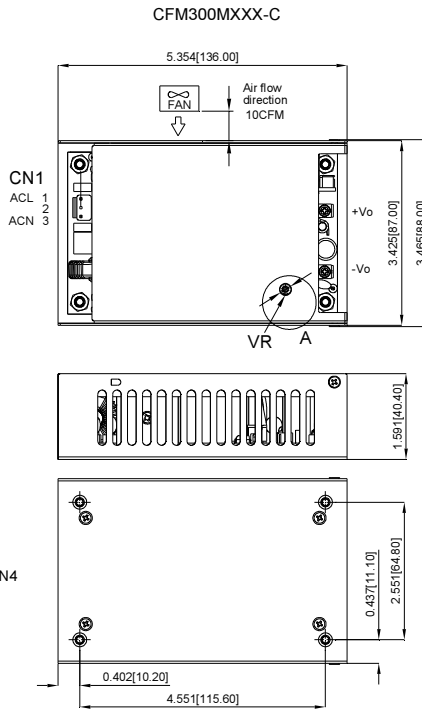

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [Cincon](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)  
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [40370121910](#) [LDIN5075](#) [WRB01X-U](#) [LPX140-C](#) [08-30466-](#)  
[1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#) [LPM000-](#)  
[BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-1219-18S](#) [6504-226-2101](#)  
[CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#) [VI-](#)  
[RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#) [BWB24SX-U](#)