

## YPRH-D SERIES

### ■ Features

- High current Type;
- Ferrite bobbin core and compact size;
- Low core loss for high frequency power application.
- Large terminal surface for good PCB bonding;

### ■ Applications:

- Portable communication equipment;
- Notebook PC,digital camera,LCD television set;
- Power supply for VTR,OA equipment;
- DC/DC converters.

### ■ 产品标识: Product Identification

YPRH	□D□□	—	□□□	□
(1)	(2)		(3)	(4)


(1): 产品系列号;

(2): 产品尺寸;

(3): 电感值;

(4): 感值误差: N=±30%,M=±20%, L=±15%, K=±10%;

### ■ 尺寸(单位: mm)

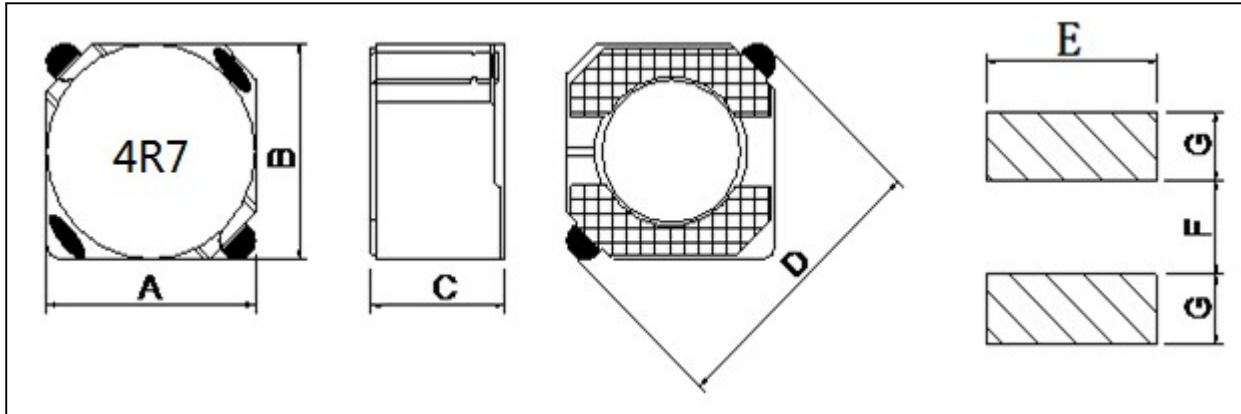

TYPE	A	B	C	D	E	F	G
YPRH3D16	3.8±0.3	3.8±0.3	1.80MAX	4.15MAX	/	/	/
YPRH3D28	3.9±0.3	3.9±0.3	3.20MAX	5.60MAX	4.6REF	1.4REF	1.6REF
YPRH4D28	4.7±0.3	4.7±0.3	3.00MAX	6.90MAX	5.3REF	1.5REF	1.9REF
YPRH5D18	5.7±0.3	5.7±0.3	2.00MAX	8.2MAX	6.3REF	2.0REF	2.15REF
YPRH5D28	5.7±0.3	5.7±0.3	3.00MAX	8.2MAX	6.3REF	2.0REF	2.15REF
YPRH6D18	6.7±0.3	6.7±0.3	2.00MAX	9.5MAX	7.3REF	2.0REF	2.65REF
YPRH6D28	6.7±0.3	6.7±0.3	3.00MAX	9.5MAX	7.3REF	2.0REF	2.65REF
YPRH6D38	6.7±0.3	6.7±0.3	4.00MAX	9.5MAX	7.3REF	2.0REF	2.65REF
YPRH7D15	7.5±0.3	7.5±0.3	1.55MAX	/	/	/	/
YPRH8D25	8.0±0.3	8.0±0.3	2.5MAX	/	/	/	/
YPRH8D28	8.0±0.3	8.0±0.3	3.0MAX	1.2REF	10.1REF	2.8REF	6.1REF
YPRH8D43	8.0±0.3	8.0±0.3	4.5MAX	/	/	/	/
YPRH10D40	10.1±0.3	10.1±0.5	3.8±0.2	1.2±0.15	3.2REF	7.3REF	1.6REF
YPRH10D50	10.1±0.3	10.1±0.5	5.0±0.2	1.2±0.15	3.6REF	7.3REF	1.7REF

**■ YPRH3D16 series**

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH3D16-2R2□	2.20	100KHz	0.084	2.10
YPRH3D16-4R7□	4.70	100KHz	0.112	0.95
YPRH3D16-100□	10.0	100KHz	0.230	0.66
YPRH3D16-220□	22.0	100KHz	0.600	0.40
YPRH3D16-470□	47.0	100KHz	0.930	0.23

**■ YP3D28 series**

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH3D28-100□	10.0	100KHz	0.150	0.80
YPRH3D28-470□	47.0	100KHz	0.550	0.60
YPRH3D28-101□	100	100KHz	1.680	0.18

## ■ YPRH4D28 series

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH4D28-2R2□	2.20	100KHz	0.0505	2.00
YPRH4D28-6R8□	6.80	100KHz	0.092	1.12
YPRH4D28-220□	22.0	100KHz	0.218	0.70
YPRH4D28-330□	33.0	100KHz	0.285	0.56
YPRH4D28-470□	47.0	100KHz	0.440	0.48
YPRH4D28-680□	68.0	100KHz	0.620	0.35
YPRH4D28-121□	120	100KHz	1.550	0.27
YPRH4D28-221□	220	100KHz	2.100	0.20
YPRH4D28-102□	1000	100KHz	5.500	0.10

**YPRH5D18 series**

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH5D18-150□	15.0	100KHz	0.204	1.38
YPRH5D18-330□	33.0	100KHz	0.380	0.90

**■YPRH5D28 series**

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH5D28-4R7□	4.70	100KHz	0.036	2.10
YPRH5D28-100□	10.0	100KHz	0.065	1.30
YPRH5D28-220□	22.0	100KHz	0.112	0.90
YPRH5D28-470□	47.0	100KHz	0.250	0.62
YPRH5D28-680□	68.0	100KHz	0.355	0.52
YPRH5D28-101□	100	100KHz	0.580	0.42

**■ YPRH6D18 series**

Part No.	L(uH)	L Test Freq.	DCR( $\Omega$ )Max	Rated Current (A)
YPRH6D18-6R8□	6.80	100KHz	0.200	2.00























## 产品包装

### TAPING DRAWINGS

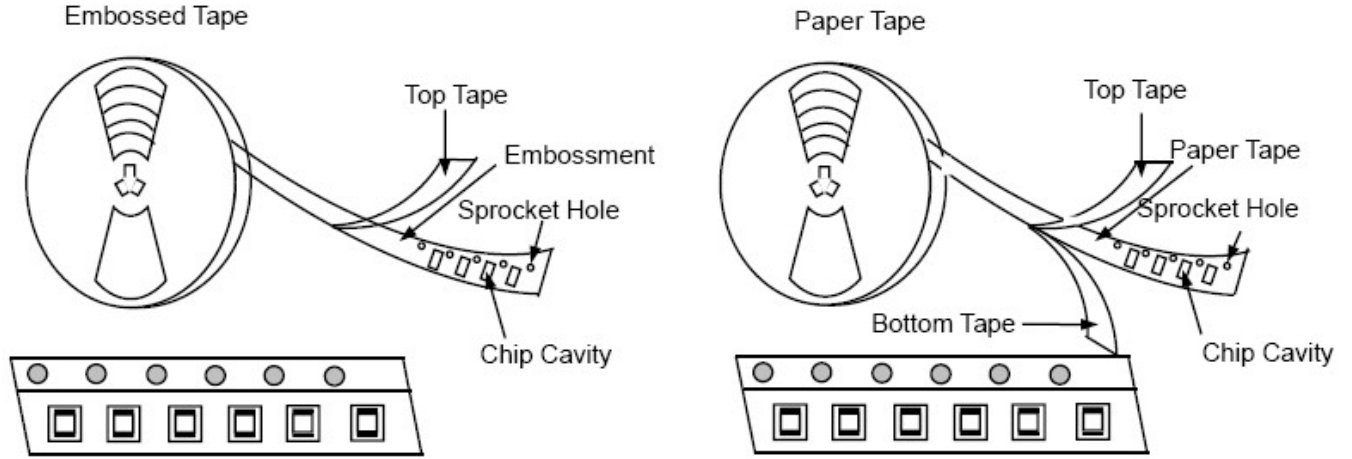

### TAPING DIMENSIONS (UNIT: mm)

#### 1. Embossed Tape (8/12mm Wide Tape)

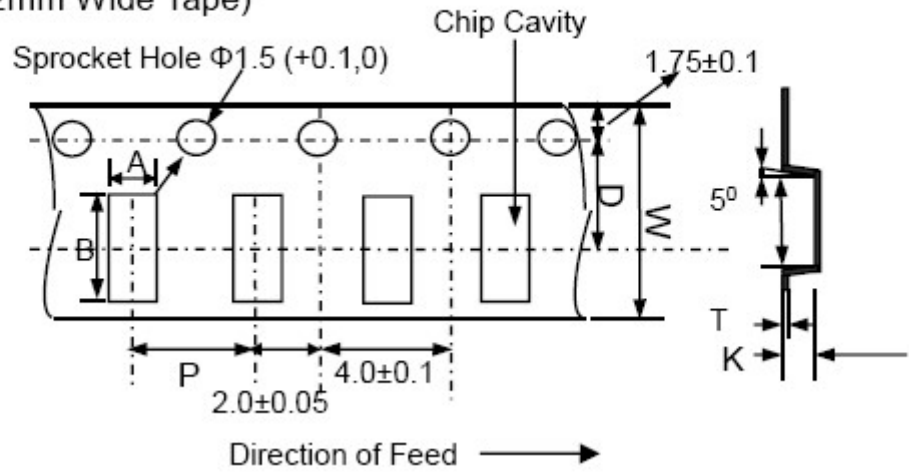

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [YJYCOIN](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)