

YPRH SERIES

■ Features

- High current Type;
- Ferrite bobbin core and compact size;
- Low core loss for high frequency power application.
- Large terminal surface for good PCB bonding;

■ Applications:

- Portable communication equipment;
- Notebook PC,digital camera,LCD television set;
- Power supply for VTR,OA equipment;
- DC/DC converters.

■ 产品标识: Product Identification

YPRH	□□□□	—	□□□	□
(1)	(2)		(3)	(4)


(1): 产品系列号;

(2): 产品尺寸;

(3): 电感值;

(4): 感值误差: N=±30%,M=±20%, L=±15%, K=±10%;

■ 尺寸(单位: mm)

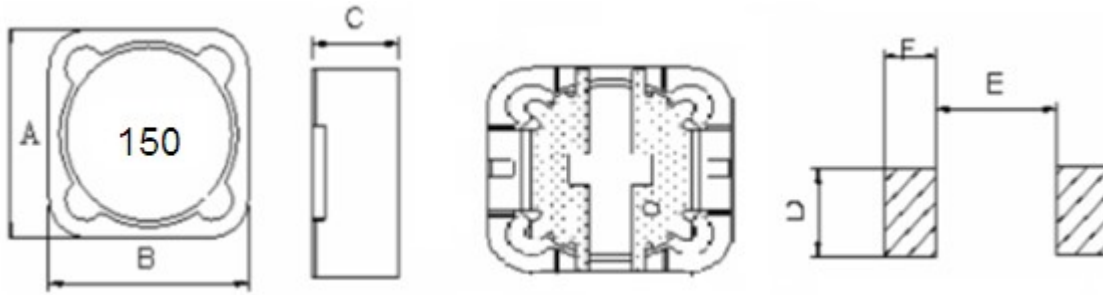

TYPE	A	B	C	D	E	F	G
YPRH07032	7.6MAX	7.6MAX	3.9MAX	/	/	/	/
YPRH07045	7.6MAX	7.6MAX	5.2MAX	/	/	/	/
YPRH0703	7.3±0.3	7.3±0.3	3.5MAX	1.3MAX	/	/	/
YPRH0704	7.3±0.3	7.3±0.3	4.5MAX	1.3MAX	/	/	/
YPRH1204	12.0±0.3	12.0±0.3	5.0MAX	5.4MAX	/	/	/
YPRH1205	12.0±0.3	12.0±0.3	6.0MAX	5.4MAX	/	/	/
YPRH1207	12.0±0.3	12.0±0.3	8.0MAX	5.4MAX	/	/	/
YPRH1209	12.0±0.3	12.0±0.3	10.0MAX	5.4MAX	/	/	/

■ YPRH0703 series

Part No.	L(uH)	L Test Freq.	DCR(Ω)Max	Rated Current (A)
YPRH0703-4R7□	4.70	100KHz	0.042	3.50
YPRH0703-150□	15.0	100KHz	0.130	1.33
YPRH0703-470□	47.0	100KHz	0.360	0.76

■ YPRH0704series


Part No.	L(uH)	L Test Freq.	DCR(Ω)Max	Rated Current (A)
YPRH0704-R33□	0.33	100KHz	0.012	7.00
YPRH0704-1R0□	1.00	100KHz	0.020	3.50
YPRH0704-6R8□	6.80	100KHz	0.055	2.10
YPRH0704-470□	47.0	100KHz	0.260	0.88
YPRH0704-680□	68.0	100KHz	0.440	0.69

■ YPRH1209 series

Part No.	L(uH)	L Test Freq.	DCR(Ω)Max	Rated Current (A)
YPRH1209-4R7□	4.70	100KHz	0.018	9.00
YPRH1209-470□	47.0	100KHz	0.120	4.00
YPRH1209-680□	68.0	100KHz	0.154	2.70
YPRH1209-151□	150	100KHz	0.510	1.60
YPRH1209-221□	220	100KHz	0.680	1.10
YPRH1209-142□	1400	100KHz	2.100	0.60


产品包装

TAPING DRAWINGS

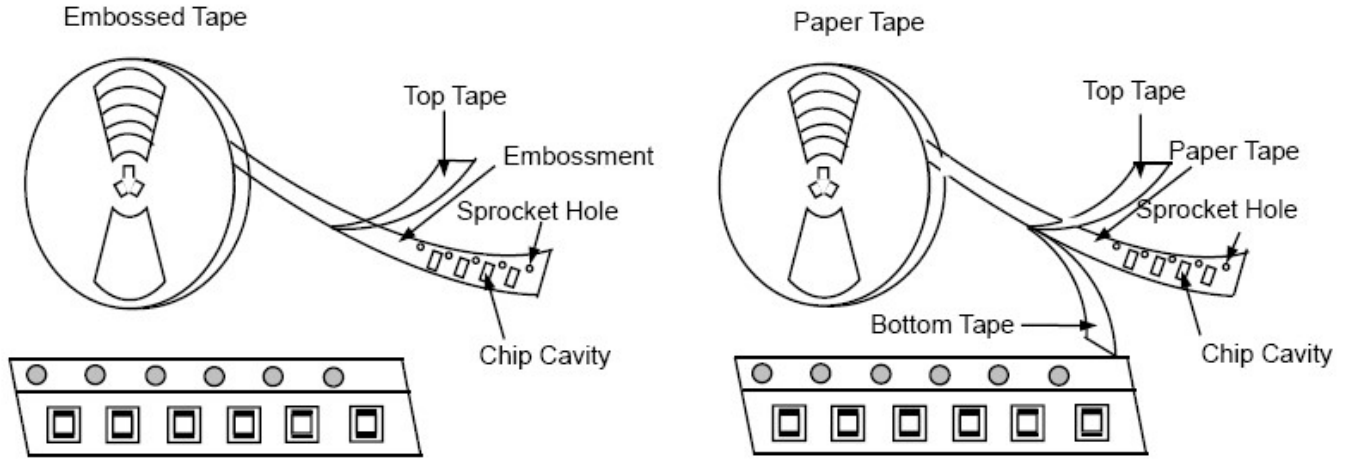

TAPING DIMENSIONS (UNIT: mm)

1. Embossed Tape (8/12mm Wide Tape)

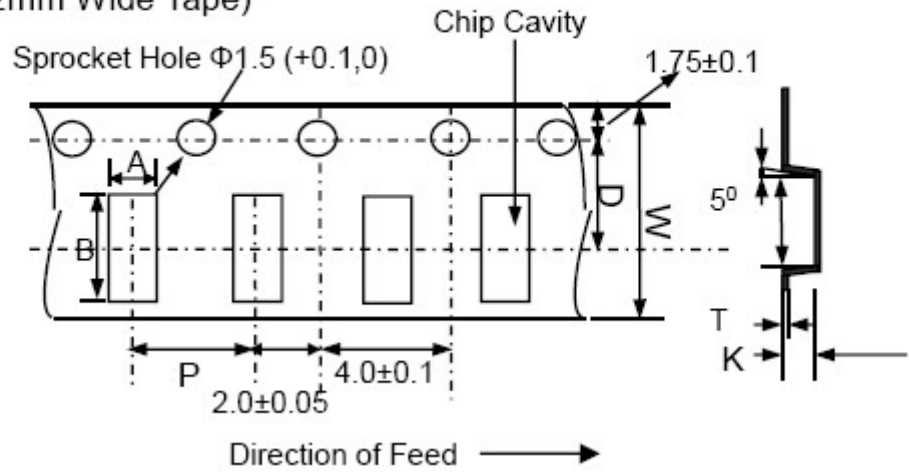

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [YJYCOIN](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)