


REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	CHK'D	JVL
9	5/2/06	JABO		REMOVED STRAIGHT TIP REFERENCE & TIP STYLE COLUMN	0037	9		6-24-93	
				DRAWING NO. BT-0037		SHT. 2 OF 3		SCALE	
				NYLON 6.6		MATERIAL:		DRAWN BY PMH DATE 6-24-93 CHK'D	
				UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.					
				DIMENSIONAL TOLERANCES ARE: (.XX) ±.02(.5) ANGLES ± (.XXX) ±.10(.25) (.XXX) ±.020(.51)					
				DOME-TOP Barb Ty CABLE TIES BT SERIES					
				PANDUIT CORP., TINLEY PARK, ILLINOIS					

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PART NO.	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE (lb)	CROSS SECTION	WEIGHT (lb) / 100 pcs.
	MIN. (mm)	MAX. (mm)									
BT1.51	1.50	1.50	.041	.141	.142	.185	.248	6.1	40	INTERMEDIATE	.12 (56)
BT21	2.00	2.00	.041	.141	.142	.185	.248	8.0	40	INTERMEDIATE	.16 (72)
BT31	3.00	3.00	.049	.141	.142	.185	.248	11.3	40	INTERMEDIATE	.27 (121)
BT41	4.00	4.00	.049	.141	.142	.185	.248	14.3	40	INTERMEDIATE	.35 (156)
BT25	2.00	2.00	.045	.185	.205	.220	.320	8.0	50	STANDARD	.25 (113)
BT35	3.00	3.00	.052	.185	.205	.220	.320	12.0	50	STANDARD	.40 (183)
BT45	4.00	4.00	.052	.185	.205	.220	.320	15.1	50	STANDARD	.51 (230)

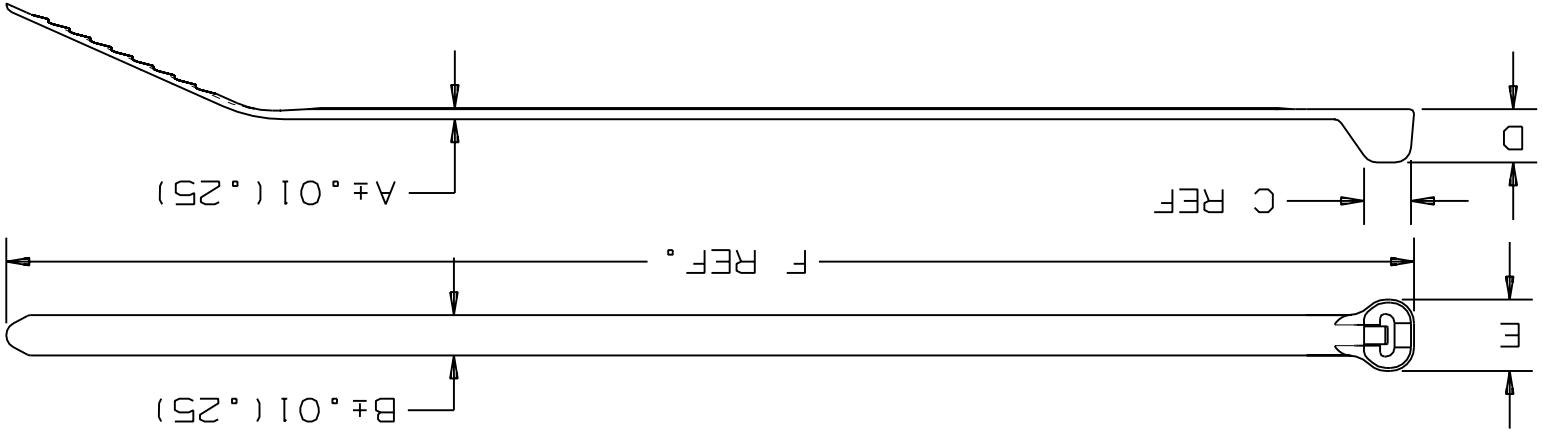

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panduit](#) manufacturer:

Other Similar products are found below :

[CF502550F-Q](#) [PK14-8R-X](#) [CBXJ2IW-A](#) [PK10-56R-L](#) [PCV-110CY](#) [PSL-SCBD-EI](#) [CBX4AW-AY](#) [CBXS2AW-A](#) [CS25-18SL-CY](#)
[CFPFLS2SAW](#) [PK10-10R-X](#) [PUM-049-C0](#) [PUM-925-C0](#) [SICH38-C](#) [SICH25-C](#) [CCS19-S8-X](#) [CCH57-S12-M30](#) [PCMBR-13](#) [PCPA11IW](#)
[CRE32](#) [M200X042UPT](#) [M200X050ACT](#) [M200X080FQT](#) [M200X100ACT](#) [M200X100AIT](#) [CRTW](#) [CSVBP](#) [CT-1000](#) [CT-1004](#) [CT-1104](#)
[CT-2550CH](#) [CT-2570CH](#) [M300X050ACT](#) [M300X100ACT](#) [CT-900HPH](#) [CUFB48BL](#) [CVED32VE](#) [CVED32VEPG](#) [CVED40VEN](#)
[CVED40VEPG](#) [CWF400](#) [CWMPV2340](#) [CWMPV2440](#) [CWMPV3340](#) [CWMPV3440](#) [MBEH-TLR](#) [MBH-MR](#) [MBH-MR316](#) [MBH-TLR316](#)
[MBSH-TR](#)