




Chicago Miniature Lighting, LLC

Lighting the world since 1910


T-1 1/4 Special Midget Flange Base & T-1 1/4 Bi-Pin Base (.100")

T-1 1/4 Special Midget Flange Base

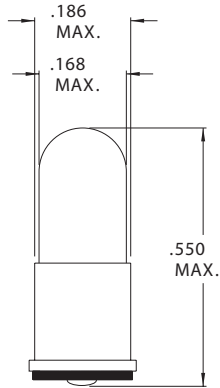

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM7302	1.30	.030	.006	100	S-2
CM8636	1.35	.060	.006	500	C-2R
CM8656	2.50	.400	.550	30	C-2R
CM8637	3.00	.190	.250	350	C-2R
CM3518	5.00	.115	.150	40,000	C-2R
CM3582	5.00	.060	.030	60,000	C-2R
CM3585	5.00	.060	.050	25,000	C-2R
CM8541	6.00	.060	.130	3,000	C-2R
CM8628	6.00	.200	.630	1,000	C-2R
CM8551	6.30	.200	.550	5,000	C-2R
CM8646	14.00	.080	.500	1,000	C-2F
CM737	28.00	.050	.300	16,000	C-2F
CM8632	28.00	.040	.320	1,000	C-2F

T-1 1/4 Bi-Pin Base (.100")

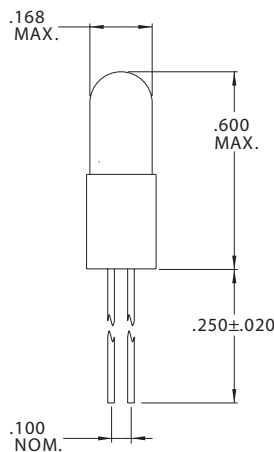

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM7306	1.30	.030	.006	100	S-2
CM7636	1.35	.060	.006	500	C-2R
CM7307	2.50	.400	.550	30	C-2R
CM7637	3.00	.190	.250	350	C-2R
CM7515	5.00	.115	.150	40,000	C-2R
CM7580	5.00	.060	.030	60,000	C-2R
CM7583	5.00	.060	.050	25,000	C-2R
CM7309	6.00	.060	.130	3,000	C-2R
CM7628	6.00	.200	.630	1,000	C-2R
CM7310	6.30	.200	.550	5,000	C-2R
CM7646	14.00	.080	.500	1,000	C-2F
CM7052	28.00	.030	.200	5,000	C-2F
CM7632	28.00	.040	.320	1,000	C-2F

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Chicago Miniature manufacturer:

Other Similar products are found below :

[5305H1/5](#) [6091QM1-12V](#) [7011X1/5-100](#) [93](#) [PR18](#) [13](#) [15](#) [1493](#) [1731](#) [1874](#) [2110QA2](#) [212-2](#) [2150QA4](#) [2330D4](#) [248](#) [2620T1](#) [293](#) [2990D4-6V](#) [2990P3-6V](#) [301](#) [3015](#) [1680](#) [1705](#) [2150A2](#) [2158](#) [2191U5-6V](#) [GF660](#) [PLS13W/50](#) [24ES](#) [PR15](#) [2990D1-6V](#) [2990P1-12V](#) [2990P6-28V](#) [CMD11-21VGC-100](#) [CMD11-21VRC-100](#) [CMD55AB](#) [CMD5760](#) [303](#) [4302H1-5V](#) [455](#) [4610](#) [4745A](#) [5300A75](#) [5307H3](#) [3122](#) [5635D1](#) [4106-W-19.25](#) [4300E11NF](#) [4327](#) [1032D5](#)