



## 高效整流二极管 High Efficient Rectifier

## ■ 特征 Features

- $I_o$  2.0A
- VRMM 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability


## ■ 用途 Applications

- 整流用 Rectifier

## ■ 极限值 (绝对最大额定值)

## Limiting Values (Absolute Maximum Rating)

## ■ 外形尺寸和印记 Outline Dimensions and Mark

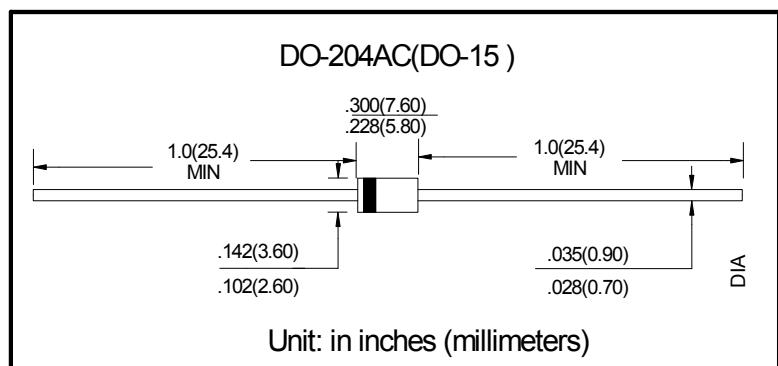





参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	HER20							
				1G	2G	3G	4G	5G	6G	7G	8G
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V		50	100	200	300	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载, $T_a$ (FIG.1) 60Hz Half-sine wave, Resistance load, $T_a$ (FIG.1)								2
正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	正弦半波 60Hz, 一个周期, $T_a=25^\circ C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ C$								60
结温 Junction Temperature	$T_J$	$^\circ C$									-55~+150
储存温度 Storage Temperature	$T_{STG}$	$^\circ C$									-55 ~ +150

■ 电特性 ( $T_a=25^\circ C$  除非另有规定)Electrical Characteristics ( $T_a=25^\circ C$  Unless otherwise specified)


参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	HER20							
				1G	2G	3G	4G	5G	6G	7G	8G
正向峰值电压 Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=2.0A$	1.0		1.3		1.7			
反向峰值电流 Peak Reverse Current	$I_{RRM1}$	$\mu A$	$V_{RM}=V_{RRM}$	$T_a=25^\circ C$							2.5
	$I_{RRM2}$			$T_a=125^\circ C$							150
反向恢复时间 Reverse Recovery time	$t_{rr}$	ns	$I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$			50					75
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-A}$	$^\circ C/W$	结和环境之间 Between junction and ambient								40
结电容 Typical junction capacitance	$C_j$	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.			50					35



## ■特性曲线(典型) Characteristics(Typical)

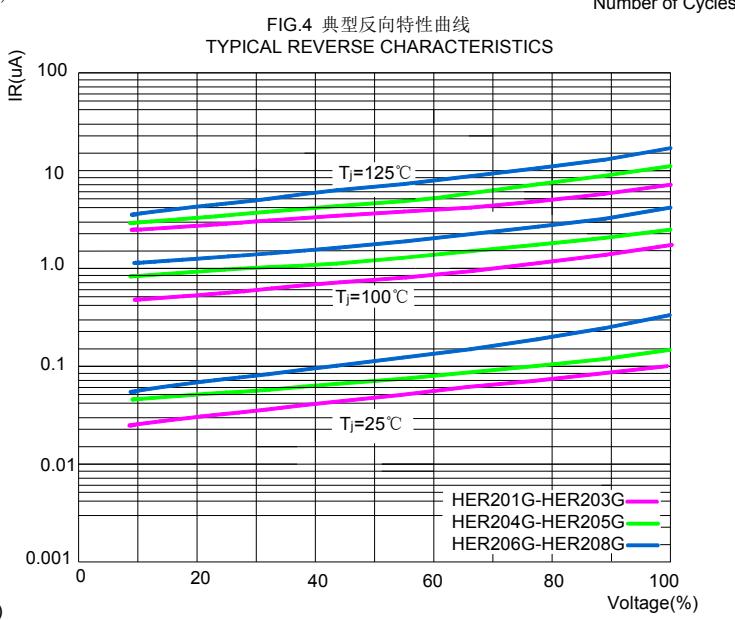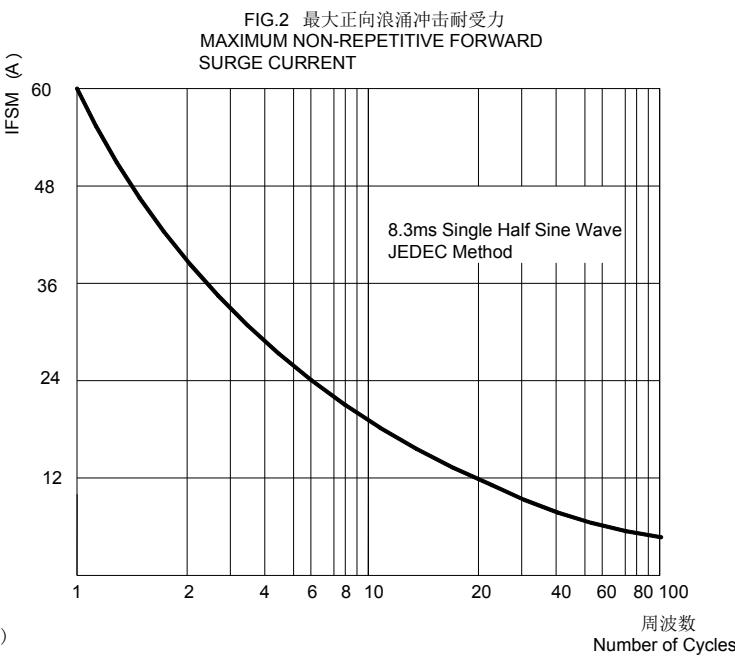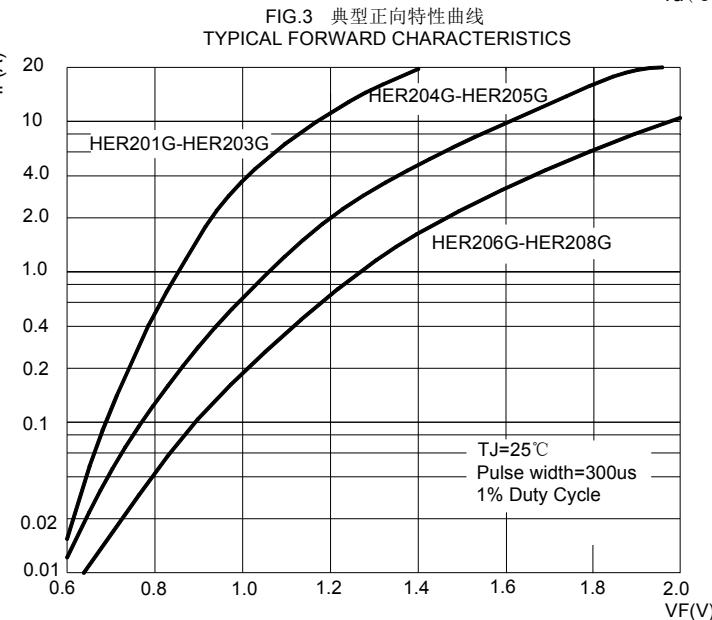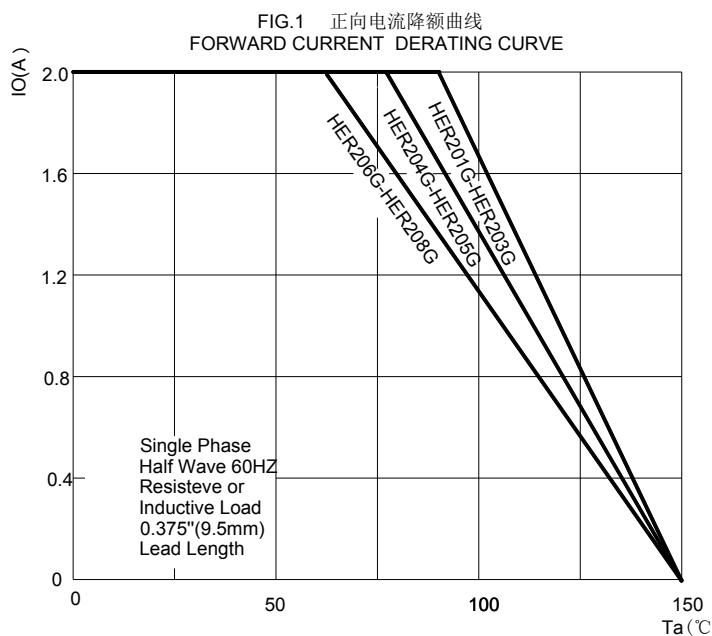

**FIG.5 反向恢复时间试验电路及测试波形示意图  
Diagram of circuit and Testing wave form of reverse recovery time**

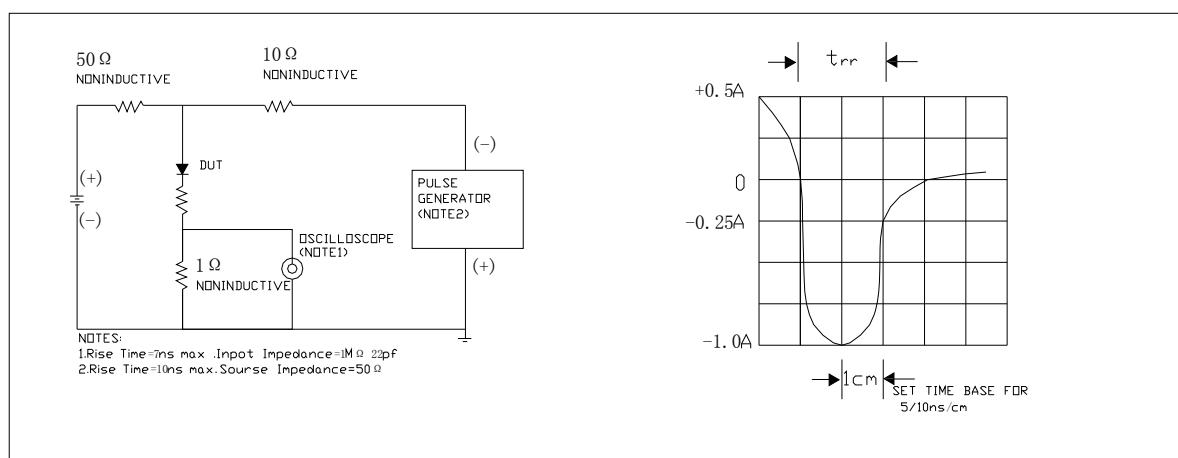

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Diodes - General Purpose, Power, Switching category:***

***Click to view products by Yangjie manufacturer:***

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)