



LED Power Supply Constant Voltage	
Model	LSB3012CV
Voltage	12V
Current	2.5A
Power	30W

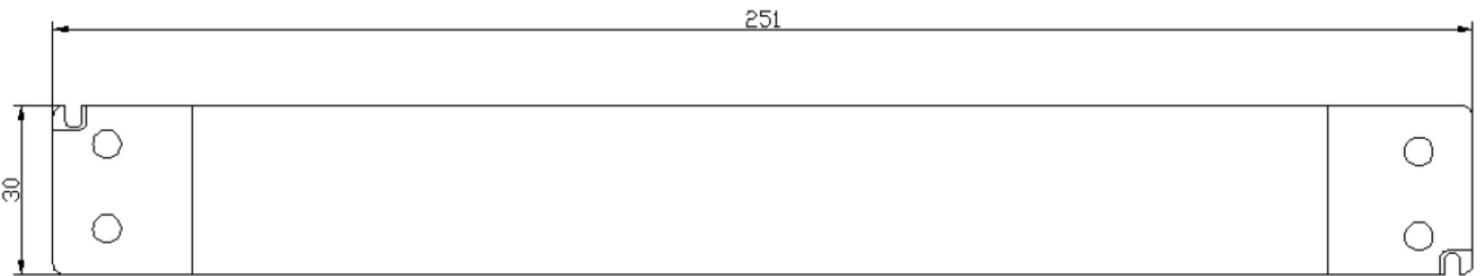

Input	Rated input voltage	230 VAC	
	Range of input voltage	220-240VAC	
	Frequency	50Hz	
	Power Factor	≥0.90 @Full Load ,220-240VAC	
	Current	0.3 A MAX. @Full Load	
	Start-Up time	<1S for ERP @Full Load	
	Inrush Current	20A MAX. @Full Load. 240 VAC	
	Unload Power Consumption	≤0.5W	
Output	Unload voltage	12.6VDC MAX	
	Load Voltage rang	11.4-12.6VDC	
	Constant Voltage	12V	
	Voltage Accuracy	±5% @220-240VAC	
	Voltage Regulation	≤3%@Full Load	
	Hold-up Time	NA	
	Efficiency in full load	≥83,49%@Full Load ,240VAC	
	Ripple	<3Vp-p @Full Load ,220-240VAC	
Power Max		30W	
Dimming	Dimmable or not	NA	
	Dimming mode	NA	
	Dimming current range	NA	
Protection	Over load Protection	105-150%	
		Protection type: Auto Restore	
		>16VDC	
	Over Voltage Protection	Protection type: Auto Restore	
	Short circuit Protection	Protection type: Auto Restore	
Over Temperature protection	Protection type: Auto Restore		
HI-pot	Input-Output(V.AC)	3000V/5mA/1min	
	Input-FG(V.AC)	NA	
	Output-FG(V.AC)	NA	
Isolation	Leakage Current	<0.5mA(240VAC)	
	Input-Output(V.AC)	≥10MΩ@500VDC	
	Input-FG(V.AC)	NA	
Environment/Life	Output-FG(V.AC)	NA	
	Operating Temperature	-10°C...+40°C	
	tc	85°C	
	Storage Temperature	-20°C...+60°C	
	Humidity	20%-90%RH	
	Life time	>30,000h @40°C	
HSH requirement	RoHS		
Feature	Dmension	251*30*16 (LXWXH)mm	
Safety @ EMC	Approval	CE	
	Safety standards	EN 61347-1; EN61347-2-13 EN60598-1; EN60598-2-6	
	EMI	EN55015; EN61000-3-2 Class C EN61000-3-3	
	EMS		EN61547; EN 61000-4-2 - 8KV; 4KV
			Performance Criteria B
		EN 61000-4-5 — 1000V; Performance Criteria C	

LED Power Supply Constant Voltage	
Model	LSB3012CV
Voltage	12V
Current	2.5A
Power	30W

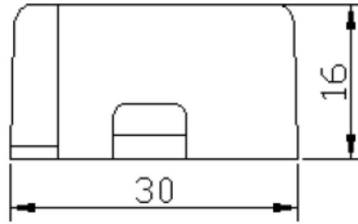

<b>ESPE</b> 		LED POWER SUPPLY LSB3012CV	
INPUT.....230V~ 50Hz 0.3A			Constant Voltage
OUTPUT.....12V= 2.5A			<b>SELV</b>
$\lambda \geq 0.9$ $t_c: 85^\circ C$ $t_a: 40^\circ C$		IP20	  <b>MADE IN CHINA</b>

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies category](#):*

*Click to view products by [Espe manufacturer](#):*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#)  
[LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#)  
[LE42S24VN](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-](#)  
[S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [UCP20U-480-36](#) [EVM120W-3000-40](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#)  
[EVM120W-2700-42-ECN2](#) [79278](#) [MU060C105AQ\\_0-10V](#) [EUD-150S350DVA](#) [LSWC-040S105PS](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-](#)  
[36AB](#) [HVG-320-54AB](#) [ELEMENT 30/220-240/700 S](#) [OT FIT 38/220-240/900 CS S MINI](#) [ELEMENT 180/220-240/24 G2](#) [NPF-120D-24BE](#) [NPF-](#)  
[120D-48BE](#) [NPF-120D-54BE](#) [PWM-40-36](#) [PWM-60-36](#) [LUD-060S150BSF](#) [RCD-48-1.00](#)