



*Rugged and reliable hour meters in rectangular or round case, for AC or DC operation*



Ruggedness and reliability are featured in the Series 7795 electric hour meters. One-tenth hour resolution, round or rectangular package and cutout styles and a choice of DC or AC inputs allow its use on construction machinery or leased equipment to determine usage, maintenance, and warranty periods.

- Easy to install
- Compact and requires only a small panel cutout
- Durable and shock resistant
- Lightweight for use on portable equipment
- Sealed against dirt and moisture
- Tamper-proof and non-resettable
- Easy to read figures

## SPECIFICATIONS

### Panel Mounting:

Round Case: 2.00" diameter cutout  
 Rectangular Case: 0.95" x 1.45" cutout

### DC Hour Meters:




Input: 10 to 32 VDC  
 Accuracy: 0.02%  
 Capacity: Up to 9999.9 hours, automatic recycle at zero  
 Operating Temperature: -40° to +185 °F (-40° to +85 °C)

### AC Hour Meters:

Input: 120 VAC (range ± 10%), 60 Hz  
 Accuracy: 1%  
 Capacity: Up to 9999.9 hours, automatic recycle at zero  
 Operating Temperature: -65° to +154 °F (-18° to +68°C)

Model No.	Description
779555-216	Round Case, 10 to 32 VDC, Spade Terminals
779565-216	Rectangular Case, 10 to 32 VDC, Spade Terminals
779516-201	Round Case, 120 VAC, Screw Terminals
779526-201	Round Case, 120 VAC, 7" Leads
779536-201	Rectangular Case, 120 VAC, Screw Terminals
779546-201	Rectangular Case, 120 VAC, 7" Leads

### Dimensions:

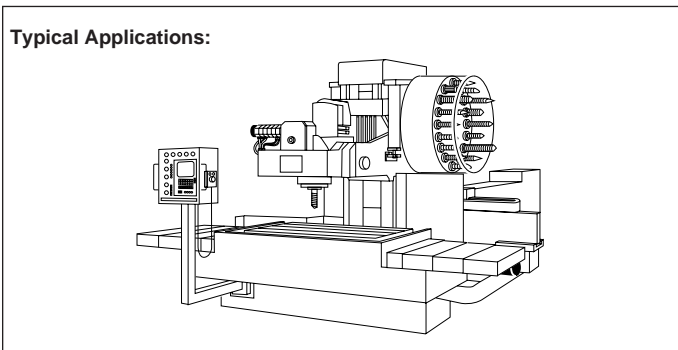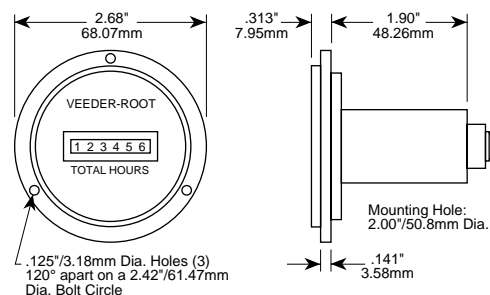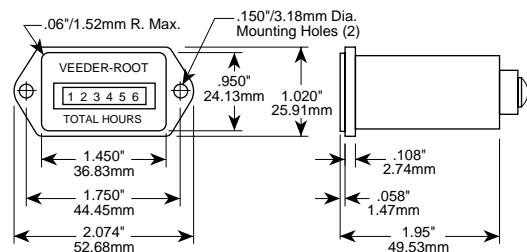

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Veeder Root](#) manufacturer:*

Other Similar products are found below :

[0166726-006](#) [0195316-051](#) [0116425-007](#) [RFMT00R](#) [RFMV00](#) [RFXDC10](#) [RFXP10](#) [RFXS00](#) [RFXT00](#) [C342-0462](#) [C346-0422](#) [C628-20052](#)  
[C628-20300](#) [C628-40050](#) [C628-41002](#) [C628-41300](#) [C628-70002](#) [C628-81002](#) [C628-90000](#) [C628-91002](#) [S628-20300](#) [A103-A14](#) [RFMSK00](#)  
[RFMT00](#) [RFMV00R](#) [RFXD00](#) [RFXD10](#) [RFXS10](#) [C342-1562](#) [C342-3462](#) [C346-0513](#) [C628-20000](#) [C628-20002](#) [C628-21350](#) [C628-40000](#)  
[C628-40052](#) [C628-41302](#) [C628-51002](#) [C628-60002](#) [VC773-342](#) [0317680-001](#) [0703006-003](#) [0726845-001](#) [0727245-001](#) [0743425-003](#)  
[0743425-005](#) [0743797-001](#) [0744386-211](#) [0745815-001](#) [0779526-201](#)