



# pneumatic cylinder sensors

For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.



#### **TECHNICAL DATA**

Metallic sensor surface	NO
Oil and lubriating coolants	YES
Rough ambient conditions	YES
Ambient temperature (min/max)	-25°C / 130°C
Cable length	0.3m
Construction type housing	Cylinder plain
Degree of protection (IP)	IP67
Diameter sensor	3.6mm
Execution of the rounded groove	3.75mm rounded groove
Increased ambient temperatures > 80°C	YES
Length of sensor	20.5mm
Material housing	Zinc die-cast
Material of cable sheath	Teflon
Metal housing	YES
Mounting access cylinder groove	Lateral
Position of the sensor surface	Border area of the device
Strong vibration / motion	YES
Cross-/short circuit identification possible	YES
Hysteresis	1mm
Low hysteresis	YES
Low sensitivity	NO
Max. output current	150mA
No load current	15mA
Number of poles	3
Operating voltage (min/max)	10V / 30V
Rated supply voltage at DC (min/max)	10V / 30V
Reed contact	NO
Reverse polarity protection	YES
Sensor surface (active)	Middle area
Setting via teach-in	NO
Short-circuit-proof	YES

### MZR40158


# pneumatic cylinder sensors



#### **TECHNICAL DATA**

Suited for safety functions	NO
Switching frequency	1000Hz
Two switchpoints	NO
Type of actuation	Magnet
Type of electric connection	Cable with connector
Type of electric connection	Cable connector M8
Type of switch function	Normally open contact
Type of switching output	PNP
Voltage drop	2V
Voltage type	DC
With LED indication	NO
With monitoring function downstream switching devices	NO
Cylinder sensors	YES
Short travel path	NO


#### CONNECTION




**Colors:** 1 = BN (brown), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 3 = L-, 4 = PNP NO

#### **DIMENSIONAL DRAWING**



#### **ADDITIONAL INFORMATION**

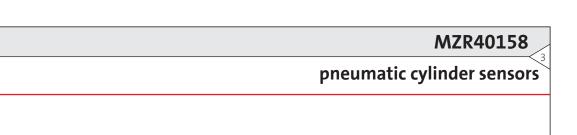



### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Industrial Hall Effect/Magnetic Sensors category:

Click to view products by IPF ELECTRONIC manufacturer:

Other Similar products are found below:

GT-13013 GT-13040 GT-14114 GT-14123 DRR-129(62-68) ATS682LSHTN-T SR4P2-C7 GT-12076 GT-13012 GT-14049 GT-14067 GT
14132 GT-18030 103FW12-R3 A1155LLHLT-T A1106EUA-T SMSA2P30CG P2D-000 GN 55.2-SC-15-3 GN 55.2-SC-5-3 103FW41-R1 KJR
D100AN-DNA-VE KJR-D100AN-DNIA-V2 SR-10018 ECC464558EU SC9641TS CS200BK QMC6308 VSM025A/8mA M10-JB5020D M12
JB8002C M12-JB8002D M12-JK5002B M8-MJK M12-MJK MM18-70APS-ZCK 103FW5-4 ATS128LSETN-T TLE4906LHALA1

TLE49452LHALA1 MMA8452Q BU52013HFV-TR MRMS591A 103SR14A-1 MZT7-03VPS-KR0 MZT7-03VPS-KW0 MZT8-03VPS-KW0

MZT8-28VPS-KP0 MM12-60APO-ZUK A1326LLHLX-T