

LogiLink®

USB-C Power Adapter 65W

Art. No.: PA0175





Designed for travelers with fast charging USB-C laptop/smartphone/tablet.

Features:

- » Compact and lightweight, suitable for travelling; to use in the cafe, restaurant, hotel.
- » Compatible with USB-C mobile devices/tablet/powerbank/laptop.
- » Full safety design: Built-in protection against over current, over voltage, over temperature and short-circuit protection

Specification:

Input Voltage	AC 100-240V 50/60Hz 1.5A max
Output Power	5V 3A, 5.2V 2.4A, 9V 3A, 12V 3A, 14.5V 2A, 15V 3A, 20V 3.25A, 20.3V 3A
Efficiency	Level VI
Dimension	67 x 67 x 29mm (not including cable)
Weight	235g
Cable Length	1.8m
AC Cable Length	1.2m

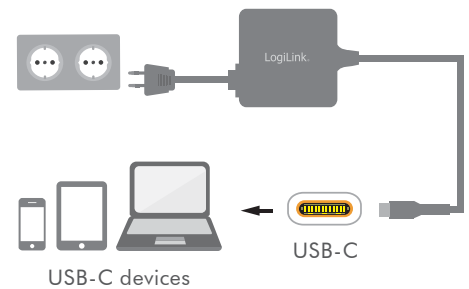

Package Contents:

- » 1 x USB-C Power Adapter
- » 1 x AC Power Cord
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 188 x 138 x 40mm
- » Packing Weight: 0.4kg
- » Carton Dimension: 450 x 268 x 205mm
- » Carton Q'ty: 20pcs
- » Carton Weight: 8.7kg

Warning

- *For use with Information Technology Equipment.
- *Only to be used indoor.
- *Only to be used after powering on.
- *Only to be used within max load.
- *Remove the power adapter from its power source after use.



PA0175



4 052792 048261

Made in China



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademark of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Logilink](#) manufacturer:

Other Similar products are found below :

[YS50-1903150](#) [ADP-40KD BBBM](#) [DTA27-3X-W-5](#) [212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [212A2220-02](#) [212A2220-04](#)
[FWE030015A-10A](#) [TRH100A135-02E12-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A280-01E13-](#)
[Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH50A120-02E01-Level-VI](#) [TRH50A120-12E01-Level-VI](#) [TRH50A120-40E01-Level-VI](#)
[TRH50A150-12E12-Level-VI](#) [TRH50A180-11E03-Level-VI](#) [TRH50A240-02E03-Level-VI](#) [TRH70A120-11E01-Level-VI](#) [TRH70A150-](#)
[12E02-Level-VI](#) [TRH70A240-11E03-Level-VI](#) [416FG41017](#) [DTA27-0512FWX-W3](#) [TRH100A120-02E12-Level-VI](#) [TRH100A150-11E12-](#)
[Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#)
[TRH100A480-11E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH50A120-11E01-Level-VI](#) [TRH50A120-49E01-Level-VI](#) [TRH50A150-](#)
[11E02-Level-VI](#) [TRH50A150-12E02-Level-VI](#) [TRH70A120-01E01-Level-VI](#) [TRH70A480-02E03-Level-VI](#) [KR8-PS01](#) [1894875](#)
[FWE030012A-10A](#) [FWE050024B-10A](#) [820A4080G](#) [825A0052-03](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#)