

Key Features

- Compact size (72mm x 25mm)
- 2 dBi gain
- Mounts on any non metallic surface
- Quad band GSM, 3G and WiFi
- ISM: 868 and 915MHz
- RoHS compliant



General Description

Siretta Alpha 3A multi band antennas are based on an efficiently tuned PCB element that is matched with a wide variety of RF & M2M modules, operating on quad band GSM, 3G, ISM and WiFi frequencies. It is designed as a ready to go antenna which fits most telemetry products.

Already proven in many applications where space is at a premium, this product is ideal as it is ground plane independent and compact, making it a popular choice where the user does not want to draw attention to having telemetry equipment on board.

With an EndFed cable and measuring just 72 x 25mm this version comes with its own adhesive mounting pad and is supplied with various cable length and connector options.

Additional Considerations

- Mounts discretely in installation, good for covert use
- Operates on all quad band GSM and 3G cellular networks
- ISM and WiFi capable
- Meets all EU compliance criteria for electronic goods
- Intended for internal to equipment use

Rev 1.3

Key Specifications - Electrical

Temperature range:	-40 to +85°C
Impedance:	50 ohm
V.S.W.R:	<2.0
Frequency range:	824~894/1710~2170/ 2400~2500MHz
Polarization:	Linear

Key Specifications - Mechanical

Dimensions:	72 x 25 x 2.5mm
Cable:	RG174
Connector:	SMA, FME, MMCX, Fakra and others
Mounting method:	Adhesive

Gain

ISM

868MHz:	1.9dBi
915MHz:	3dBi

GSM

850MHz:	1dBi
900MHz:	2.08dBi
1800MHz:	-0.44dBi
1900MHz:	-2.32dBi

3G


2100MHz:	2.62dBi
----------	---------

WiFi

2400MHz	1dBi
---------	------

Test Results

Peak Gain (dBi)

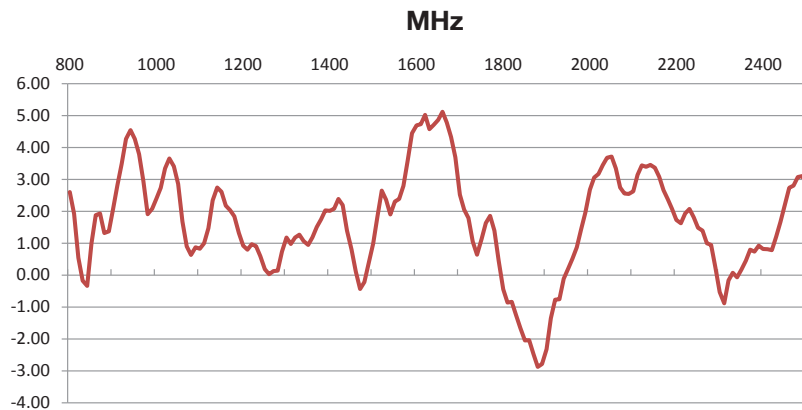


UL Tested (Basingstoke, UK)

Part: ALPHA3A/3M/SMAM/S/S/26

Ref No: 10215162JD02

Date: 13/02/2014

Efficiency %

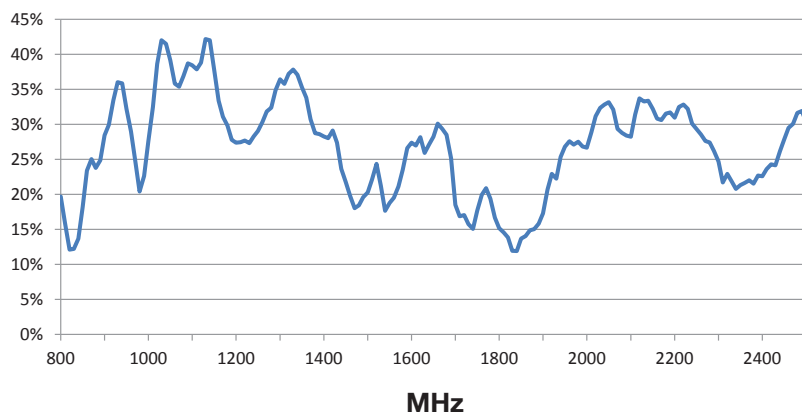

UL Tested (Basingstoke, UK)


Part: ALPHA3A/3M/SMAM/S/S/26

Ref No: 10215162JD02


Date: 13/02/2014

Radiation Pattern


XY Plane

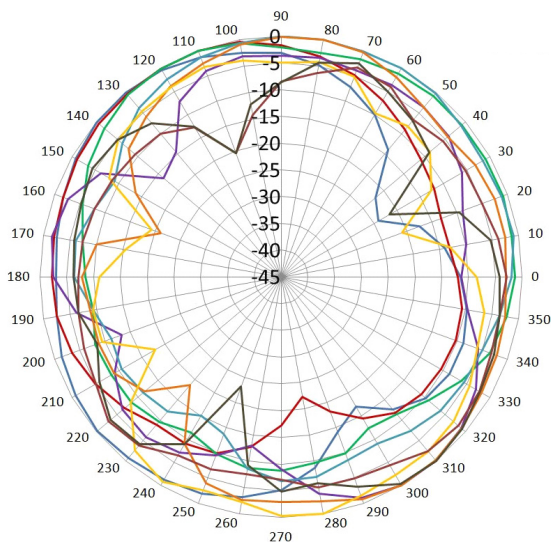

XZ Plane

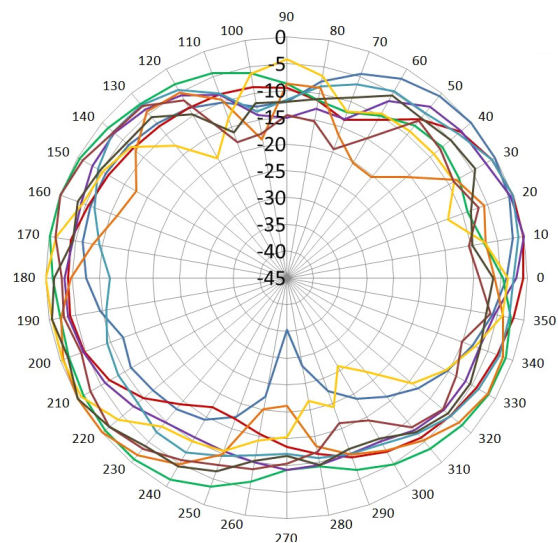

YZ Plane

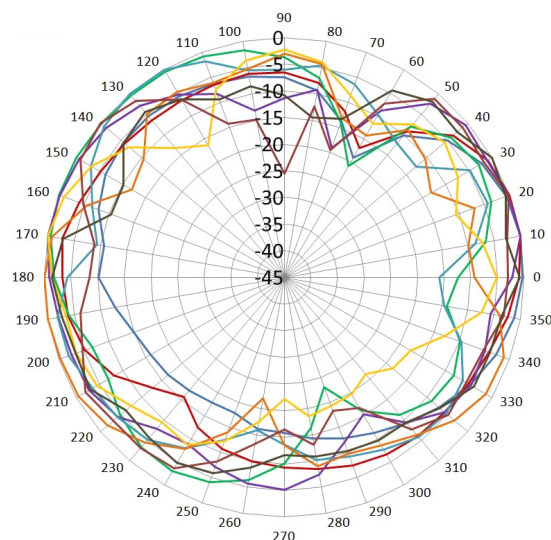

- 760 MHz
- 824MHz
- 894MHz
- 1710MHz
- 1850MHz
- 1990MHz
- 2170MHz
- 2400MHz
- 2500MHz

Ordering Details

Part Number

Description

ALPHA3A/3M/SMAM/S/S/26

Quad Band GSM/GPRS/3G/ISM and WiFi Antenna, 3M Cable, SMA Male Connector

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SIRETTA](#) manufacturer:

Other Similar products are found below :

[ALPHA4A/5M/SMAM/S/S/26](#) [DELTA5A/X/SMAM/S/S/17](#) [OSCAR17/X/TNC/S/S/19](#) [DELTA5A/X/BNCM/S/S/17](#) [SNYPER-LTE-SPECTRUM](#) [ASMA2000F058L13](#) [ASMA2000C058L13](#) [TANGO14/5M/LL/SMAM/S/S/24](#) [TANGO1/1M/FMEF/S/S/4](#) [ASME500F058L13](#) [TANGO3/0.5M/SMAM/S/S/31](#) [TANGO40/X/NTYPEF/S/S/32](#) [QUARTZ-W22-LTE\(EU\)+ACC](#) [ASMA500B174L13](#) [31557](#) [ECHO40/0.1M/UFL/S/S/32](#) [MIKE1A/5M/FMEF/S/S/20](#) [QUARTZ-W22-UMTS\(EU\)+ACC](#) [TANGO11A/2.5M/SMAM/S/S/19](#) [ASMA500F058L13](#) [ZETA-N-UMTS](#) [ECHO11/0.2M/IPEX/S/S/12](#) [ASMA300E174L13](#) [ASMA1000F058L13](#) [DELTA19/X/SMAM/S/S/35](#) [ASMA2000E058L13](#) [ASMZG300F058L13](#) [MIKE3A/5M/SMAM/S/S/17](#) [TANGO15/3M/SMAM/SMAM/S/S/24](#) [TANGO20/3M/SMAM/S/S/26](#) [ASMZG500A058L13](#) [ASMZG1500F058L13](#) [ALPHA1A/2.5M/SMAM/S/S/11](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO11A/5M/LL/SMAM/S/S/19](#) [TANGO29/1M/SMAM/RP/S/35](#) [ASME2000F058L13](#) [ASMK015X174S11](#) [LC300-N2-GPRS](#) [DELTA6A/X/SMAM/S/S/11](#) [MIKE1A/2.5M/FMEF/S/S/20](#) [ASMZG1000F058L13](#) [OSCAR41/X/NTYPEF/S/S/29](#) [TANGO22/3M/SMAM/SMAM/SMAM/26](#) [OSCAR420/0.4M/NTYPEF/S/S/19](#) [ASMK010X174S11](#) [ZETA-N2-GPRS](#) [ADAPT/SMAM/RP](#) [OSCAR18/X/NF/S/S/22](#) [TANGO14/3M/SMAM/S/S/24](#)