


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes “ConductRF”, Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with “DC-9GHz”
4. Single Centered Marker up to 15’(4.5M), Two Markers 12”(30cm) from ends for lengths over 15’(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 9GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Anti-Static Bag with ConductRF Label.(See Separate Label Instruction)


Site-Flex Phase Stable Rugged RF Test Cable

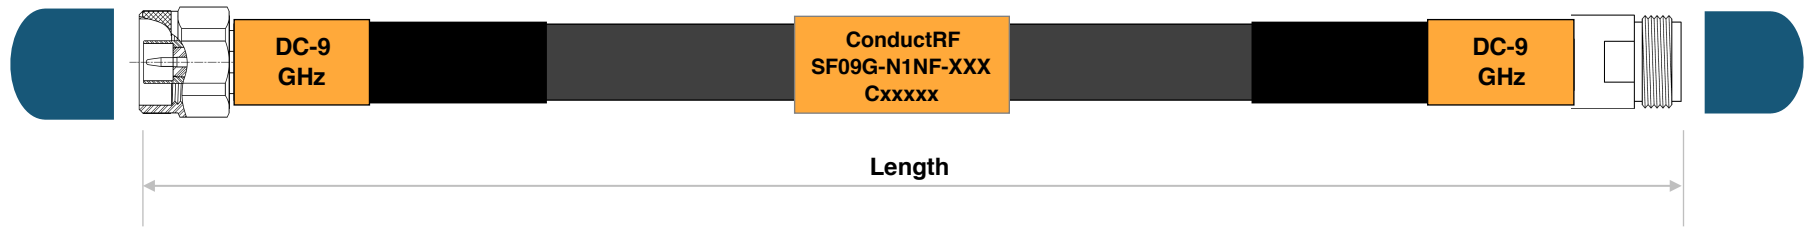

| XXX | Length | Max Insertion Loss(dB) | | |
|-----------|--------|------------------------|-------|-------|
| | | 3GHz | 6GHz | 9GHz |
| 1M0 | 1M | 0.908 | 1.356 | 1.729 |
| F03 | 3ft | 0.841 | 1.256 | 1.601 |
| F05 | 5ft | 1.317 | 1.973 | 2.521 |
| F08 | 8ft | 2.031 | 3.049 | 3.901 |
| F10 | 10ft | 2.507 | 3.766 | 4.821 |
| F12 | 12ft | 3.696 | 5.560 | 7.121 |
| VSWR(max) | | 1.20:1 | | |

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

| | | | | | | | | | | |
|------|-------------|-----|-------|----------|-----------------------------|--|---|---------------------|--------------------------------|---|
| | | | | | Customer DWG | Title: Site-Flex - Type-N Male to Type-N Female - DC-9GHz | | | |  |
| | | | | | Remarks: | Originated: 02/19/16 | Conduct RF sales@ConductRF.com Tel: +1 978 374 6840 | Range: SF | Sheet 1 of 1 | |
| | | | | | | | | Dwg Ref: SF09G-N1NF | | |
| 1 | Pre-Release | | DG | 10/18/16 | Tolerances: Length +/-2% | Checked: JW | Approved: PL | Rev: 1 | Part No: SF09G-N1NF-XXX | |
| REV. | DESCRIPTION | ECN | DRAWN | DATE | REVISION HISTORY | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [CONDUCTRF](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [5718X-01PD-19RO](#)
[CRCW04021100FRT7](#) [CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#)
[LUC-012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GD](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#) [LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)