



### Key Features

- Quad band GSM/GPRS
- 3G 2100MHz
- Low profile design
- Through hole mount
- Ground plane independent
- IP67 rated
- Adhesive plate
- RoHS compliant

### General Description

The Tango 27 antenna is the most compact, versatile, IP67 rated, quad band GSM/GPRS and 3G antenna. Ideal for through hole mount applications that require a high performance GSM antenna with secure mounting. It is supplied with a 2.5M cable and SMA male connector. Custom cable lengths and connector types are available for volume orders.

### Additional Considerations

- Operates on global GSM/GPRS networks as well as 3G 2100MHz
- Housed in a robust ABS casing for extreme climatic and operational environments
- Very discrete design for use of high sided vehicles or telemetry equipment in unmanned locations
- For secure, permanent fixing
- Does not require additional placement on metallic surface
- Meets all EU compliance criteria for electronic goods

Rev 1.2

#### Electrical Specifications

Operating temperature:	-30 to +65°C
Impedance:	50 ohm
Gain:	2.16dBi
VSWR:	≤ 2.1
Power handling:	35W
Operating frequencies:	GSM: 850, 900, 1800, 1900MHz 3G: 2100MHz

#### Mechanical Specifications

Dimensions:	46 x 15mm (DxH)
Connector:	SMA Male
Cable:	2.5M RG174
Housing colour:	Black
Housing material:	ABS
Mounting method:	Through hole
Base:	Adhesive

#### Gain


##### GSM

850MHz:	-0.04dBi
900MHz:	-1.84dBi
1800MHz:	-3.01dBi
1900MHz:	-5.12dBi

##### 3G

2100MHz:	-13.72dBi
----------	-----------

### Gain vs. Frequency Graph

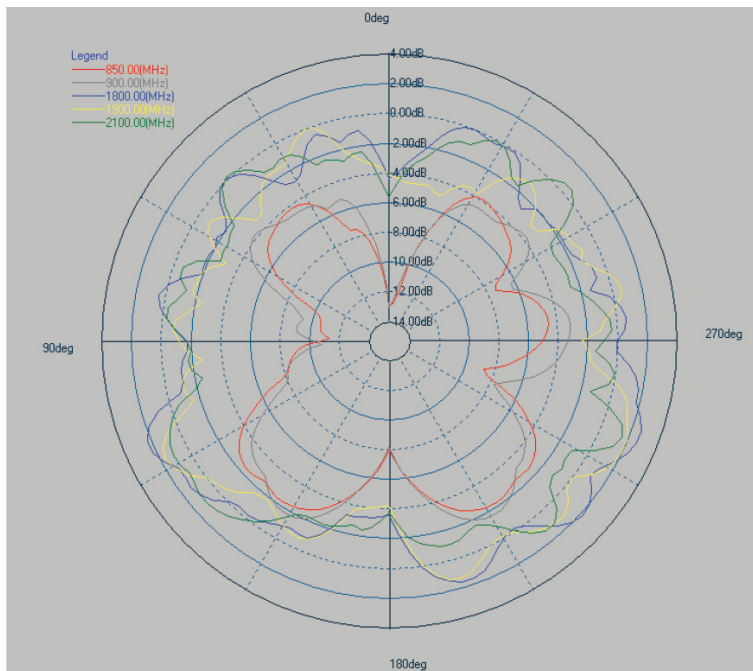

**UL Tested (Basingstoke, UK)**  
Part: TANGO27/2.5M/SMAM//S/S/17

### Ordering Details

Part number	Description
TANGO27/2.5M/SMAM/S/S/17	Quad Band GSM & 3G Through Hole Mount Puck Antenna, 2.5M RG174 Cable, SMA Male Connector

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SIRETTA](#) manufacturer:*

Other Similar products are found below :

[ALPHA4A/5M/SMAM/S/S/26](#) [DELTA5A/X/SMAM/S/S/17](#) [OSCAR17/X/TNC/S/S/19](#) [DELTA5A/X/BNCM/S/S/17](#) [SNYPER-LTE-SPECTRUM](#) [ASMA2000F058L13](#) [ASMA2000C058L13](#) [TANGO14/5M/LL/SMAM/S/S/24](#) [TANGO1/1M/FMEF/S/S/4](#) [ASME500F058L13](#) [TANGO3/0.5M/SMAM/S/S/31](#) [TANGO40/X/NTYPEF/S/S/32](#) [QUARTZ-W22-LTE\(EU\)+ACC](#) [ASMA500B174L13](#) [31557](#) [ECHO40/0.1M/UFL/S/S/32](#) [MIKE1A/5M/FMEF/S/S/20](#) [QUARTZ-W22-UMTS\(EU\)+ACC](#) [TANGO11A/2.5M/SMAM/S/S/19](#) [ASMA500F058L13](#) [ZETA-N-UMTS](#) [ECHO11/0.2M/IPEX/S/S/12](#) [ASMA300E174L13](#) [ASMA1000F058L13](#) [DELTA19/X/SMAM/S/S/35](#) [ASMA2000E058L13](#) [ASMZG300F058L13](#) [MIKE3A/5M/SMAM/S/S/17](#) [TANGO15/3M/SMAM/SMAM/S/S/24](#) [TANGO20/3M/SMAM/S/S/26](#) [ASMZG500A058L13](#) [ASMZG1500F058L13](#) [ALPHA1A/2.5M/SMAM/S/S/11](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO11A/5M/LL/SMAM/S/S/19](#) [TANGO29/1M/SMAM/RP/S/35](#) [ASME2000F058L13](#) [ASMK015X174S11](#) [LC300-N2-GPRS](#) [DELTA6A/X/SMAM/S/S/11](#) [MIKE1A/2.5M/FMEF/S/S/20](#) [ASMZG1000F058L13](#) [OSCAR41/X/NTYPEF/S/S/29](#) [TANGO22/3M/SMAM/SMAM/SMAM/26](#) [OSCAR420/0.4M/NTYPEF/S/S/19](#) [ASMK010X174S11](#) [ZETA-N2-GPRS](#) [ADAPT/SMAM/RP](#) [OSCAR18/X/NF/S/S/22](#) [TANGO14/3M/SMAM/S/S/24](#)