

SDA1 - 10, - 15

DIN rail 10A & 15A solid-state relays

DURAKOOL



- High load voltage - up to 480VAC
- 4 ~ 32VDC control input voltage
- Single Phase, Zero cross-over switching
- LED control input indicator
- Integrated heatsink
- RoHS Compliant



Output (load)

Load type	SPST-NO (1 N/O) Resistive	
Load current	10A, 15A	
Load switching voltage	AC V _{rms}	40 - 480V
Maximum peak voltage	AC V _{pk}	900V
Minimum load current	0.1A	
Inrush Current (max.)	10ms	10A: 120A / 15A: 160A
I ² t	10A: 72A ² s / 15A: 128A ² s	
Switch type	Zero Cross (Consult factory for Random)	
On voltage drop	V AC	1.6V
Leakage current off	mA	≤ 10mA

Input (control)

Control voltage (rated)	V	DC Control: 4 - 32VDC
Control current	mA	< 20mA (voltage dependent - see Fig. 2)
Turn-on voltage (min)	V _{min}	DC Control: 3.5VDC
Turn-on voltage (max)	V _{max}	DC Control: 35VDC
Turn-off voltage	V	DC Control: 2VDC

Insulation

Insulation resistance	≤ 500MΩ at 500VDC, 50%RH	
Dielectric strength	V AC	≥ 2500V

General Data

Operating time (typical)	mS	Approximately 1/2 cycle of load frequency + ≤1ms
Release time (typical)	mS	Approximately 1/2 cycle of load frequency + ≤1ms
Dimensions	L x W x H	100 x 24 x 107mm
Weight	approx. 228g	
Ambient temperature	storage	-30 to 100°C (No icing or condensation)
	operating	-30 to 80°C (with derating). (No icing or condensation)
Relative Humidity	45 - 85% RH	

SDA1 - 10, - 15

DIN rail 10A & 15A solid-state relays



Ordering Code

S D A 1 Z - 10 K - D

Switch Function

- Z - Zero Crossover
- R - Random

Load Current Rating

- 10 - 10A
- 15 - 15A

Load Voltage




- K - 40 to 480VAC

Control Voltage Input

- D - 4 to 32VDC

Dimensions


Fig. 1

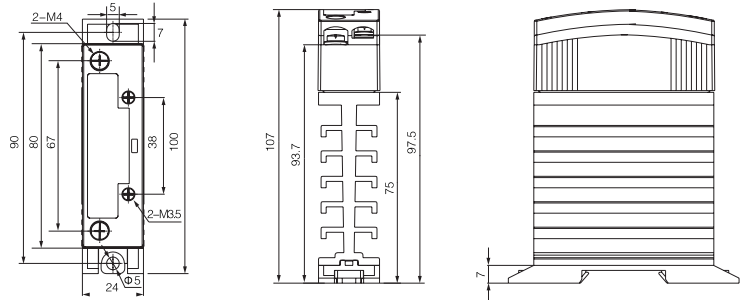


Dimensions in mm

Fig. 2


Input Current v. Control Voltage: 4 ~ 32VDC

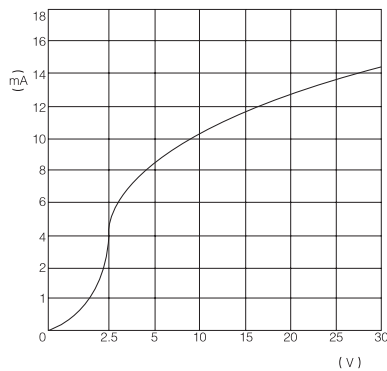

Load Current Derating v. Ambient Temperature

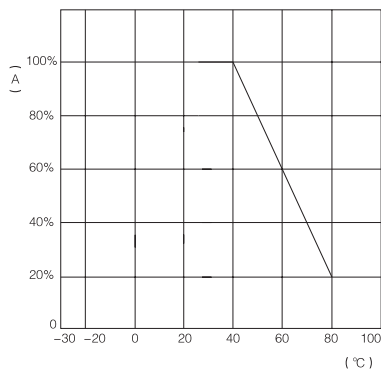

Load Output v. Input Control Action (Zero X-over)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Durakool](#) manufacturer:

Other Similar products are found below :

[DG85B-8011-35-1012](#) [SDA3Z-30K-A 4859](#) [DFC3-301](#) [DM84-2012-35-1012](#) [SDA1Z-40K-D](#) [DM85-2011-35-1012](#) [SRA3Z-60K-D](#) [DHS01](#)
[SDA1Z-15K-D](#) [SDA1Z-80K-A](#) [SDA1Z-80K-D](#) [SRA1Z-25K-D](#) [SDA3Z-30K-D](#) [DM84-2012-35-5012](#) [SRA3Z-80K-D](#) [DHS02](#) [SRA1Z-10K-](#)
[D](#) [SRA3Z-60K-A](#) [SRA1Z-40K-D](#) [A1/2-001](#) [SRA1Z-60K-A](#) [SRA1Z-40K-A](#) [SIM212-12VDC](#) [SRA1Z-10K-A](#) [A1B-003](#) [DG85B-](#)
[8021-96-1012-M1](#) [DM84-2012-35-1024](#) [DG85C-8021-75-1012](#) [SRA1Z-25K-A](#) [DG20-8011-35-1012](#) [SRA1Z-60K-D](#) [SRA1Z-100K-A](#) [5002](#)
[SRA2Z-40K-D](#) [SRA1Z-40L-A](#) [SRD-SGR2-M03](#) [DG85CM-5021-76-1012](#) [SRA1Z-15L-D](#) [DG85B-8011-96-1012-M1](#) [SIM112 16VDC](#)
[SRA1Z-80K-A](#) [SRA1Z-25L-A](#) [DTP1](#) [SRA1Z-100K-D](#) [SRA1Z-15L-A](#) [SRA1Z-100L-D](#) [SRA1Z-25L-D](#) [SRA1Z-40L-D](#) [SRA1Z-60L-A](#)