


DVI to HDMI Audio Video Adapters

pro-SIGNAL



RoHS
Compliant

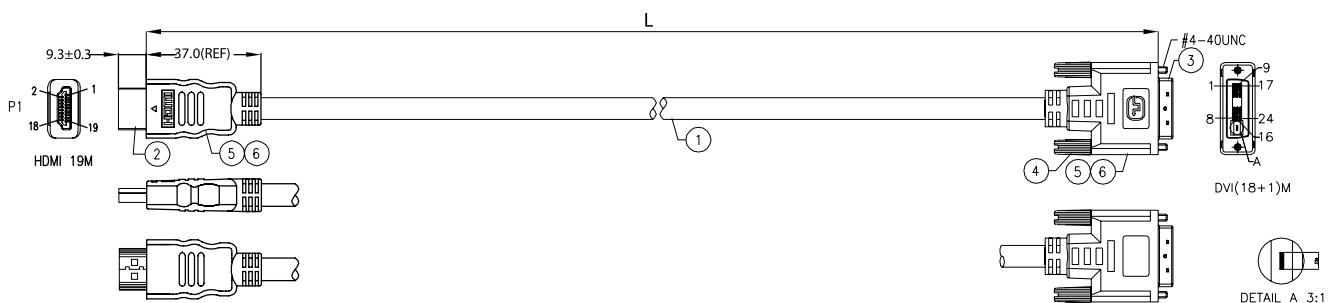

PIN ASSIGNMENT

P1	WIRE TYPE	P2	SIGNAL
PIN3	[Crossed lines]	PIN1	TMDS DATA 2-
PIN1		PIN2	TMDS DATA 2+
PIN2	[Crossed lines]	PIN3	TMDS SHIELD
PIN6		PIN9	TMDS DATA 1-
PIN4	[Crossed lines]	PIN10	TMDS DATA 1+
PIN5		PIN11	TMDS SHIELD
PIN9	[Crossed lines]	PIN17	TMDS DATA 0-
PIN7		PIN18	TMDS DATA 0+
PIN8	[Crossed lines]	PIN19	TMDS SHIELD
PIN12		PIN24	TMDS CLOCK-
PIN10	[Crossed lines]	PIN23	TMDS CLOCK+
PIN11		PIN22	TMDS SHIELD
PIN18		PIN14	+5V POWER
PIN17		PIN15	GROUND
PIN15	[Crossed lines]	PIN6	SCL
PIN16		PIN7	SDA
PIN19		PIN16	HOT PLUG DETECT
SHELL		SHELL	GND

Part Number	"L"
PS000031	1000mm ±30mm
PS000032	2000mm ±50mm

Dimensions : Millimetres

No	Part Name	Description	Qty.	Units
1	Cable	DVI cable UL20276 (28# 1P+D+AL/MYLAR)×4+28#×1P+28#×4C+AB(85%AL) Black PVC OD: 7.3mm	A/R	M
2	Conn	HDMI 19P Conn Male Black Plating G/F Shell Plating-Ni	1	Pcs
3	Conn	DVI 18+1 Conn Male Black Plating G/F Shell Plating-Ni	1	
4	Screw	DVI Screw #4-40UNC Ni-Plated OD: 2.8 L: 32.3 Black ABS	2	kg
5	In Mold	LD-PE	A/R	
6	Over Mold	PVC 70P Black UL94V-0		

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-SIGNAL

DVI to HDMI

Audio Video Adapters

pro-SIGNAL

Note

1. Open/short/intermittence 100% test.
2. Dielectric strength: 200V AC/0.02S, 2mA Max.
3. Insulation resistance: 300V DC/0.02S, 10MΩ Min.
4. Conductive Resistance: 5Ω Max.

Part Number Table

Description	Part Number
HDMI A MALE to DVI (18+1) Male Cable Assembly, 1m	PS000031
HDMI A MALE to DVI (18+1) Male Cable Assembly, 2m	PS000032

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-SIGNAL

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Signal](#) manufacturer.

Other Similar products are found below :

[11998795](#) [11998870](#) [11998871](#) [11W3S61106IN](#) [1260B](#) [2413485](#) [2413486](#) [2415620](#)
[2415621](#) [2415622](#) [2415623](#) [2415624](#) [2415625](#) [2415626](#) [2415627](#) [2415628](#) [271450](#)
[275915](#) [277942](#) [278076](#) [278155](#) [278159](#) [278160](#) [278162](#) [278174](#)