

# SECO-LARM®

## SM-205Q (MINIATURE MOUNT)



49J5  
BP3821

**ALARM CIRCUIT:** For closed circuit (CC) systems only.

**CONTACT TYPE:** SPST, gold under-plating with DEACTIVATED RHODIUM outer-plating (**SECO-LARM** contacts have a unique RHODIUM plating that have gone through a special oxygen treatment to DEACTIVATE the surface and thus eliminate absorption of organic impurities, polymer growth during operation, as well as the possibility of contact freezing).

**SWITCH CYCLES:** 50 million.

**OPERATION GAP:** 3/4 inch.

**APPLICATIONS:** Great for protecting sliding doors and windows where space is a problem. Miniature size assures ease of concealment.

Mount by using self-adhesive backing or screws – whichever is necessary and more convenient. For mounting on steel doors, windows, etc., use of a spacer or stronger magnet may be necessary. Contact **SECO-LARM** or your local distributor for more information.

**COLORS:** White, mahogany brown, grey (specify).


**CASE CONSTRUCTION:** Weatherproof, high-impact ABS plastic with self-adhesive backing.

**MAGNET:** Alnico.

**LEADS:** Pre-wired 15", #22.

**RATING:** 0.1Amp./100VDC (max.)  
1Amp./10VDC (max.)  
10W (max.)

**TEMPERATURE:** -15°F to 160°F (-25°C to 70°C).

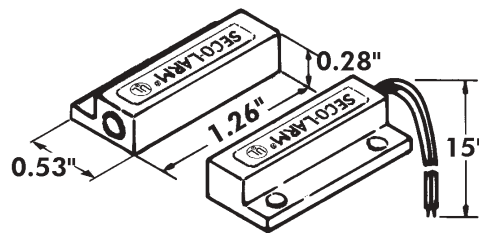

Note: Products with model number that ends with "Q" or have a round green "Q" sticker represents RoHS compliant products.

PRODUCT INFO.

SM-205Q  
(MINIATURE MOUNT)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SECO-LARM](#) manufacturer:*

Other Similar products are found below :

[SS-090-2H1](#) [ST-2406-5A](#) [SL-1301-BAQ/C](#) [SA-027WQ](#) [SD-7202GC-PT](#) [SL-1301-BAQ/B](#) [SM-4105-LQ/B](#) [82-12781](#) [E-936-S45RRGQ](#) [SM-4103-TQ/W](#) [E-941SA-1200](#) [SD-7201GCPE1Q](#) [SK-990AQ](#) [SS-090-2H0](#) [SM-226R-3Q](#) [SD-7202GC-PEQ](#) [E-941SA-300RQ](#) [SM-4104-TQ/W](#) [SM-205Q/BR](#) [SR-1212-C2ALQ](#) [SM-4601-LQ](#) [SA-025Q](#) [SL-126Q/C](#) [SM-200Q/BR](#) [CA-1615-06LQ](#) [SS-074Q/BG](#) [CA-1515Q](#) [SM-4201-LQ](#) [SK-91ERSD](#) [SM-4303-TQ/W](#) [SK-1011-SDQ](#) [SM-216Q/GY](#) [NE-SE01-020Q](#) [CA-1610-3FLQ](#) [NJ-P101M-PQ](#) [SM-226RQ](#) [SS-073Q](#) [SL-126Q/R](#) [SL-126Q/A](#) [SL-1312-SA/R](#) [SL-126Q/B](#) [SM-204Q/W](#) [SM-207-5Q/BR](#) [SM-4102-TQ/W](#) [SM-4301-TQW](#) [CA-1616Q](#) [SM-4601-L3Q](#) [SL-1301-BAQ/R](#) [SM-226LQ](#) [SM-226L-3Q](#)