

Capsule-Type Surface-Mount Contacts

SM-4004-TQ/W

1" Gap, N.C., Quick-Connect, White

SM-4004-LQ/W

¾" Gap, N.C., 18" Wire Leads, White

Features:

- Miniature capsule-type surface-mount magnetic contacts
- Gold-plated external screw terminals for longer life and reliability with tape to cover terminals (SM-4004-TQ only)
- 18" Wire leads (SM-4004-LQ only)
- Adhesive mounting (double sided tape included)
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness, which results in higher handling power and long life (SM-4004-TQ), or ruthenium on gold under plating, which results in a long life (SM-4004-LQ)
- 1" (25mm) Gap (SM-4004-TQ)
- ¾" (19mm) Gap (SM-4004-LQ)
- For N.C. circuits
- Lifetime limited warranty



SM-4004-TQ/W



SM-4004-LQ/W



Long-Life Contacts

Rare-Earth Magnet


18" Leads or Quick-Connect

Miniature Capsule-Type

Specifications:

Model number	SM-4004-TQ/W	SM-4004-LQ/W
Circuit type	N.C.	
Operation Gap	1" (25mm)	¾" (19mm)
Terminals	Gold-plated quick-connect	18" wire leads
Color	White	
Material	High-impact ABS plastic	
Contacts	Iridium plating	Ruthenium on gold underplating
Contact rating	0.1A@100VDC (max)	
	1.0A@10VDC (max)	
	10W (max)	
Temperature	-68°~158°F (-20°~70°C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	1"x3/8"x1/4" (25x10x7mm)	
Magnet dimensions	1"x3/8"x1/4" (25x10x7mm)	
Magnet type	Rare-earth neodymium	

Dimensions:

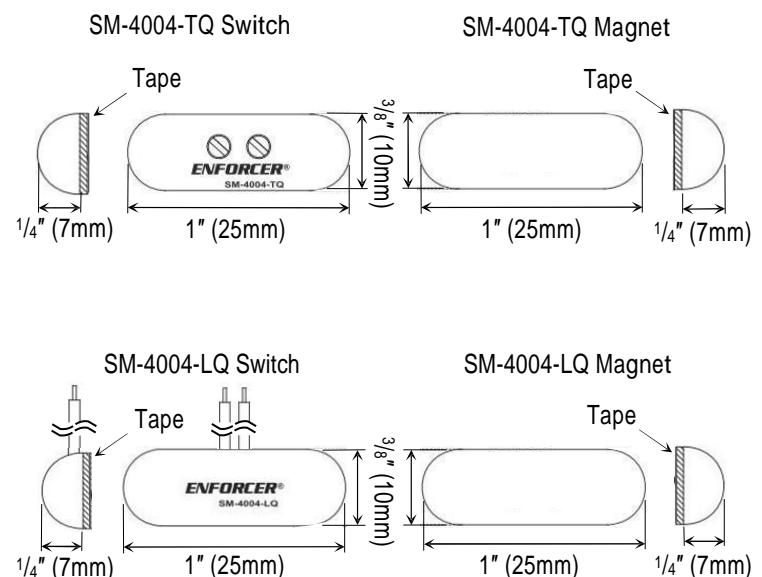

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiSM-4004-TQ_150320.docx

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SECO-LARM](#) manufacturer:

Other Similar products are found below :

[SS-090-2H1](#) [ST-2406-5A](#) [SL-1301-BAQ/C](#) [SA-027WQ](#) [SD-7202GC-PT](#) [SL-1301-BAQ/B](#) [SM-4105-LQ/B](#) [82-12781](#) [E-936-S45RRGQ](#) [SM-4103-TQ/W](#) [E-941SA-1200](#) [SD-7201GCPE1Q](#) [SK-990AQ](#) [SS-090-2H0](#) [SM-226R-3Q](#) [SD-7202GC-PEQ](#) [E-941SA-300RQ](#) [SM-4104-TQ/W](#) [SM-205Q/BR](#) [SR-1212-C2ALQ](#) [SM-4601-LQ](#) [SA-025Q](#) [SL-126Q/C](#) [SM-200Q/BR](#) [CA-1615-06LQ](#) [SS-074Q/BG](#) [CA-1515Q](#) [SM-4201-LQ](#) [SK-91ERSD](#) [SM-4303-TQ/W](#) [SK-1011-SDQ](#) [SM-216Q/GY](#) [NE-SE01-020Q](#) [CA-1610-3FLQ](#) [NJ-P101M-PQ](#) [SM-226RQ](#) [SS-073Q](#) [SL-126Q/R](#) [SL-126Q/A](#) [SL-1312-SA/R](#) [SL-126Q/B](#) [SM-204Q/W](#) [SM-207-5Q/BR](#) [SM-4102-TQ/W](#) [SM-4301-TQW](#) [CA-1616Q](#) [SM-4601-L3Q](#) [SL-1301-BAQ/R](#) [SM-226LQ](#) [SM-226L-3Q](#)