### George Risk Industries


(800) 523-1227

Home Products About GRI Contact GRI Where to Buy Testimonials What's New!

#### 50R Series 1/4" Recessed Switch Sets



**50R-12** 1/4" Recessed Switch Set




- Colors: White, Brown or Gray
- UL and ULC Approved
- Available in Closed Loop, Open Loop or SPDT
- Flange Available
- Standard 12" Leads
- Longer Leads or Zip Cord Available on Request
- Built-in E.O.L Resistors and Diodes Available on Request
- Switches or Magnets are Available Separately
- Supervisory Loops Available
- Standard Gap 1/2"+
- Wide Gap 1"+



1/4" Recessed Switch Set

The 50R and 50RF Series are 1/4" diameter switch sets designed for applications where a small diameter recessed switch set is required. This makes the set desirable in residential installations where no sign of an alarm system should be seen or where there is not room to install a larger diameter switch set. The 50R-12 is a straight cylindrical set for flush or counter sunk installations. The 50RF-12 set is flanged to prevent inadvertent pulling of the switch into the wall.



**50RF-12** 1/4" Recessed Switch Set

#### **Product Specification PDF's**





50R-12, 50RF-12 Series 1/4" Recessed Switch Set Product Specification PDF



N50R-12, N50RF-12 Series 1/4" Recessed Switch Set Product Specification PDF

[Home] [Products] [What's New!] [Security Products] [Data Entry Peripherals] [Pushbutton Switches] [Custom Engraved Keycaps] [Proximity Sensors] [Contact GRI] [About GRI]

#### Can't find what you are looking for?

Revised: Friday, September 13, 2013

Web design by The Computer Guy Copyright © 1997-2013

# MINIATURE 1/4" RECESSED SWITCH SET



### **50R & 50RF SERIES (1) (6)**

- ◆ Ideally Suited For Residential and Light Commercial Applications Where Aesthetics Are A Requirement
  - ◆ Recessed Magnetic Contact ◆ Press To Fit or Flanged Styles
    - ◆ 12" #22 AWG Leads
    - ◆ Longer Leads, Zip Cord or Jacketed Cable Upon Request
- ◆ Hermetically Sealed ◆ Plated Contacts Resist Sticking or Freezing
  - ◆ Built-in E.O.L. Resistors In Some Models Upon Request
    - ◆ Supervisory Loops In Some Models
    - Switches and Magnets Available Separately
    - ◆ Colors: White, Brown, Gray ◆ Lifetime Warranty



PART NUMBERS:			
Standard Gap 1/2"+	Closed Loop	<b>Open Loop</b>	<b>SPDT</b>
	50R-12	60R-12	70R-12
	50RF-12	60RF-12	70RF-12
Wide Gap 3/4"+	50R-12WG	60R-12WG	70R-12WG
	50RF-12WG	60RF-12WG	70RF-12WG






# MINIATURE 1/4" RECESSED SWITCH SET

#### **INSTALLATION APPLICATIONS:**

The 50R and 50RF series are 1/4" diameter switch sets designed for applications where a small diameter recessed switch set is required. This makes the set desirable in residential installations where no sign of an alarm system should be seen or where there is not room to install a larger diameter recessed switch set. The 50R-12 is a straight cylindrical set for flush or counter sunk installations. The 50RF-12 set is flanged to prevent inadvertent pulling of the switch into the wall.

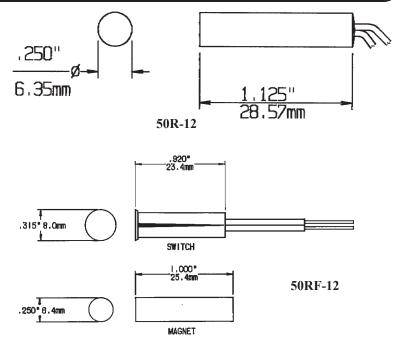

#### GRI products meet or exceed these minimum general specifications:

om produc.	is infect of our	coou incoo in	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Somerur opcomou.	iioiio.		
PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC)	MAXIMUM SWITCHING CURRENT (A)
50R-12	Closed	N/O	Α	.150	10	200	.500
50R-12WG	Closed	N/O	А	.150	10	200	.500
50RF-12	Closed	N/O	Α	.150	10	200	.500
50RF-12WG	Closed	N/O	Α	.150	10	200	.500
60R-12	Open	N/C	В	.140	5	175VDC	.250
60R-12WG	Open	N/C	В	.140	5	175VDC	.250
60RF-12	Open	N/C	В	.140	5	175VDC	.250
60RF-12WG	Open	N/C	В	.140	5	175VDC	.250
70R-12	Open/Closed	SPDT	С	.140	5	175VDC	.250
70R-12WG	Open/Closed	SPDT	С	.140	5	175VDC	.250
70RF-12	Open/Closed	SPDT	С	.140	5	175VDC	.250
70RF-12WG	Open/Closed	SPDT	С	.140	5	175VDC	.250

#### **WARRANTY:**

Lifetime warranty against workmanship, material and factory defects.

#### CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGE RISK INDUSTRIES, INC. G.R.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218

TOLL-FREE 1-800-523-1227

(308) 235-4645 FAX (308) 235-3561

## N SERIES SWITCH SETS



- ◆ Rare Earth Magnets Paired With Press To Fit Contacts
- ◆ Solves Problem Installs ◆ Time Saving Installations
- ◆ Nickel Plated To Protect From Chipping And Corrosion
- ◆ Use MM-600 With A Standard Gap Switch To Attain Wide Gap







**N2020-TWG** 



G.R.I.'s "Mighty Mag" contacts will assist in resolving the installer's problem of drilling into the new thinner vinyl windows. These rare earth magnets are less than 1/8" high and install fast and easily without worry about damage to the window itself. (Please see the Mighty Mag page in the accessories section of G.R.I.'s full line catalog for dimensions).

G.R.I.'s Mighty Magnets make use of a rare earth alloy which allows the size of the magnet to be significantly reduced while still retaining or improving the gap involved. These rare earth magnets can be mounted with the stainless steel mounting screws provided (MM-400 and MM-600) and/or double stick tape included in the bag, or may be glued into place.

**Note**: G.R.I. suggests using a silicone or clear nail polish sealant on the surface of installed rare earth magnets to prevent corrosion.

<b>PART</b>	NUI	MBERS:
-------------	-----	--------

N120T-12 N120T-12WG N150-12 N150-12WG N2020-12	N2020-TWG N20RS-12 N20RS-12WG N20RS-T N20RS-TWG	N2120-12WG N4473 N4473WG N50R-12 N50R-12WG	N50RF-12WG N50RS-12 N50RS-12WG N5065
N2020-12WG	N2120-12	N50RF-12	

Other 30% tolk combinations including Open Loop and S.P.D.T. available or as Switch Only and Magnet Only.

MADE IN U.S.A.

TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227

(308) 235-4645 FAX (308) 235-3561




# SWITCHES WITH RARE EARTH MAGNETS

#### Pair Switch with Magnet to get the following gaps:

		MM-25					
Switch	Description	MMR-25	MM-375	MM-10	MM-400	MM-600	MMF-875
S120T-12	3/4" Press Fit/Leads	3/8"+	1"+	Up to 1"	Up to 3/4"	1"+	3/4"+
S150-12	1/2" Press Fit/Leads	1/2"+	1 1/2"+	Up to 1"	3/4"+	1 1/2"+	1"+
S2020-12	3/8" Press Fit/Leads	Up to 1/2"	1"+	Up to 1"	1"+	1"+	1"
S2020-T	3/8" Press Fit/Terminals	3/8"+	1"+	Up to 1"	Up to 3/4"	1"+	1/2"+
S20RS-12	3/8" Short Press Fit/Leads	Up to 3/8"	1"+	3/4"+	Up to 3/4"	Up to 1"	3/4"
S20RS-T	3/8" Short Press Fit/Terminals	3/8"+	1"+	3/4"+	Up to 3/4"	Up to 1"	3/4"
S2120-12	. 3/8" Ribbed Press Fit/Leads	5/8"+	1"+	Up to 1"	Up to 3/4"	1"+	3/4"+
S4473	3/4" Press Fit/Terminals	Up to 1/2"	1 1/4"+	Up to 1"	Up to 3/4"	1"+	3/4"+
S50R-12	1/4" Press Fit/Leads	Up to 1/2"	Up to 1 1/2"	1"+	3/4"+	Up to 1 1/4"	3/4"+
S50RF-12	.1/4" Press Fit/Flanged/Leads	Up to 1/2"	Up to 1 1/2"	1"+	Up to 3/4"	Up to 1 1/4"	1"
S50RS-12	1/4" Short Press Fit/Leads	Up to 3/8"	1"+	3/4"+	Up to 1/2"	Up to 1 1/4"	3/4"
S5065	3/8" Press Fit/Leads	1/2"+	1"+	1"+	Up to 1"	Up to 1 1/4"	1/2"+

Magnet orientation will affect operation of switch. Please confirm operation prior to installation.

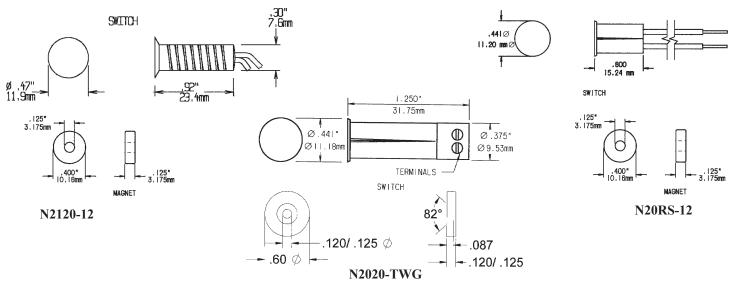

#### **WARRANTY:**

Lifetime warranty against workmanship, material and factory defects.

#### CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGE RISK INDUSTRIES, INC. G.R.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for george risk industries manufacturer:

Other Similar products are found below:

<u>PB-2020-W 110-T-W 28AWG-W 100-TWG-W 50R-12WG-W 4460A 55F-12WG-BA-W 180-12-W 29A-W 2020-12-W 4532 DS-03 RB-01-W N2020-T-W 100-12 100-T-W 100-12WG-W PBF-2020-W</u>