



AC Mains Powered Meter

For measuring volts, amps or frequency

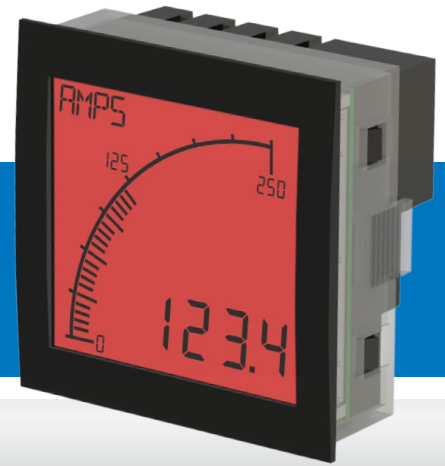

Advanced Panel Meter (APM)

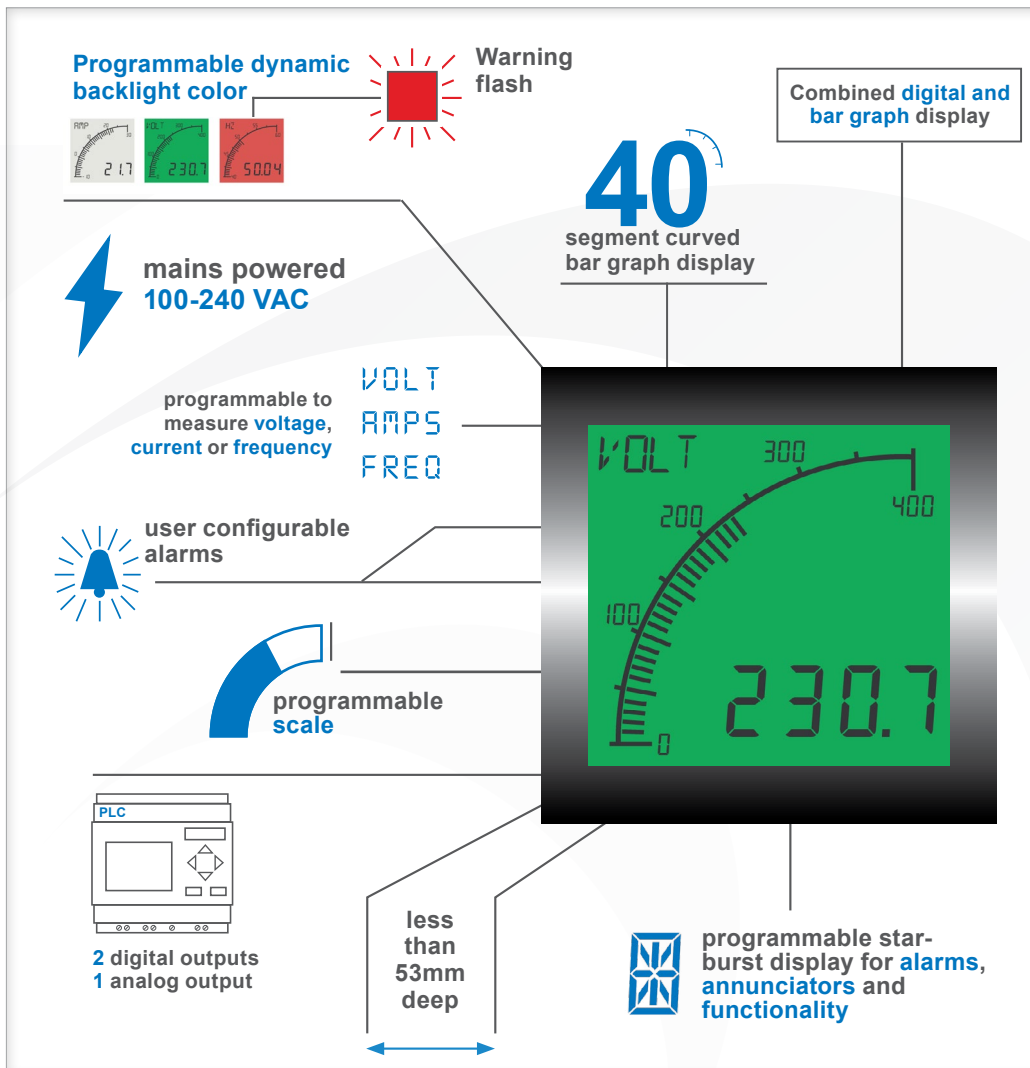

Overview

Measurement:

- Volts: 0-600 AC or DC
- Amps: 0-5A Direct
0-10,000A via CT
- Frequency: 2Hz-400Hz

Outputs:

- 2x digital open collector
- 1x analogue 4-20mA

Input Power

- 100-240VAC

Configuration:

- PC Application via USB

Display Options:

- Positive LCD
- Negative LCD



Key Features

- Mains powered 100-240VAC - no additional power supply needed.
- User configurable to measure voltage, current or frequency via APM application.
- User-programmable bar graph and alarms to immediately alert operators when a parameter is out of range.
- 4 character messaging area displays custom messages, alarms and annunciators.
- Interface to other equipment using digital and analogue outputs.
- Two LCD options: Positive (as shown) for use in bright conditions or Negative for use in darker environments.

Go to www.truAPM.com for further information

Specifications

POWER SUPPLY

Input	100 - 240VAC
Max Power	1.6W
Supply Frequency	47-63Hz

ENVIRONMENTAL

Temperature - operating	-10 to +60°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	IP65, NEMA type 4 and NEMA type 12

DISPLAY

User Configurable Backlight Colours	Red, Green, White
-------------------------------------	-------------------

ANALOGUE OUTPUT

Output	4-20 mA
Accuracy	0.50 %
Resolution	0.02 mA

OPEN COLLECTOR OUTPUTS


Max voltage (open collector outputs)	34 VDC
Max current (open collector outputs)	500 mA

CERTIFICATION

	CE, RoHS, UL
--	--------------

MECHANICAL

Dimensions	72mm x 72mm x 53mm [2.83" x 2.83" x 2.09"]
Cutout	68mm x 68mm [2.68" x 2.63"]
Connection Type	Screw Terminals
Wire Gauge	0.8mm ² - 3.3mm ² (18AWG to 12AWG)
Weight	180 grams

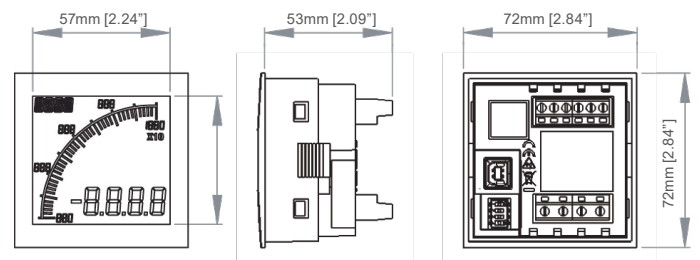

Part Numbers

APM-M2-APO	APM MAINS M2 100-240VAC Positive LCD
APM-M2-ANO	APM MAINS M2 100-240VAC Negative LCD
022128-01	USB Cable



Trumeter (Europe)
 Pilot Mill
 Alfred Street
 Bury,
 BL9 9EF
 Tel: +44 161 674 0960
 Email: sales.uk@trumeter.com

Trumeter (The Americas)
 702 S. Military Trail
 Deerfield Beach, Florida
 FL 33442,
 USA
 Tel: +1 954 725 6699
 Email: sales.usa@trumeter.com

Innovative Design Technologies Sdn. Bhd
 Lot 5881, Lorong Iks Bukit Minyak 1
 Taman Perindustrian Iks, 14000 Bukit Tengah
 Penang, Malaysia
 Web: www.idtworld.com
 Tel: + 604 5015700
 Email: sales.my@idtworld.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [trumeter](#) manufacturer:

Other Similar products are found below :

[APM-CT-ANO](#) [APM-M2-ANO](#) [RV2-4916B](#) [APM-AMP-APO](#) [HED251-T](#) [RV8-4916](#) [APM-VOLT-ANN](#) [APM-SHUNT-ANO](#) [APM-AMP-ANO](#) [APM-VOLT-ANO](#) [APM-CT-APO](#) [APM-M2-APO](#) [RV2-4916](#) [APM-AMP-ANN](#) [7016](#) [APM-AMP-APN](#) [APM-VOLT-APN](#) [P2-4916](#)
[KAL-D06](#)