



ECO Halogen 240W LINEAR



Product Overview

Main voltage halogen lamps operate direct from the mains, without the need for a transformer, and can be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

Features

- More eco-valued.
- Excellent color rendering and consistency
- Reliable construction

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a glass product, handle with care

Specifications –R7s

SKU	S5416 S5162
Lamp	R7s
Nominal Power (W)	240
Voltage	220-240Vac 50Hz
Current (mA)	
Nominal Luminous Flux (lm)	4900
CCT (K)	2900K warm White
Nominal Lifetime (h)	2000
Dimmable	Yes
Switching Cycles	8000
Warm-up time to 60% (S)	instant
Length (mm)	118
Diameter (mm)	8
Mercury (mg)	0
Clean-up instructions	See website
Retrofit Yes	
Equivalent Wattage (W)	300
Rated Power (W)	240
Rated Luminous Flux (lm)	4900
Rated Lifetime (h)	2000
Power Factor	1
Rated Peak Candelas (cd)	
Lumen Maintenance Factor at	
Nominal Lifetime	2000
CRI	>99
Start Time (s)	instant
Ambient Temperature Range (°C)	-20 to 40

Energy Label –R7s


Energy Class	C
Energy Consumption (kWh/1000h)	240.00 *

* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

Product Markings –R7s


Voltage	220-240Vac 50Hz
Nominal Power (W)	240
Current (mA)	
CE Mark	Yes
WEEE Mark	Yes
Batch Code	Yes

Dimensions

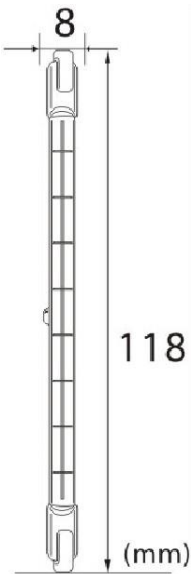

Photometric Information

2900K

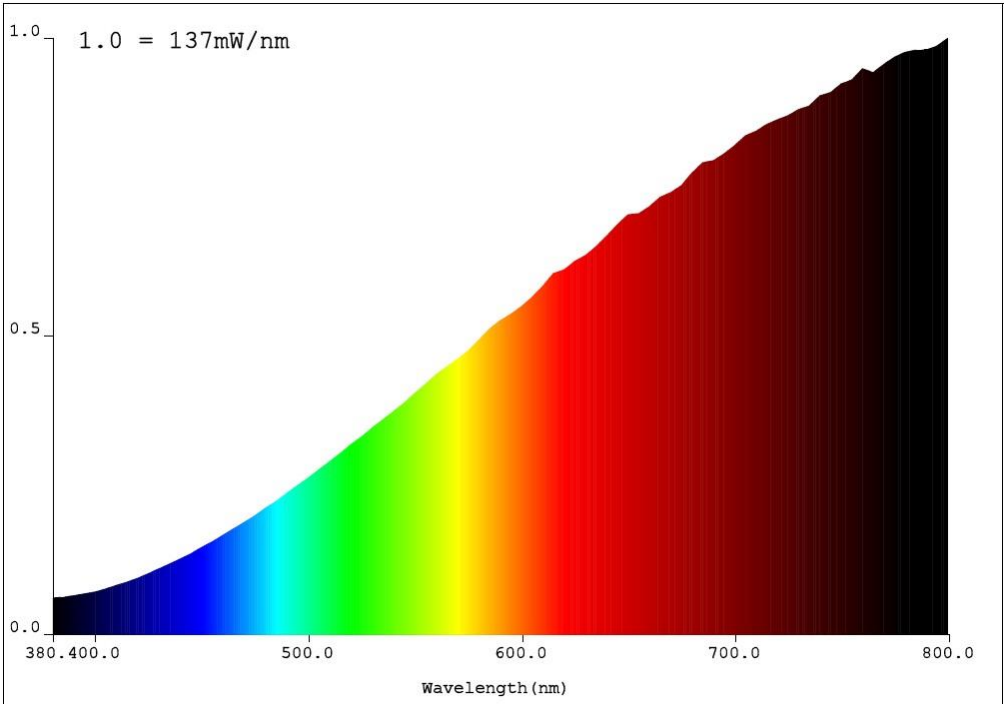

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [energizer manufacturer](#):

Other Similar products are found below :

[1215F2X3](#) [LR43 186](#) [AC13](#) [AC312](#) [AC675](#) [603298](#) [638006](#) [639830](#) [E300132000](#) [S9025](#) [7638900414660](#) [HARD CASE RECHARGEABLE](#) [HARD CASE PRO MULTI USE](#) [HCHD311](#) [S9029](#) [639826](#) [603386](#) [HARD CASE PROFF 4AA](#) [HARDCASE PRO HEADLIGHT](#) [639618](#) [RCLINM2WR](#) [S8865](#) [S8707](#) [S8100](#) [7638900424478](#) [7638900313130](#) [626177](#) [E300116200](#) [E300115900](#) [E300280600](#) [639838](#) [HARDCASE PRO WORK LIGHT](#) [603305](#) [METAL LED 6AA](#) [S8864](#) [HDD32E](#) [MS2AALED](#) [ENERGIZER® 2-IN-1 LANTERN HANDHELD](#) [E300124200](#) [E300171700](#) [ENFFL81E](#) [E300112600](#) [633474](#) [HDA32E](#) [7638900421422](#) [HARD CASE PRO PIVOT](#) [HCSP61E](#) [7638900424485](#) [HDC32E](#) [E300115800](#)