



SceneSwitch LED Lamps

LED Scene Switch 60W A60 B22 WW-CW FR ND 1BC/4

Some situations call for cool light, others benefit from the ambiance of a warm cosy glow. With Philips SceneSwitch LED lamps, you can have different light settings from just one bulb, candle or spot. And you don't need a dimmer! Optimise your lighting for relaxing, hobbies, recreation or working. Simply at the flick of a switch. And that's your existing switch! No extra installation is required.

Product data

| General Information | |
|---------------------------|---------------|
| Cap base | B22 [B22] |
| Bulb shape | A60 [A 60mm] |
| Nominal lifetime (nom.) | 15000 h |
| Switching cycle | 100000X |
| Technical type | 9.5-60W |
| Technical Type Setting(s) | 9.5-60 W |

| Light Technical | |
|---|-----------------|
| Luminous flux (nom.) | 806 lm |
| Luminous flux (rated) (nom.) | 806 lm |
| Colour designation | Warm white (WW) |
| Correlated Color Temperature Setting(s) | 2700/4000 K |
| Luminous efficacy (rated) (nom.) | 84.84 lm/W |
| Colour consistency | <6 |
| Color rendering index (nom.) | 80 |

| | |
|--|------|
| LLMF at end of nominal lifetime (nom.) | 70 % |
|--|------|

| Operating and Electrical | |
|----------------------------------|-----------|
| Input frequency | 50-60 Hz |
| Power (Rated) (Nom) | 9.5 W |
| Lamp current (nom.) | 100 mA |
| Wattage equivalent | 60 W |
| Starting time (nom.) | 0.5 s |
| Warm-up time to 60% light (nom.) | 0.5 s |
| Power factor (nom.) | 0.5 |
| Voltage (Nom) | 220-240 V |

| Controls and Dimming | |
|----------------------|----|
| Dimmable | No |

SceneSwitch LED Lamps

Mechanical and Housing

| | |
|-------------|--------------|
| Bulb finish | Frosted (FR) |
|-------------|--------------|

Approval and Application


| | |
|-------------------------------|---------|
| Energy-saving product | Yes |
| Suitable for accent lighting | No |
| Energy efficiency label (EEL) | A+ |
| Energy Consumption kWh/1000 h | 9.5 kWh |

Product Data

| | |
|-------------------|-----------------|
| Full product code | 871869659841200 |
|-------------------|-----------------|

| | |
|---------------------------------|--|
| Order product name | LED Scene Switch 60W A60 B22 WW-CW FR ND 1BC/4 |
| EAN/UPC – product | 8718696598412 |
| Order code | 59841200 |
| Numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 4 |
| Material no. (12NC) | 929001264201 |
| Net weight (piece) | 0.065 kg |

Dimensional drawing




SSW EMEA Color_9.5W 827-40 800lm B22 ND

| Product | D | C |
|--|-------|--------|
| LED Scene Switch 60W A60 B22 WW-CW FR ND 1BC/4 | 61 mm | 111 mm |

Photometric data

General Uniform Lighting

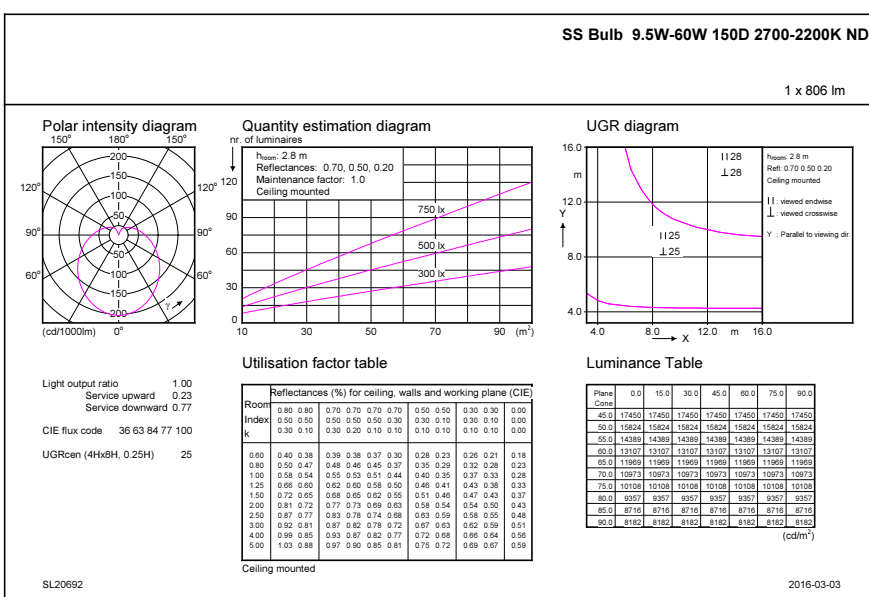

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [philips manufacturer](#):

Other Similar products are found below :

[996510062046](#) [P80CL31HFP](#) [P87C528EBBB](#) [P87C528EBPN](#) [SCC68070CDA84](#) [PL22V1015N](#) [440206F](#) [451877AB](#) [569054R](#)
[OM4151MAN](#) [P80C654FBP](#) [P87C528EBAA](#) [TDA2051H](#) [8718696522530](#) [8718696577790](#) [8718696598375](#) [DM4S6B00F/17](#) [45368100](#)
[PLC18V8Z35FA](#) [P80C528FBA](#) [P80C550EBAA](#) [PLC42VA12FA](#) [PLC42VA12N](#) [PLS179N](#) [NE5081N](#) [P80C528FBP](#) [P80C575EBPN](#)
[8718291787051](#) [45350600](#) [45362900](#) [996510053347](#) [22399](#) [2EMA00059B](#) [PCF80C65212WP](#) [PLS155N](#) [PLS173N](#) [BYV79200](#) [SAA5243](#)
[PLS167N](#) [PLUS173DN](#) [PLUS20L87N](#) [PLUS20R87N](#) [053684A](#) [SCC2691AC1N24](#) [P80C575EBAA](#) [TDA4850](#) [UBA2051C](#) [8718696454831](#)
[8718291787037](#) [929000863803](#)