


Product availability : Non-Stock - Not normally stocked in distribution facility

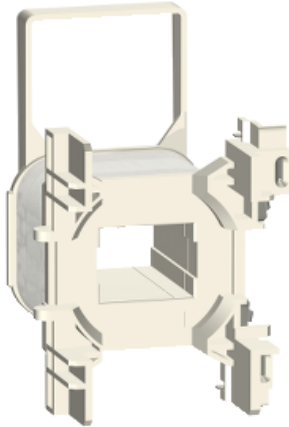

Main

Range of product	TeSys D
Range	TeSys
Product or component type	Contactor coil
Device short name	LXD3
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	42 V AC 50/60 Hz
Average resistance	6.18 Ohm at 68 °F (20 °C)
Inductance of closed circuit	0.37 H
Product compatibility	LC1D40A...D65A LC1DT80A LC1DT60A
Mechanical durability	6 Mcycles
Operating rate	3600 cyc/h at <= 140 °F (60 °C)

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 Uc at 140 °F (60 °C) drop-out 50/60 Hz 0.8...1.1 Uc at 140 °F (60 °C) operational 50 Hz 0.85...1.1 Uc at 140 °F (60 °C) operational 60 Hz
Inrush power in VA	160 VA at 68 °F (20 °C) (cos φ 0.75) 60 Hz 160 VA at 68 °F (20 °C) (cos φ 0.75) 50 Hz
Hold-in power consumption in VA	15 VA at 68 °F (20 °C) (cos φ 0.3) 50 Hz 15 VA at 68 °F (20 °C) (cos φ 0.3) 60 Hz
Heat dissipation	4...5 W at 50/60 Hz

Environment

Ambient air temperature for operation	23...140 °F (-5...60 °C)
Product weight	0.15 lb(US) (0.07 kg)

Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
----------	---------------------------------

Discount Schedule	I12
Nbr. of units in pkg.	1
Package weight(Lbs)	0.35000000000000003
Returnability	N
Country of origin	FR

Contractual warranty

Warranty period	18 months
-----------------	-----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [schneider manufacturer](#):

Other Similar products are found below :

[LU9M1](#) [7D](#) [7S](#) [7XA1](#) [FNQR2](#) [8501RS44V24](#) [8501RSD14P14V51](#) [8501XO20V03Y414](#) [9001KXRK](#) [9001SKR9P35RH25](#) [9001SKT35L31](#)
[9003K2C003GA](#) [9007AA1](#) [9007BA1](#) [9007C54D](#) [9007C62A2](#) [9007CA11](#) [9007FA3](#) [9007HA4](#) [9007HA6](#) [9007KA1](#) [9007KB11](#)
[9007MS01S0206](#) [9007MS02S0300](#) [9012GAR4](#) [9012GAW2](#) [9012GBW1](#) [9012GDW5E3](#) [9012GFW1](#) [9012GNG1](#) [9012GNG3](#) [9012GNG6](#)
[9013FHG39J69](#) [9013GHG2J30](#) [9050JCK2F30V14](#) [GV2P10](#) [GVAN20](#) [GZ1E02](#) [A9F04616](#) [ABL8RPS24030](#) [RMPT20BD](#) [ATS01N206QN](#)
[CAD32BD](#) [CAD32F7](#) [CAD50BD](#) [CAD50P7](#) [RSL1PRJU](#) [9001KA35](#) [9001KA3G](#) [9001KA4](#)