


# BRUSHLESS DC FANS

# F16EA

## FEATURES


- Ultra-compact / Low-profile model, that is ideal for compact electric instrument and local cooling
- Realization of high air flow and low noise by adoption of Meridian impeller which is highly effective and unique (Patent pending)
- Longer operating life by sealed bearing structure
- Light weight (Approx. 1.3 g)

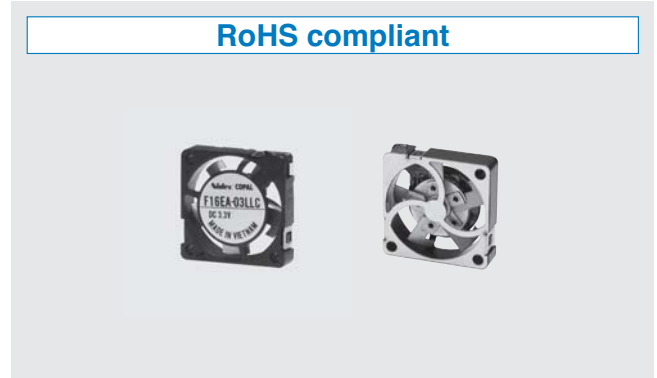

## STRUCTURE / MAIN MATERIAL

Component	Materials
Housing	Made of modified (LCP) reinforces
Cover	Made of modified (SUS) reinforces
Impeller	Made of modified (SUS) reinforces
Bearing	Sleeve bearing

## PART NUMBER DESIGNATION

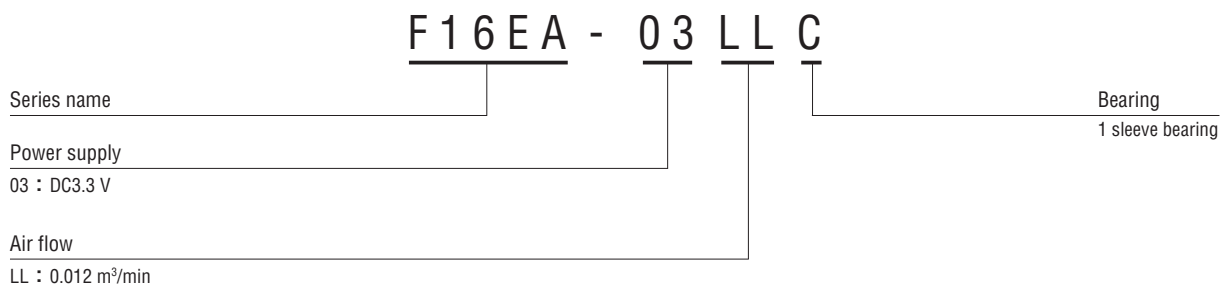

## LIST OF PART NUMBERS

Power supply	Part number
DC3.3 V	F16EA-03LLC

※ Verify the above part numbers when placing orders.

# F16EA


## BRUSHLESS DC FAN

### STANDARD SPECIFICATIONS

Item	F16EA-03LLC
Rated voltage	DC3.3 V
Voltage range	3.2 ~ 3.5 V
Rated current	0.02 A
Rotating speed	6500 min <sup>-1</sup>
Air flow	0.012 m <sup>3</sup> /min
Static pressure	4.7 Pa
Noise	3 dB (A)
Use environment	-10 ~ +60 °C (35 ~ 85 %RH)
Storage environment	-20 ~ +70 °C (35 ~ 85 %RH)
Net weight	Approx. 1.3 g

※The specifications above are typical values measured on the conditions of no-loading running with rated voltage in the circumstances of 25 °C ± 2 °C, 35~ 85 %RH. Please contact us if you would liketo check the specifications in different circumstances.


### AIR FLOW PERFORMANCE CURVES

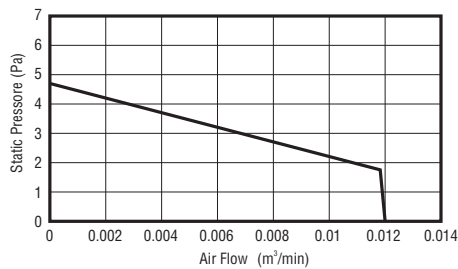

※ Data in our measuring instrument

### OUTLINE DIMENSIONS

(Unit: mm)

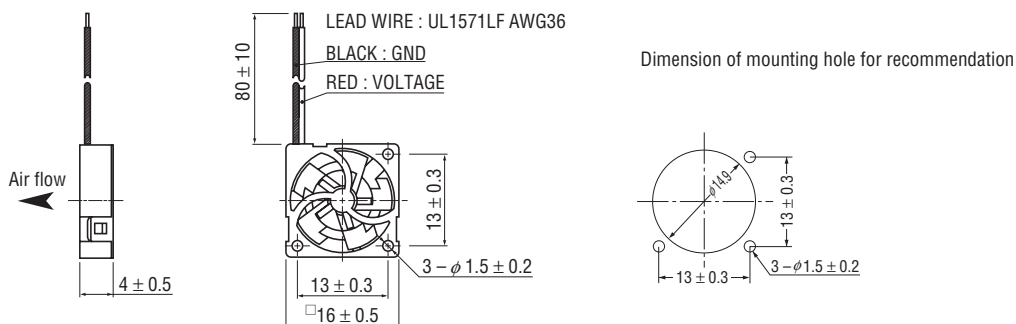

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [nidec copal](#) manufacturer:*

Other Similar products are found below :

[PG-35-103R-NR2](#) [PG-30-102R-N](#) [FPM-12](#) [PS60-102R-NMCN](#) [PS20-302R-PU](#) [CT-9EW103](#) [CAS-220A](#) [CJ25-42010](#) [PS83-102A](#) [PA-850-352G-NR2](#) [8C1011-Z](#) [PS6-102V-PAR](#) [PA-850-102V-NG2](#) [PG-35-102R-NVC](#) [PG-100-102GH](#) [PA-830-351A-VCR](#) [PA-878-203P-H-R2](#) [PG-35-102R-PR2](#) [ET310E12-Z](#) [S-1031A](#) [PS60-102R-PMCN](#) [CHS-10A](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100-102GP](#) [PS30-103R-N](#) [PA-20-302R-U-3M](#) [ST-32EA 10K ohm \(103\)](#) [PS40-103G-NAR](#) [PG-100-103GP](#) [PG-100-102RP](#) [PG-100B-102R-H](#) [PG-100B-103R](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-35-103R-NVC](#) [PA-800-102V-10](#) [PS83-102G](#) [PA-850-102A-NR2](#) [F251R-05LC](#) [PG-30-101R-P](#) [PA-20-302R-M-3M](#) [8A2012-Z](#) [PS30-102R-N](#) [MG16B-030-AB-00](#) [8F2011-Z](#) [CAS-D20A](#) [WL10-NF-2](#) [RE12D-100-201-1](#) [RE30E-400-213-1](#)