

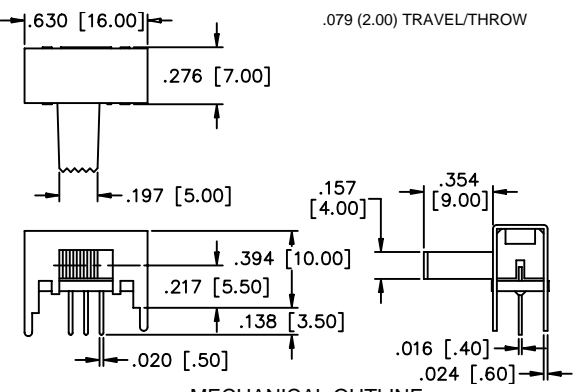
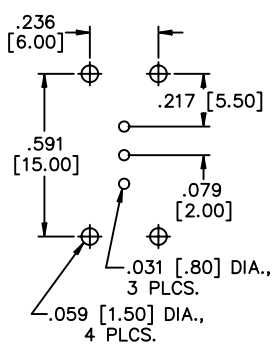


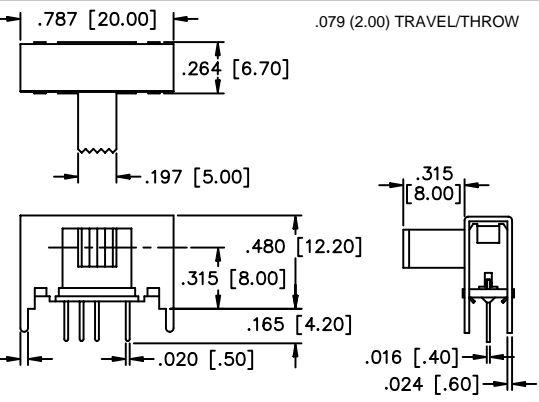
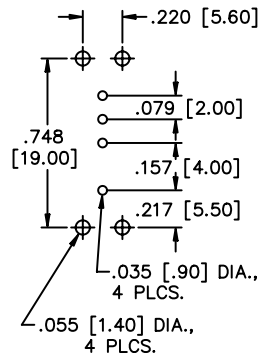


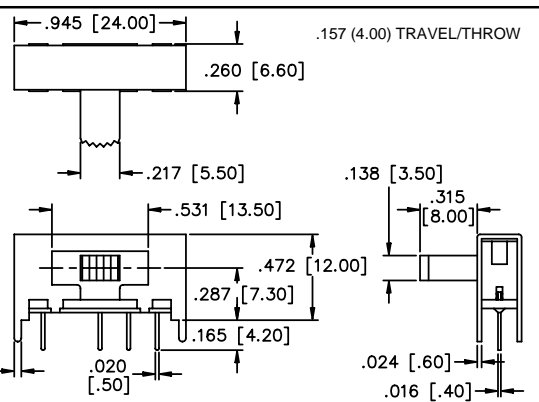
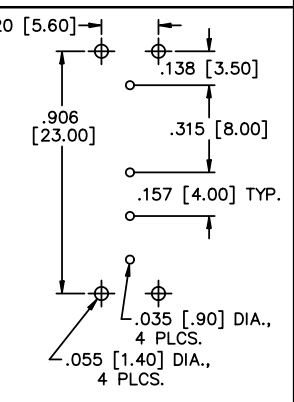


M Series

Standard Size Slide Switches



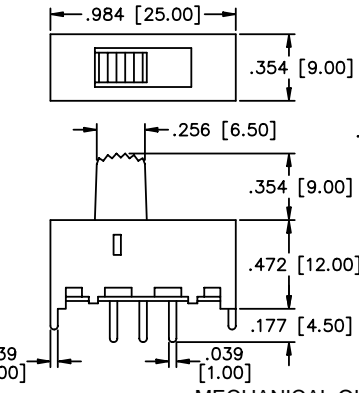
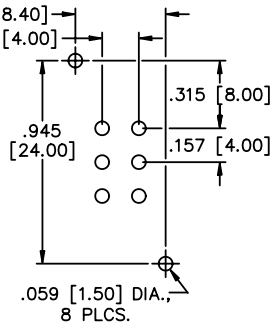
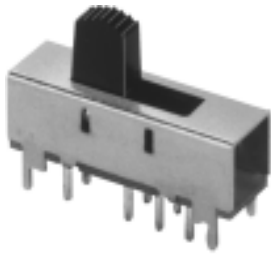

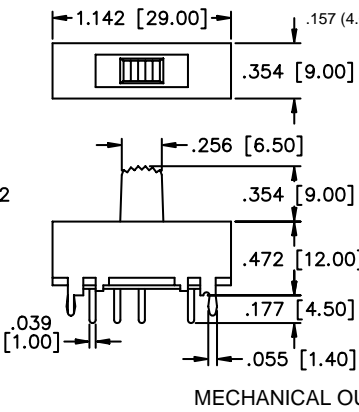
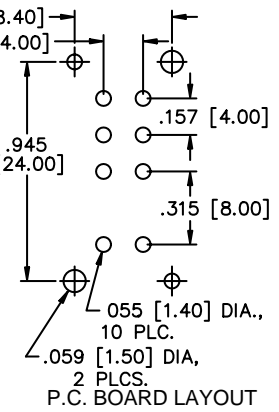


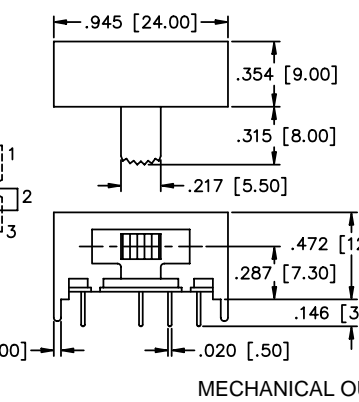
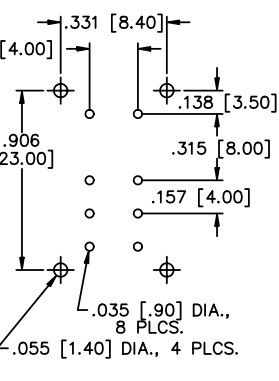
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
<p>Contact rating: 300 mA at 125 VAC or 30 VDC</p> <p>Initial contact resistance: 20 milliohms max.</p> <p>Insulation resistance: 100 megohms min. at 500 VDC</p> <p>Dielectric strength: 500 volts RMS at sea level</p> <p>Electrical life: 10,000 cycles min.</p> <p>Operating temperature range: -10°C to +60°C</p> <p>Solder heat resistance: 260°C max. for 3 seconds</p> <p>Solvent washing permissible</p>	<ul style="list-style-type: none"> ● Bifurcated wiping contact design. ● Epoxy sealed terminals. ● Wash-through open frame construction. ● Reinforcing mounting legs. ● Many actuator styles and lengths available on request.
	MATERIALS
	<p>Contacts & terminals: Silver plated</p> <p>Housing: Tin plated steel</p> <p>Actuator: Thermoplastic</p> <p>Base: Phenolic laminated sheet</p> <p style="text-align: right;">Terminal seal: Epoxy</p>

<p>MODEL NO.</p> <p>M12R</p>	 <p style="text-align: center;">RIGHT ANGLE ACTUATOR</p>	<p>1P2T</p> <p>Schematic: </p> <p>Mechanical Outline: </p> <p>P.C. Board Layout: </p>
<p>MODEL NO.</p> <p>M13R</p>	 <p style="text-align: center;">RIGHT ANGLE ACTUATOR</p>	<p>1P3T</p> <p>Schematic: </p> <p>Mechanical Outline: </p> <p>P.C. Board Layout: </p>
<p>MODEL NO.</p> <p>M13AR</p>	 <p style="text-align: center;">RIGHT ANGLE ACTUATOR</p>	<p>1P3T</p> <p>Schematic: </p> <p>Mechanical Outline: </p> <p>P.C. Board Layout: </p>

M Series

Standard Size Slide Switches

MODEL NO.			
M22			
 <p>VERTICAL ACTUATOR</p>	<p>2P2T</p>  <p>● = COMMON</p>	 <p>MECHANICAL OUTLINE</p>	 <p>P.C. BOARD LAYOUT</p>
M23			
 <p>VERTICAL ACTUATOR</p>	<p>2P3T</p>  <p>● = COMMON</p>	 <p>MECHANICAL OUTLINE</p>	 <p>P.C. BOARD LAYOUT</p>
MODEL NO.			
M23R			
 <p>RIGHT ANGLE ACTUATOR</p>	<p>2P3T</p>  <p>● = COMMON</p>	 <p>MECHANICAL OUTLINE</p>	 <p>P.C. BOARD LAYOUT</p>

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

M Series



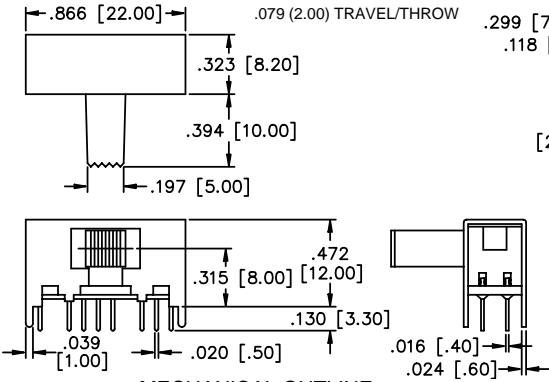
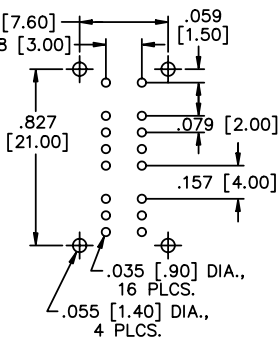


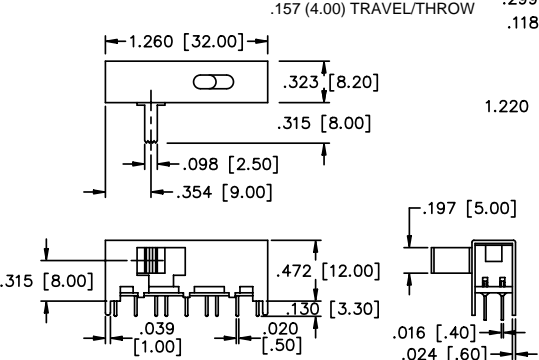
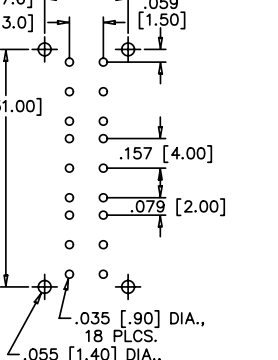


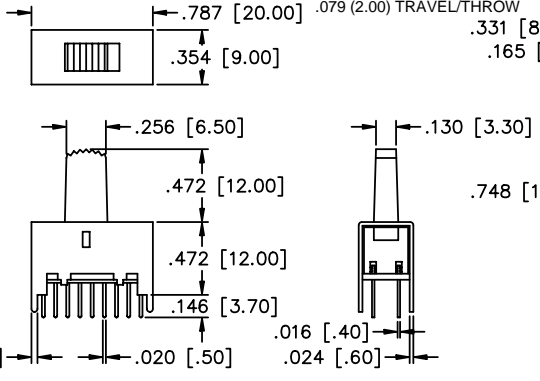
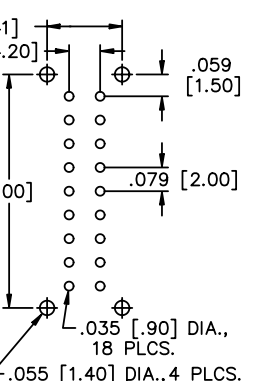
Standard Size Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. M42	4P2T	<p>● = COMMON</p>	<p>MECHANICAL OUTLINE</p>	<p>P.C. BOARD LAYOUT</p>
MODEL NO. M42R	4P2T	<p>● = COMMON</p>	<p>MECHANICAL OUTLINE</p>	<p>P.C. BOARD LAYOUT</p>
MODEL NO. M42A	4P2T	<p>● = COMMON</p>	<p>MECHANICAL OUTLINE</p>	<p>P.C. BOARD LAYOUT</p>
MODEL NO. M43	4P3T	<p>● = COMMON</p>	<p>MECHANICAL OUTLINE</p>	<p>P.C. BOARD LAYOUT</p>

M Series

Standard Size Slide Switches

MODEL NO. M43R	 <p style="text-align: center;">RIGHT ANGLE ACTUATOR</p>	<p style="text-align: center;">4P3T</p>  <p style="text-align: center;">SCHEMATIC</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p>  <p style="text-align: center;">P.C. BOARD LAYOUT</p>
MODEL NO. M62R	 <p style="text-align: center;">RIGHT ANGLE ACTUATOR</p>	<p style="text-align: center;">6P2T</p>  <p style="text-align: center;">SCHEMATIC</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p>  <p style="text-align: center;">P.C. BOARD LAYOUT</p>
MODEL NO. M62A	 <p style="text-align: center;">VERTICAL ACTUATOR</p>	<p style="text-align: center;">6P2T</p>  <p style="text-align: center;">SCHEMATIC</p>  <p style="text-align: center;">MECHANICAL OUTLINE</p>  <p style="text-align: center;">P.C. BOARD LAYOUT</p>

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [Apem](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [GH49WW00001](#) [1437576-8](#) [EPS1PC1](#) [1825074-1](#) [1825160-3](#)
[1825167-2](#) [25139NLDB](#) [25436NLDB](#) [25449NAH](#) [25536NA](#) [L101011ML04B](#) [SLB1240R45](#) [SLSA12004](#) [1825078-1](#) [1825080-4](#) [1825081-1](#)
[1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GF-124-0204](#) [GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#)
[CST91246FK](#) [TG36P000000](#) [TG36P000050](#) [47227LFE](#) [49331L](#) [MHSS1105A](#) [50208L](#) [HW4S-5LF22N3](#) [L202091MS02Q](#) [4-1437581-7](#)
[X2225CR-437W](#) [48BFSP3M2QT](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [TG39W000000](#) [1825075-1](#)