

Compact Digital Multimeters + NCV

- Built-in Non-contact Voltage Detector**
Non-contact Voltage Detector quickly checks for the presence of voltage from 100 to 600VAC

Features:


- 0.5% basic accuracy
- Over-sized high contrast LCD display
- Double molded housing
- CAT III-600V
- Complete with test leads, general purpose Type K bead wire probe (MN47), 9V battery, and carrying case

MN42:


- Manual ranging
- 2000 count display
- 1.5V and 9V Battery tests

MN47:

- Autoranging with manual override
- 4000 count display
- AC Current, Capacitance, Frequency, Temperature, and Duty Cycle
- Relative and Data Hold functions

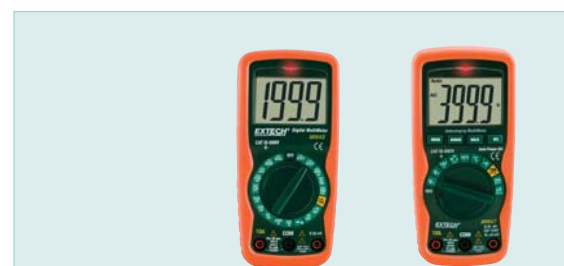

Specifications	MN42	MN47
Ranging	Manual	Autoranging
Display counts	2000	4000
Basic Accuracy	0.5%	0.5%
NC Voltage Detector	100 to 600VAC	100 to 600VAC
DC Voltage	600V (0.1mV)	600V (0.1mV)
AC Voltage	600V (0.1V)	600V (0.1mV)
DC Current	10A (1μA)	10A (0.1μA)
AC Current	—	10A (0.1μA)
Resistance	2MΩ (0.1Ω)	40MΩ (0.1Ω)
Capacitance	—	100μF (1pF)
Frequency	—	10MHz (0.001Hz)
Temperature	—	1400°F (760°C)
Duty Cycle	—	0.1 to 99.9%
Diode/Continuity	Yes	Yes
Battery Test	1.5V / 9V	—
Dimensions	5.9 x 2.75 x 1.8" (150 x 70 x 48mm)	
Weight	9oz (255g)	

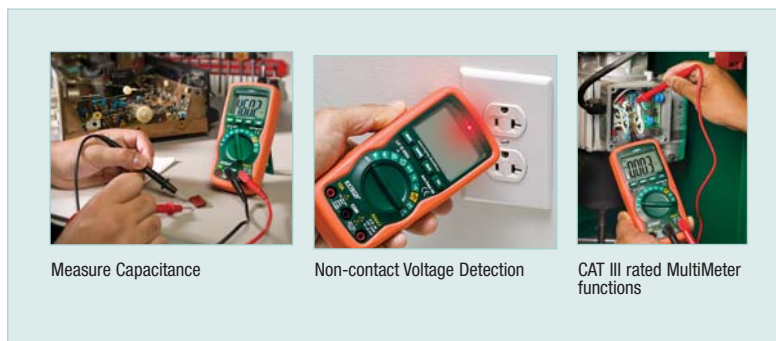

Measure Capacitance

Non-contact Voltage Detection

CAT III rated MultiMeter functions

Ordering Information:

- MN42Manual Ranging MultiMeter + Voltage Detector
MN47Autoranging MultiMeter with Temp + Voltage Detector

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Multimeters](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[8009](#) [6111-517](#) [FS881](#) [40705X](#) [USB390A](#) [780417A](#) [GPT-9904](#) [382099](#) [589250](#) [780418](#) [C.A 6131](#) [BK2408](#) [BM239R](#) [BM839](#) [FLUKE 107](#)
[FLUKE-179-2/IMSK](#) [NP06-200P1](#) [NP10-200P1](#) [NP10-500P1](#) [P 1020 A](#) [P 1035](#) [P 1075](#) [P 1080](#) [P 8102](#) [P 3365](#) [P 3315](#) [P 3320](#) [P 3335](#) [P](#)
[3340](#) [P 3410](#) [KEWMATE 2000A](#) [MD9016](#) [MTX 3292B-BT](#) [NP06-100P1](#) [NP15-500M1](#) [NP15-600M1](#) [NP15B-500M1](#) [NP15B-600M1](#) [P](#)
[3415](#) [P 3430](#) [P 3690](#) [P 3725](#) [P 4390](#) [SEFRAM7334](#) [SEFRAM7202](#) [SEFRAM7203](#) [SEFRAM7220](#) [SEFRAM7204](#) [SEFRAM7221](#)
[SEFRAM7303](#)