

# MV15 Series (LED Voltage Meters)

## FEATURES

- Measurement Function
  - 1  $\emptyset$  Voltage (True RMS)
- 3 Digit LED Display




## CAT. NO.

## MV15-110V-CU

## MV15-DC-20V-110V-CU MV15-DC-200V-110V-CU

<b>Display</b>		
Display Type	7 segment LED Display	7 segment LED Display
Digits	3 digits	3 digits
Bargraph	-	-
Display Range	0 - 516V	0 - 516V
<b>Supply Specification</b>	110 VAC +/-20% (60Hz)	110 VAC +/-20% (60Hz)
<b>Input Specification</b>		
Electrical Wire System	1 Phase (2 wire)	1 Phase (2 wire)
Input Voltage Range	50 ~ 516 VAC	0 ~ 20 VDC (MV15-20V) 0 ~ 200 VDC (MV15-200V)
Frequency	50/60 Hz	50/60 Hz
Input Impedance	1 M $\Omega$ (+/-5%)	1 M $\Omega$ (+/-5%)
<b>Parameter Resolution</b>		
Voltage	1V	1V
Sample Rate	3 samples / sec.	3 samples / sec.
<b>Accuracy Class</b>		
Voltage	+/- 0.5% of Full-Scale Value	+/- 0.5% of Full-Scale Value
<b>Output Specifications</b>		
Pulse Output	-	-
<b>Communication</b>	-	-
<b>Programmable Parameters</b>	-	-
<b>Environmental Specifications</b>		
Temperature	Operating: -10°C~55°C, Storage: -20°C~ 75°C	Operating: -10°C~55°C, Storage: -20°C~ 75°C
Humidity	Up to 85% RH	Up to 85% RH
Protection Level	IP65 for Faceplate	IP65 for Faceplate
<b>Physical Specifications</b>		
Size	1/8 DIN, 48 mmx 96 mm	1/8 DIN, 48 mmx 96 mm
Weight	0.38 lbs (170g)	0.38 lbs (170g)
Terminal Size Acceptability and Torque	20-14 AWG (0.5 - 2.5mm <sup>2</sup> ), 6-7 lb-in. (0.68 - 0.79Nm)	20-14 AWG (0.5 - 2.5mm <sup>2</sup> ), 6-7 lb-in. (0.68 - 0.79Nm)

## DIMENSIONS

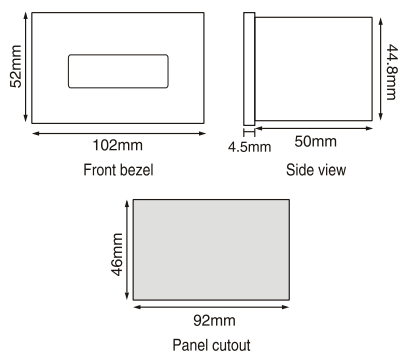

MV15 Series

## TERMINAL CONNECTIONS



MV15-110V-CU (AC Type)



MV15-DC-20V-110V-CU (DC Type)  
MV15-DC-200V-110V-CU (DC Type)

230 VAC versions also available, please consult Altech.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Panel Meters](#) category:*

*Click to view products by [Altech](#) manufacturer:*

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86427-26](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [25.350.0553.0](#) [20046-20](#) [20182-23](#) [AP1020](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [MV15-DC-20V-110V-CU](#) [HB8260R4890](#) [20125-21](#) [86640-00](#) [2CMA100166R1000](#) [N27D 00M0](#) [DMG 100](#) [DMG 110](#) [DMG 800 L01](#) [DMK 01](#) [DMK 01 R1](#) [DMK 11](#)