

**SEZ52C5V1-5**  
**SMD Zener Diodes**

Revision: C

**General Description**

Silicon planar zener diode in a small plastic SOD-523 package.


**Features**

- Total power dissipation: 500mW
- Designed for mounting on small surface
- Extremely thin/leadless package
- Pb free product

**Functional diagram**



SOD-523

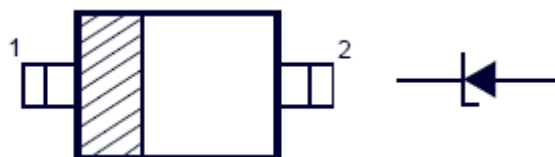

Note: 1-Cathode;2-Anode

**Absolute Maximum Ratings (T<sub>a</sub>=25°C)**

Symbol	Parameter	Value	Unit
	Zener Current see Table "Characteristics"		
P <sub>tot</sub>	Power Dissipation	500	mW
V <sub>F</sub>	Maximum Forward Voltage Drop at I <sub>F</sub> =100mA	1.25	V
IFSM	Forward current , surge peak 8.3 ms single half sine-wave superimposed on rate load (JEDEC method)	2.0	A
T <sub>S</sub>	Storage Temperature Range	-65 to +150	°C

**Electrical Characteristics**

Type	Zener Voltage			Operating resistance		Rising operating Resistance		Reverse current	
	VZ(V)			ZZT(Ohm)		ZZK(Ohm)		IR(uA)	
	Typ	Max	Iz(mA)	Max	Iz	Iz	Max	Iz	Max
<b>SEZ52C5V1-5</b>	5.10	-	5	55	5	0.5	500	2	2

**Breakdown Characteristics  $T_j = \text{constant}$  (pulse)**

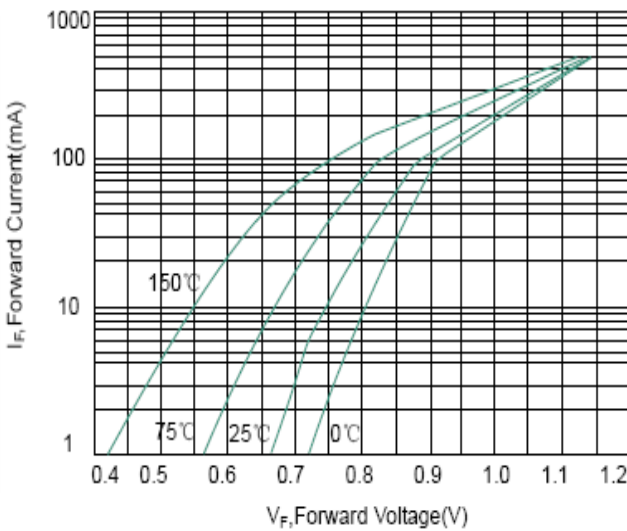


Fig 1. Typical Forward Voltage

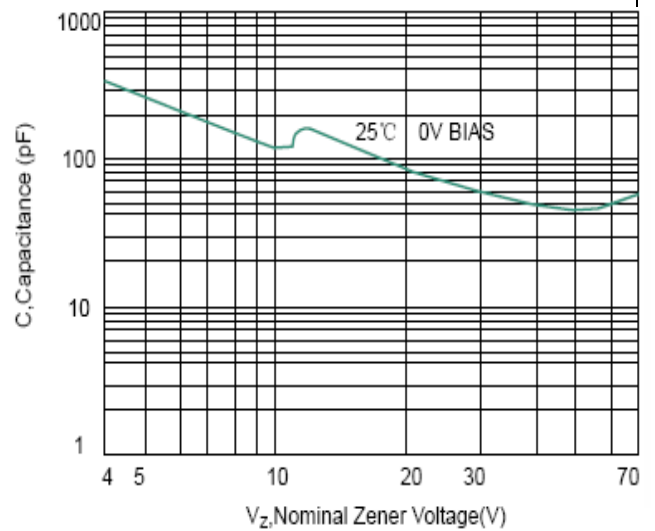


Fig 2. Typical Capacitance

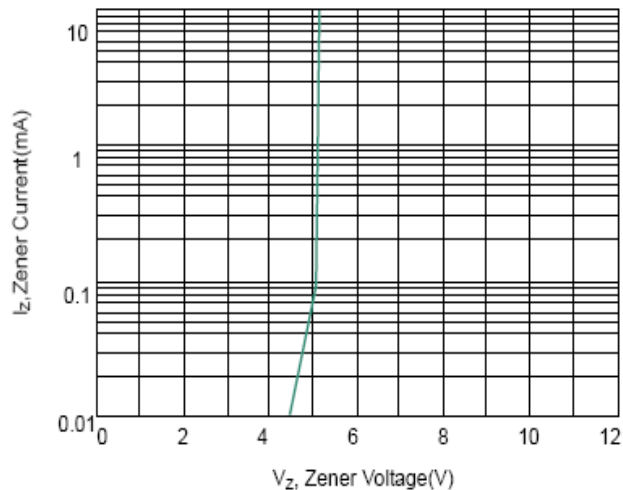


Fig 3. Zener Voltage versus Zener Current



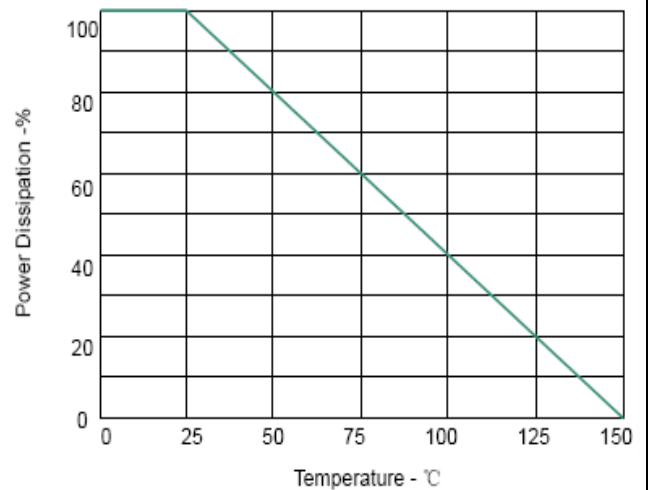


Fig 4. Steady State Power Detating

## SOD-523 Mechanical Data

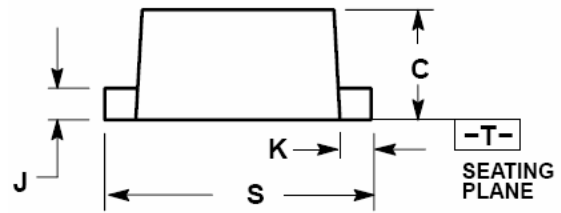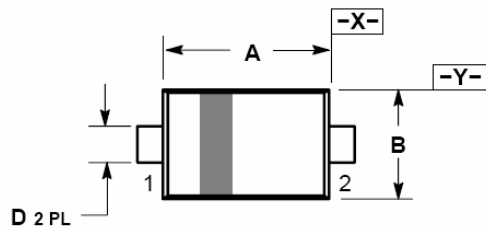

D 2 PL

⊕ 0.08 (0.003) M T X Y

Dim	Millimeters			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.10	1.20	1.30	0.043	0.047	0.051
B	0.70	0.80	0.90	0.028	0.032	0.035
C	0.50	0.60	0.70	0.020	0.024	0.028
D	0.25	0.30	0.35	0.010	0.012	0.014
J	0.07	0.14	0.20	0.0028	0.0055	0.0079
K	0.15	0.20	0.25	0.006	0.008	0.010
S	1.50	1.60	1.70	0.059	0.063	0.067

The SINO-IC logo is a registered trademark of ShangHai Sino-IC Microelectronics Co., Ltd.  
© 2005 SINO-IC – Printed in China – All rights reserved.

**SHANGHAI SINO-IC MICROELECTRONICS CO., LTD**

**Add:** Building 3, Room 3401-03, No.200 Zhangheng Road, ZhangJiang Hi-Tech Park, Pudong,  
Shanghai 201203, China

**Phone:** +86-21-33932402 33932403 33932405 33933508 33933608

**Fax:** +86-21-33932401

**Email:** [webmaster@sino-ic.com](mailto:webmaster@sino-ic.com)

**Website:** <http://www.sino-ic.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Zener Diodes](#) category:*

*Click to view products by [SINO-IC](#) manufacturer:*

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)  
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)  
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)  
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZM30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)  
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)  
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)